




Test Procedure for the NCS29001DGEVB Evaluation Board

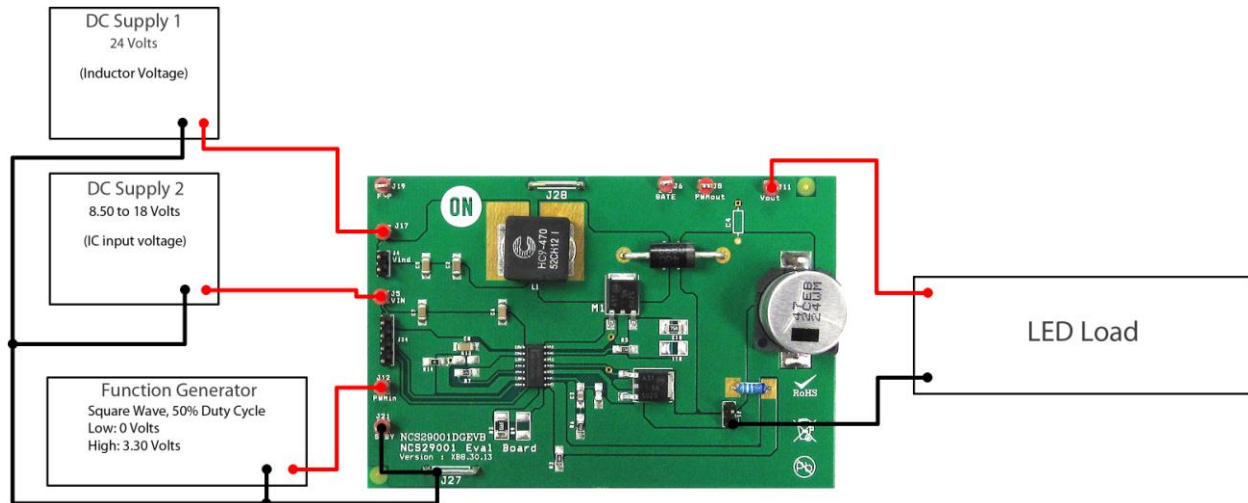

1. Board Setup:

- IC input voltage 8.5V to 18V
- Inductor input voltage 24V
- LED current 200 mA (**BE SURE LED CURRENT DOES NOT EXCEED 200 mA!**)
- Switching frequency 200kHz
- LED string 76V total forward voltage

2. Power Supply:

- Refer to diagram above for proper connections to board.
- Plug in the GND first.
- Connect output load
- Connect IC input voltage
- Connect Inductor input voltage
- Connect function generator
- Power on

3. Enable Device Through STBY and PWMin:

- Bring device out of standby by connecting STBY pin to ground
- Apply PWM signal centered at 1.65 V with 3.30 V_{pk-pk} to PWMin (100Hz to 300Hz) to engage soft-start power up
- Adjust PWM duty cycle to change LED brightness

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Development Tools](#) category:

Click to view products by [ON Semiconductor](#) manufacturer:

Other Similar products are found below :

[MIC2870YFT EV](#) [ADP8860DBCP-EVALZ](#) [LM3404MREVAL](#) [ADM8843EB-EVALZ](#) [TDGL014](#) [ISL97682IRTZEVALZ](#) [LM3508TLEV](#)
[EA6358NH](#) [MAX16826EVKIT](#) [MAX16839EVKIT+](#) [TPS92315EVM-516](#) [MAX6956EVKIT+](#) [OM13321,598](#) [DC986A](#) [DC909A](#) [DC824A](#)
[STEVAL-LLL006V1](#) [IS31LT3948-GRLS4-EB](#) [104PW03F](#) [PIM526](#) [PIM527](#) [MAX6946EVKIT+](#) [MAX20070EVKIT#](#) [MAX21610EVKIT#](#)
[MAX6951EVKIT](#) [MAX20090BEVKIT#](#) [MAX20092EVSYS#](#) [PIM498](#) [AP8800EV1](#) [ZXLD1370/1EV4](#) [MAX6964EVKIT](#) [TLC59116EVM-](#)
[390](#) [1216.1013](#) [TPS61176EVM-566](#) [TPS61197EVM](#) [TPS92001EVM-628](#) [1270](#) [1271.2004](#) [1272.1030](#) [1273.1010](#) [1278.1010](#) [1279.1002](#)
[1279.1001](#) [1282.1000](#) [1293.1900](#) [1293.1800](#) [1293.1700](#) [1293.1500](#) [1293.1100](#) [1282.1400](#)