# **SB07-03C**

# ON Semiconductor®

# Schottky Barrier Diode 30V, 0.7A, Low IR, Single CP

http://onsemi.com

#### **Applications**

· High frequency rectification (switching regulators, converters, choppers)

#### **Features**

- Low forward voltage (VF max=0.55V)
- · Low switching noise
- · Low leakage current and high reliability due to highly reliable planar structure

#### **Specifications**


#### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Peak Reverse Voltage	VRRM		30	V
Nonrepetitive Peak Reverse Surge Voltage	VRSM		35	V
Average Output Current	I <sub>O</sub>		700	mA
Surge Forward Current	IFSM	50Hz sine wave, 1 cycle	5	А
Junction Temperature	Tj		-55 to +125	°C
Storage Temperature	Tstg		-55 to +125	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### **Package Dimensions**

unit : mm (typ) 7013A-004

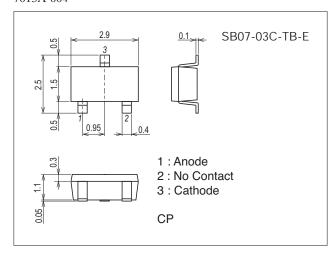

#### **Product & Package Information**


• Fast reverse recovery time (trr max=10ns)

• Package : CP

• JEITA, JEDEC : SC-59, TO-236, SOT-23, TO-236AB


• Minimum Packing Quantity: 3,000 pcs./reel

#### Packing Type: TB Marking






#### **Electrical Connection**



#### Electrical Characteristics at Ta=25°C


Parameter	Symbol	Conditions	Ratings			Unit	
Parameter	Symbol	Conditions	min	typ	max	Offic	
Reverse Voltage	VR	I <sub>R</sub> =300μA	30			V	
Forward Voltage	VF	I <sub>F</sub> =700mA			0.55	V	
Reverse Current	IR	V <sub>R</sub> =15V			80	μΑ	
Interterminal Capacitance	С	V <sub>R</sub> =10V, f=1MHz		25		pF	
Reverse Recovery Time	t <sub>rr</sub>	IF=IR=100mA, See specified Test Circuit.			10	ns	
	Rth(j-a)1			420		°C/W	
Thermal Resistance	Rth(j-a)2	Mounted in Cu-foiled area of 16mm <sup>2</sup> ×0.2mm	330			°C/W	
		on glass epoxy board		330		C / W	

#### trr Test Circuit

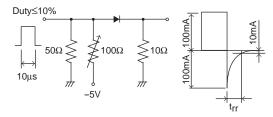

#### **Ordering Information**


Device	Package	Shipping	memo	
SB07-03C-TB-E	СР	3,000pcs./reel	Pb Free	

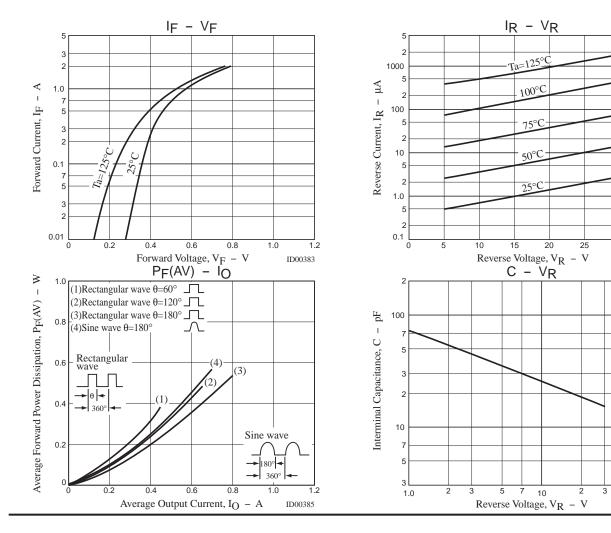

ID00386

ID00384

f=1MHz

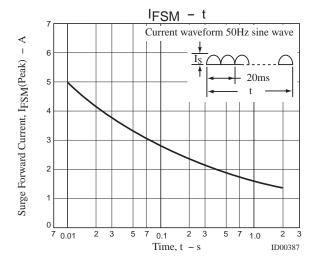


#### **Embossed Taping Specification**

#### SB07-03C-TB-E


#### 1. Packing Format

Package Name	Carrier Tape	Maximum Number of devices contained (pcs)			Packing format		
	Туре	Reel	Inner box	Outer box	Inner $BOX(C-1)$	Outer BOX (A-7)	
СР	СР	3, 000	15, 000	90,000	5 reels contained	6 inner boxes contained	
					Dimensions:mm (external)	Dimensions:mm (external)	
					183×72×185	440×195×210	

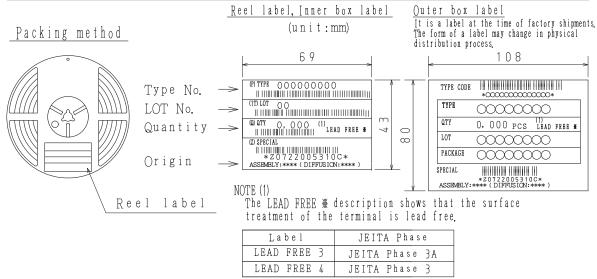


#### 7. Taping configuration

2-1. Carrier tape size (unit:mm)

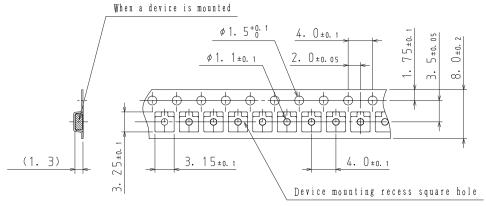


2-2. Device placement direction

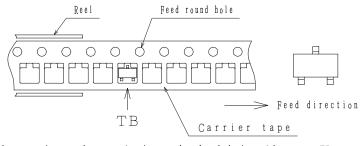


Those with one electrode terminal on the feed hole side·····TB

### **Outline Drawing**

## SB07-03C-TB-E

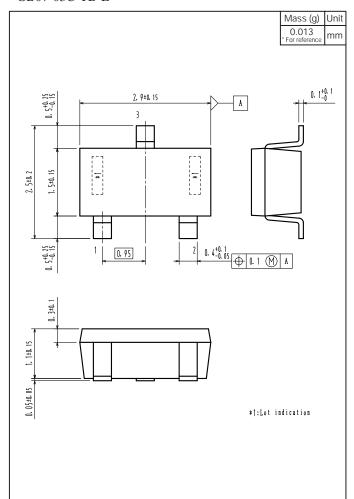

#### Land Pattern Example

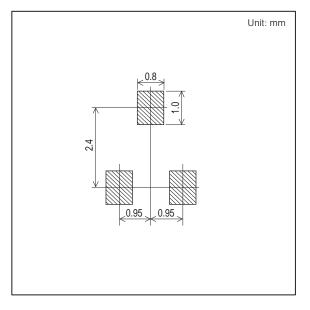

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below:

MA4E2039 D1FH3-5063 MBR0530L-TP MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30

BAS16E6433HTMA1 BAT 54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SK310-T

SK32A-LTP SK33A-TP SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G

SB007-03C-TB-E SK32A-TP SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF

CDBQC0240LR-HF ACDBA340-HF ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246

NRVBM120ET1G NSR01L30MXT5G NTE573