Type ANF Automotive / Marine Limiter Fast Acting



www.optifuse.com

(619) 593-5050

Specifications:

· Voltage Rating: 32 VDC

• Amperage Rating: 40A, 50A, 60A, 80A, 100A, 125A, 130A, 150A, 175A, 180A, 200A, 225A, 250A, 275A, 300A, 400A

· Construction:


Body Material: Bakelite **Terminals:** Gold-plated 40A ~ 80A — Brass

Time Characteristics	
% of Rated Current	Clearing Time
100%	Min 4h
250%	Max 300s

Recommended Mounting:

Optifuse Fuse Block BLC-09 to 200A Optifuse Fuse Block BLC-209 to 800A

Mechanical Dimensions: Inches [mm]

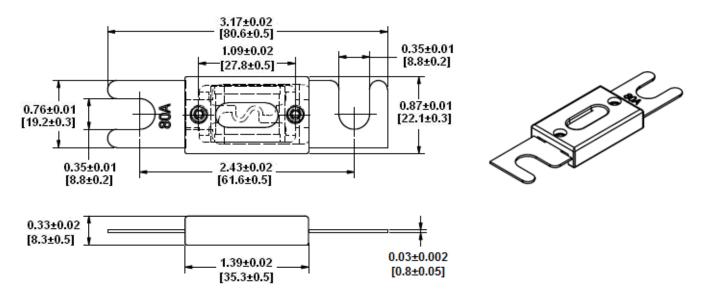

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev D 02/2019 - Page: 1/2

Code J01-01H


Type ANF Automotive / Marine Limiter Fast Acting



www.optifuse.com

(619) 593-5050

Time Current Curve Graph

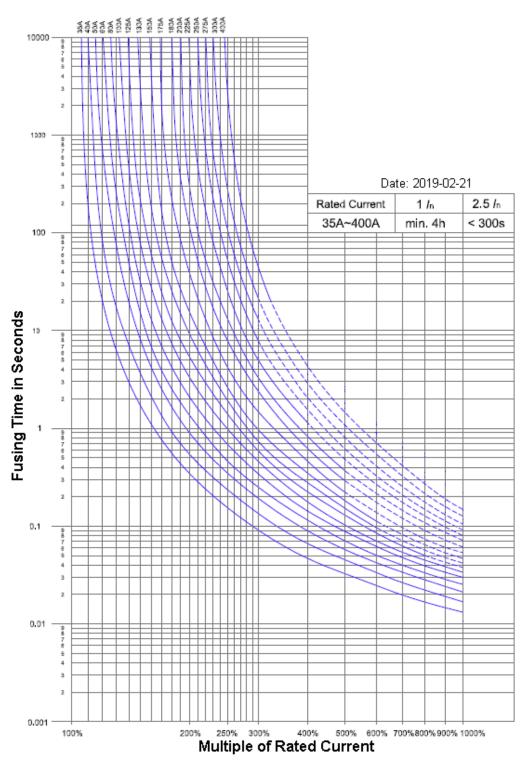

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by Optifuse manufacturer:

Other Similar products are found below:

HBO-10 HBO-100 HBO-150 HBO-40 HBO-50 AFX-150 AT-10 AT-30 AT-5 ATM-10ID ATM-4LP ACL-50 AFX-50 299080 HBO-15 AT-20 AT-3 0287015 142.7010.5502 FMM-15 0MIN015.HXGLO 0695030.PXPS 0695040.PXPS 0297003.WXT 0MIN025.HXGLO 0MIN030.HXGLO 0695015.PXPS 0695050.PXPS 0695060.PXPS MRBF-075 MIDA-50A 0200300 02400106P 0297002.WXT 0297004.WXT 0297010.WXT 0297015.WXT 0297020.WXT 0297025.WXT 0297030.WXT 029707.5WXT 0602925 0602930 0602935 0602940 0602950 0602960 0611100 0611125 0611150