
Type ANX-I Automotive Blade Fuse Maxi Size – LED Indicating

Specifications:

- Voltage: 32VDC
- · Amperage: 20A, 30A, 40A, 50A, 60A, 70A, 80A, 100A
- Body: PA 66
- Indicating LED when fuse is opened
- Terminals: Zinc alloy
- Designed to meet SAE and ISO 8820 Standards.
- Interrupt Rating 1000A @ 32 VDC

Time Characteristics:				
% of Rated Current	Current Rating	Min Hold Time	Max Hold Time	
135%	20~60A	60s	1800s	
135%	70~100A	60s	3600s	
200%	20~100A	4s	60s	
350%	20~100A	200ms	7s	

Mechanical Dimensions: Inches [mm]

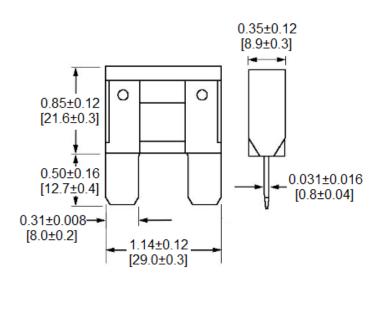




www.optifuse.com

(619) 593-5050

Part Number	Amperage	Body Color
ANX-I-20A	20A	Yellow
ANX-I-30A	30A	Green
ANX-I-40A	40A	Orange
ANX-I-50A	50A	Red
ANX-I-60A	60A	Blue
ANX-I-70A	70A	Tan
ANX-I-80A	80A	Clear
ANX-I-100A	100A	Violet

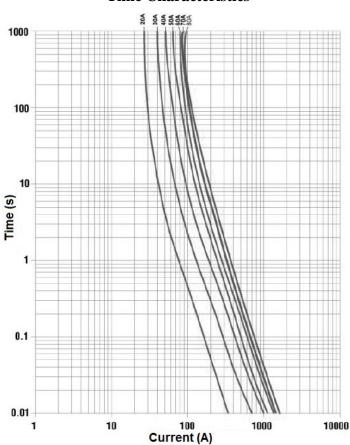

Time Characteristics

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Optifuse manufacturer:

Other Similar products are found below :

FSC-3.5A TSA-250MA BLR-304 BLR-504 BLC-05-GTA BLR-I-504 BLM-304 CBW57-EL4-10A FPK-10A FPK-1A FPK-30A LPM-08 LPX-23B-08R-LOOP FPK-12A FPK-15A FPK-20A FPK-25A FPK-2A FPK-3A FPK-4A FPK-5A FPK-6A FPK-7A FPK-8A FPK-R-1.5A FPK-R-10A FPK-R-15A FPK-R-1A FPK-R-20A FPK-R-25A FPK-R-2A FPK-R-30A FPK-R-3A FPK-R-4A FPK-R-5A FPK-R-6A FPK-R-8A PMG-KB-01-Q2S LPM-01B-12R ACB-12-V-50A LPR-13C-10R ACBP4-PM-5A BLR-306 ACB-12-V-30A CBW57-EL4-5A CBW57-ES-5A CBW57-PB-10A-5X CBW57-PS-10A-5X CBW57-PS-3A-1X CBW28-1A