## Type LPR-03 In-Line Fuse Holder Automotive Blade Fuses - APRs Splashproof Type



www.optifuse.com

(619) 593-5050

#### **Ratings:**

**Fuse Type:** Automotive Blade – APRs, ANRs

Electrical Rating: 30A 58VAC

**The Ambient Temperature:** -40°C to +85°C

**Body: PVC** 

Cap: Splashproof type

**IP Rating:** IP65

Wire Sizes: # 10, # 12, # 14, #16, #18 AWG, UL 1015

**Standard Wire Colors:** Red, Black **Standard Body Colors:** Red, Black

Wire Length: 12 inches – End to End Loop

Available in various wire gauges and lengths, and body and wire

colors. Contact factory for those not listed above.

### **Mechanical Dimensions: Inches [mm]**


# Part number format LPR-03X-##Z

Where X = Body color - Red, Black

## = Wire gauge

 $\mathbf{Z} = \text{Wire color } (\mathbf{R} \text{ or } \mathbf{B})$ 

Wire	Max.
Gauge	Amperage
10 AWG	40 A
12 AWG	30 A
14 AWG	20 A
16 AWG	15 A
18 AWG	10 A

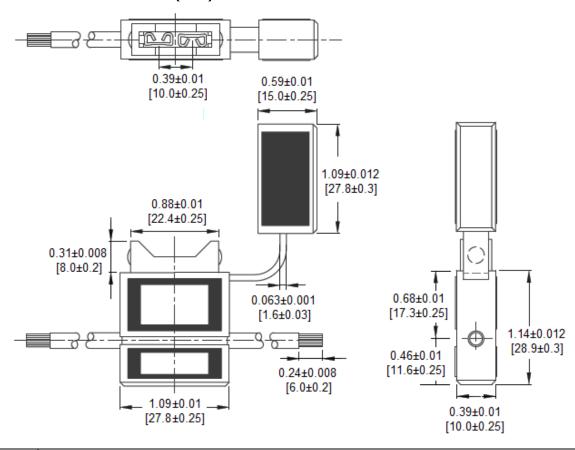

### Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

-Not designed for prolonged liquid exposure or submersible applications.

Note: All specifications subject to change without notice.

Rev E 12/2022 - Page: 1/1
Code G02-01H

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Optifuse manufacturer:

Other Similar products are found below:

570-290-741P40 570-290-751P40 020417G 020418E 6R30A1B F600A3B 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A1S RF30A2B RF30A3SP 15600-08-10 BK/FHN19G BK/HHM BK/HKP-CCHH BK/HKP-JJ BK/HTJ-LES-FUSE HMG-241 HTJ-LES-FUSE C4044-1 2086-1 2193 2602 2650 178.000100 FHN31G1 T30A2B G4PB8 2660 2799 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BK/FHN31G1