

Type LPX-02 In-Line Fuse Holder Maxi Automotive Blade Fuses Splashproof Cap, Ignition Protected



www.optifuse.com

(619) 593-5050

Ratings:

Fuse Type: Maxi Automotive Blade - APXs, ANXs

Electrical Rating: 58VDC

Ambient/Operating Temperature: -40 °C to +85 °C

Body: PVC

Contacts: Brass with Tin Plated

Cap: Splashproof Cap

IP Rating: IP65

Ignition Protected

Standard Wire Sizes: #6 ~ #8 AWG





Standard Wire Colors: See table

Standard Body colors: Black

Standard Wire Length: 5 inches

Available in various wire gauges and lengths, and body and wire colors. Contact factory for those not listed above.

Mechanical Dimensions: Inches [mm]

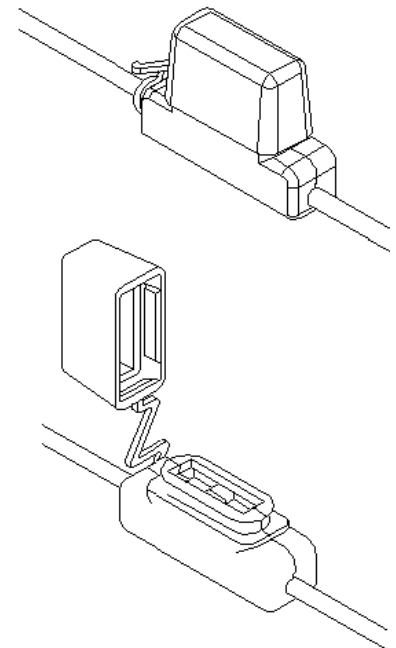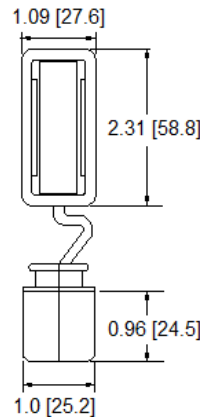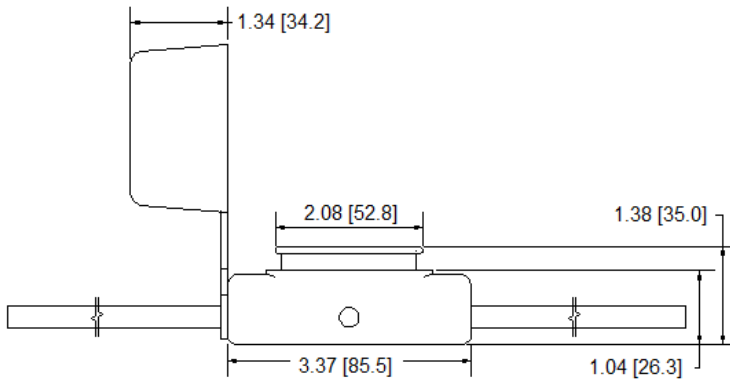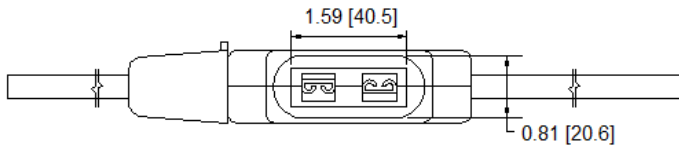

Part number format

LPX-02B-##Z

where ## = Wire gauge

Z = Wire color (R or B)

Standard Colors for Wire Gauges		
AWG	Standard Wire Color	Max Amperage
#6	Red	80A
#8	Black	60A

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.
- Not designed for prolonged liquid exposure or submersible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)