# Type LPX-02 In-Line Fuse Holder Maxi Automotive Blade Fuses Splashproof Cap, Ignition Protected



www.optifuse.com

(619) 593-5050

#### **Ratings:**

Fuse Type: Maxi Automotive Blade - APXs, ANXs

**Electrical Rating: 58VDC** 

**Ambient/Operating Temperature:** -40 °C to +85 °C

**Body: PVC** 

Contacts: Brass with Tin Plated

**Cap:** Splashproof Cap **IP Rating:** IP65 **Ignition Protected** 

Standard Wire Sizes: #6 ~ #8 AWG Standard Wire Colors: See table Standard Body colors: Black Standard Wire Length: 5 inches

Available in various wire gauges and lengths, and body and wire colors. Contact factory for those not listed above.

#### **Mechanical Dimensions: Inches [mm]**


Part number format

LPX-02B-##Z

where ## = Wire gauge

 $\mathbf{Z}$  = Wire color ( $\mathbf{R}$  or  $\mathbf{B}$ )

<b>Standard Colors for Wire Gauges</b>		
AWG	Standard Wire Color	Max Amperage
#6	Red	80A
#8	Black	60A

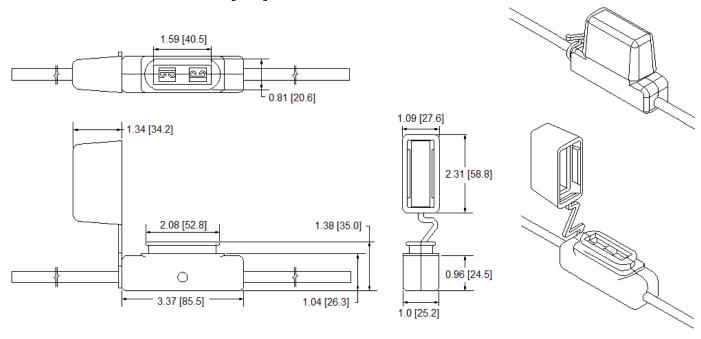

### Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

-Not designed for prolonged liquid exposure or submersible applications.

Note: All specifications subject to change without notice. Rev G 02/2021 - Page: 1/1 Code J01

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Optifuse manufacturer:

Other Similar products are found below:

570-290-741P40 570-290-751P40 020417G 020418E 6R30A1B F600A3B 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A1S RF30A2B RF30A3SP 15600-08-10 BK/FHN19G BK/HHM BK/HKP-CCHH BK/HKP-JJ BK/HTJ-LES-FUSE HMG-241 HTJ-LES-FUSE C4044-1 2086-1 2193 2602 2650 178.000100 FHN31G1 T30A2B G4PB8 2660 2799 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BK/FHN31G1