

**Type PHC  
PCB Mounted Horizontal Fuse  
Holder  
5mm x 20mm**



www.optifuse.com (800) 621-0326

**Electrical Rating:** 6.3A, 250VAC

**Operating Power:** 2.5 W

**Fuse Style:** 5mm x 20mm

**Material:** Frame and Cap: Thermoplastic (UL Flame: 94V-0)

Terminal: Nickel Plated Copper Alloy

**Panel Thickness:** .031 Min / .177 Max [.08mm Min, 4.5mm Max]

**Mounting:** PCB mounting


**Cap:** Finger Grip / Screwdriver Slot Combo

Bayonet Knob


**Agency Standards and Listings:**



**Product Dimensions: Inches[mm]**

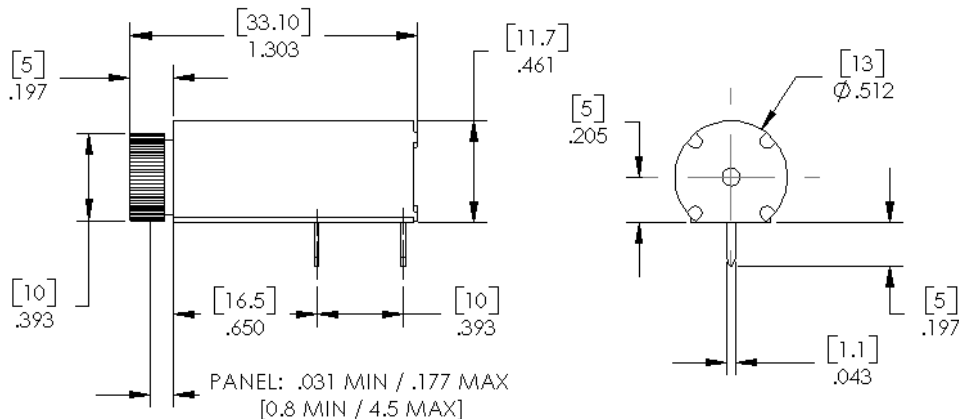

**Mounting Holes: Inches[mm]**

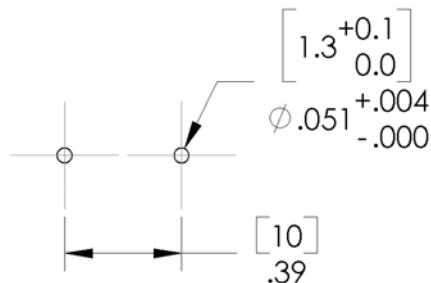

**Warning:**



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse.
- Avoid contact of Fuse Holder with chemical solvent. Prolonged contact will damage the device performance.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [Optifuse](#) manufacturer:*

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)  
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)  
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)  
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)