

Type TFLP Automotive Fuse Link Locking Female Terminal



www.optifuse.com (619) 593-5050

Specifications:

Voltage: 32 VDC

Amperage: 45A, 65A, 75A

Interrupting Rating: 5,000A @ 32 VDC


Material: Body - Nylon and Glass Fiber
Cover - PC

Agency Standards and Listings:

JASO D612-4:2001

| Time Characteristics | | |
|----------------------|---------------|---------------|
| % of rated current | Min hold time | Max hold time |
| 110% | 4h | |
| 150% | 100s | |
| 200% | 2s | 60s |
| 300% | | 5s |
| 400% | | 2s |

Mechanical Dimensions: Inches [mm]

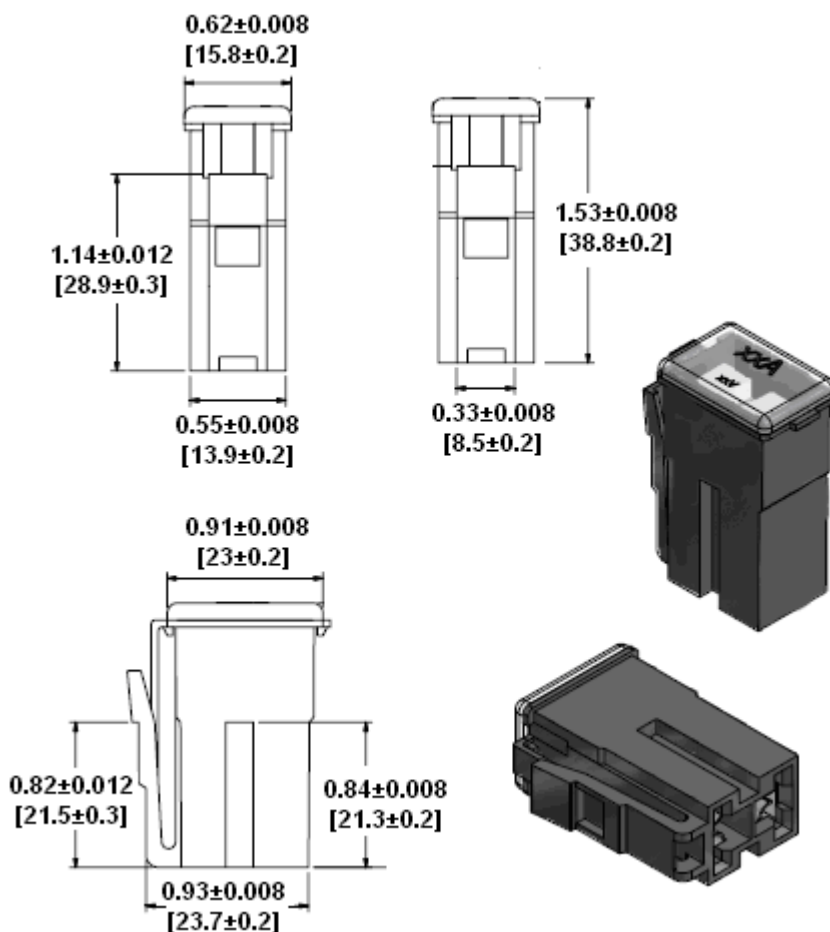

| Part Number | Ampere Rating | Housing Color |
|-------------|---------------|---------------|
| TFLP-45A | 45A | Red |
| TFLP-65A | 65A | Black |
| TFLP-75A | 75A | Gray |

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Fuses](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[HBO-10](#) [HBO-100](#) [HBO-150](#) [HBO-40](#) [HBO-50](#) [AFX-150](#) [AT-10](#) [AT-30](#) [AT-5](#) [ATM-10ID](#) [ATM-4LP](#) [ACL-50](#) [AFX-50](#) [299080](#) [HBO-15](#)
[AT-20](#) [AT-3](#) [0287015](#) [142.7010.5502](#) [FMM-15](#) [0MIN015.HXGLO](#) [2010T1.25A250V](#) [0695030.PXPS](#) [0695040.PXPS](#) [0297003.WXT](#)
[0MIN025.HXGLO](#) [0MIN030.HXGLO](#) [0695025.PXPS](#) [0695015.PXPS](#) [0695050.PXPS](#) [0695060.PXPS](#) [MRBF-075](#) [0200300](#) [02400106P](#)
[0297002.WXT](#) [0297004.WXT](#) [0297010.WXT](#) [0297015.WXT](#) [0297020.WXT](#) [0297025.WXT](#) [0297030.WXT](#) [029707.5WXT](#) [0602925](#)
[0602930](#) [0602935](#) [0602940](#) [0602950](#) [0602960](#) [0611100](#) [0611125](#)