

Type TSD

Time-Delay Glass Tube Fuse

5 x 20 mm



www.optifuse.com (619) 593-5050

Agency Standards and Listings:



CCC	100mA~6.3A
CQC	8A,10A,12.5A,16A
SEMKO	125mA~10A,12.5A
VDE	125mA~10A,12.5A
BSI	125mA~6.3A
IMQ	125mA~6.3A
PSE	1A~15A
KC	125mA~6.3A
CE	100mA~20A

IEC: 60127

Interrupt Ratings:

35A or 10 In 250V AC Whichever is Greater

Time Characteristics

Rated Current	210%		275%		400%		1000%	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
100mA	2 min	200 ms	10 sec	40 ms	3 sec	10 ms	300 ms	
125mA ~10A	2 min	600 ms	10 sec	150 ms	3 sec	20 ms	300 ms	
> 10A	5 min	600 ms	15 sec	150 ms	5 sec	20 ms	400 ms	

Operating Temperature:

-55°C to +125°C

Material:


- Glass Body/Nickel Plated Brass Caps
- Lead Wire Ø0.65mm - < 10A
- Ø0.8mm - 10A ~ 15A
- Ø1.0mm - > 15A

Packaging:

TSD 1000 pcs; TSD-P 500 pcs per box.

Cartridge Part number	Axial Lead Part number	Ampere Rating	Voltage Rating	I ² t A ² Sec
TSD-100mA	TSD-P-100mA	100mA	250V	0.0223
TSD-125mA	TSD-P-125mA	125mA		0.0417
TSD-160mA	TSD-P-160mA	160mA		0.0767
TSD-200mA	TSD-P-200mA	200mA		0.1628
TSD-250mA	TSD-P-250mA	250mA		0.3808
TSD-315mA	TSD-P-315mA	315mA		0.4833
TSD-400mA	TSD-P-400mA	400mA		0.7968
TSD-500mA	TSD-P-500mA	500mA		1.362
TSD-630mA	TSD-P-630mA	630mA		1.583
TSD-800mA	TSD-P-800mA	800mA		3.004
TSD-1A	TSD-P-1A	1A		5.309
TSD-1.25A	TSD-P-1.25A	1.25A		3.879
TSD-1.6A	TSD-P-1.6A	1.6A		6.890
TSD-2A	TSD-P-2A	2A		12.33
TSD-2.5A	TSD-P-2.5A	2.5A		20.63
TSD-3.15A	TSD-P-3.15A	3.15A		36.91
TSD-4A	TSD-P-4A	4A		70.56
TSD-5A	TSD-P-5A	5A		108.7
TSD-6.3A	TSD-P-6.3A	6.3A		187.8
TSD-8A	TSD-P-8A	8A		314.9
TSD-10A	TSD-P-10A	10A	583.4	
TSD-12A	TSD-P-12A	12A	958.9	
TSD-12.5A	TSD-P-12.5A	12.5A	1045	
TSD-15A	TSD-P-15A	15A	1668	
TSD-16A	TSD-P-16A	16A	2231	
TSD-20A	TSD-P-20A	20A	3010	

Mechanical Dimensions: Inches [mm]

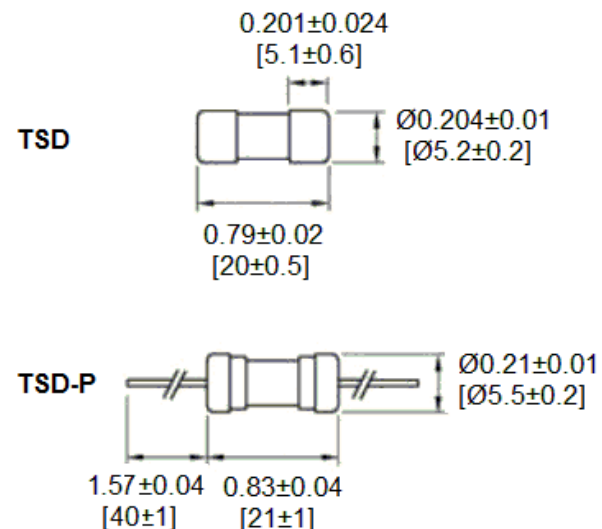


Type TSD
Time-Delay Glass Tube Fuse
5 x 20 mm




www.optifuse.com (619) 593-5050

Part Number TSD

TIME CURRENT CURVES

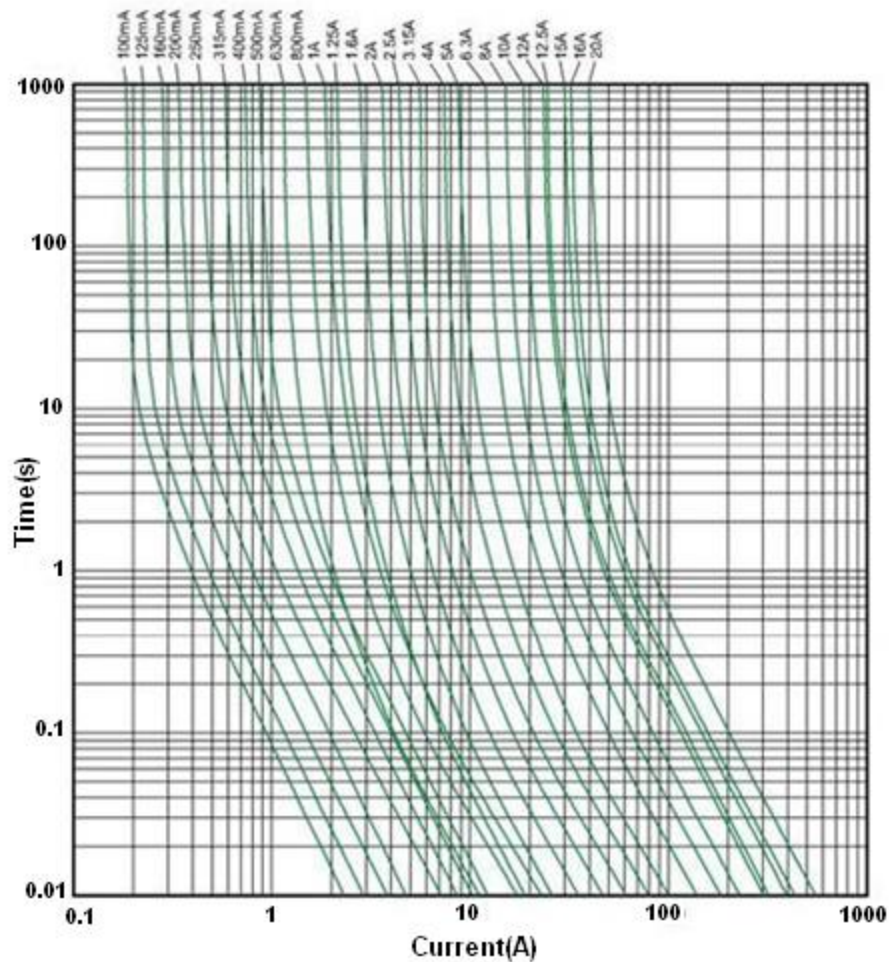

<p>Warning:</p> 	<ul style="list-style-type: none"> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Glass Fuse device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated. -Avoid contact of Glass Fuse device with chemical solvent. Prolonged contact will damage the device performance.
--	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[5TT3A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#) [FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-1-1/2RX](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#) [BK/MDM-15](#) [BK/MDM-3/4](#) [1C10X38AM](#) [S501-V-10A](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#)