



FEATURES

- High Optical Output
- 850 nm Peak Emission
- Hermetically Sealed TO-46 Package
- Wide Emission Angle to Cover a Large Area
- Extended Operating Temperature Range
- No Internal Coatings
- No Derating or Heat Sink Required to 80 °C

Electro-Optical Characteristics at 25 °C

Parameters	Test Conditions	Min	Typ	Max	Units
Total Power Output, P _o	I _F = 100 mA	19	26		mW
Peak Emission Wavelength, λ _P	I _F = 20 mA		850		nm
Spectral Bandwidth at 50 %, Δλ	I _F = 20 mA		40		nm
Half Intensity Beam Angle, θ	I _F = 20 mA		80		Deg
Forward Voltage, V _F	I _F = 100 mA		1.6	2	Volts
Reverse Breakdown Voltage, V _R	I _R = 10 μA	5	30		Volts
Rise Time	I _{FP} = 20 mA		20		nsec
Fall Time	I _{FP} = 20 mA		20		nsec

Absolute Maximum Ratings at 25°C

Parameters	Units
Power Dissipation ¹	200 mW
Continuous Forward Current	100 mA
Peak Forward Current (10 μs, 200 Hz) ²	300 mA
Reverse Voltage	5 Volts
Lead Soldering Temperature (1/16" from case for 10 sec)	260 °C

¹ Derate per thermal derating curve above 25 °C.

² Derate linearly above 25 °C


Thermal Parameters

Parameters	Units
Storage and Operating Temperature Range	-65 °C to 150 °C
Maximum Junction Temperature	150 °C
Thermal Resistance, R _{THJA} ¹	400 °C/W Typical
Thermal Resistance, R _{THJA} ²	135 °C/W Typical


¹ Heat transfer minimized by measuring in still air with minimum heat conducting through leads.

² Air circulating at a rapid rate to keep case temperature at 25 °C.


Maximum Rated Thermal Derating Curve

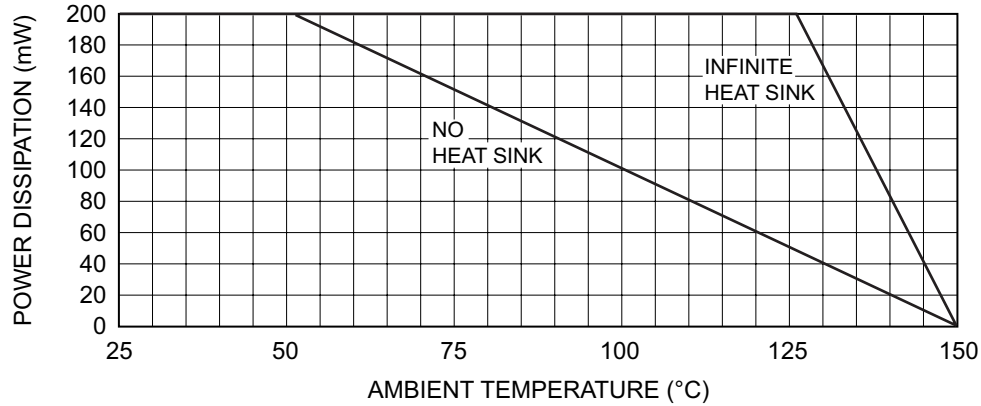


Typical Degradation Curve

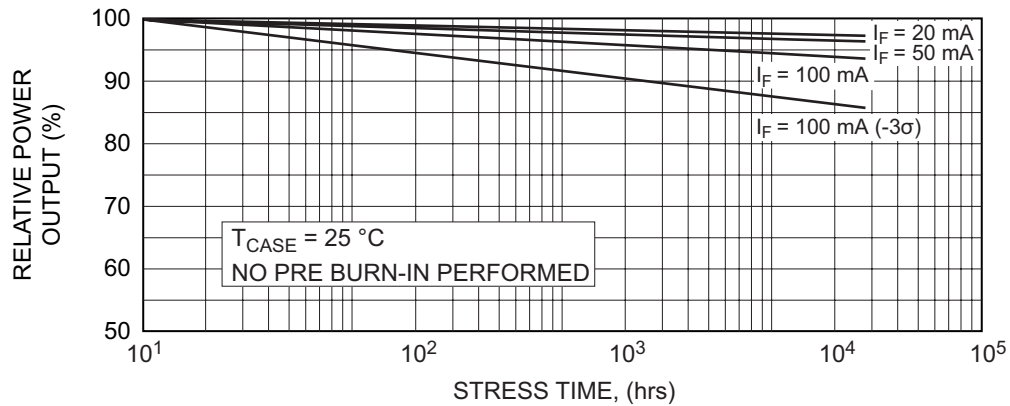


Typical Radiation Pattern

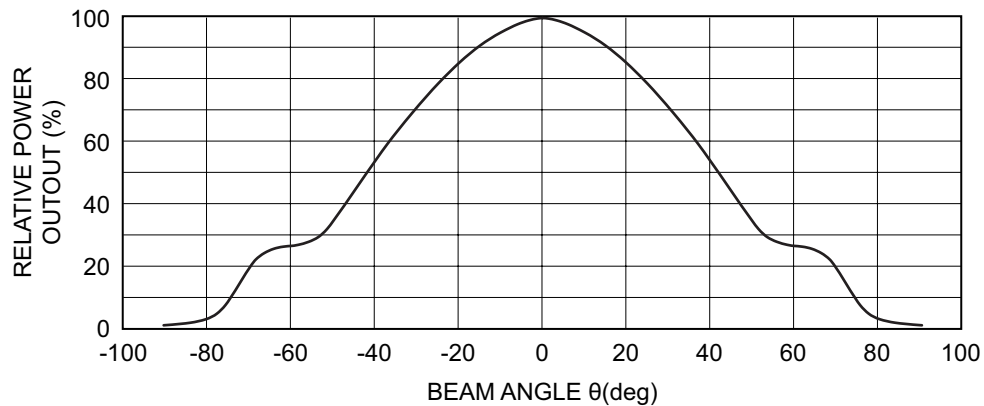


Typical Power Output vs Temperature

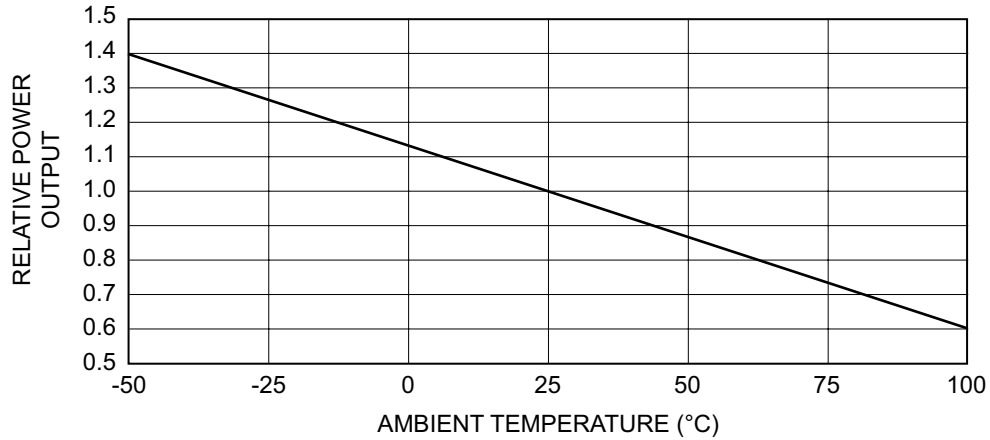


Typical Spectral Output

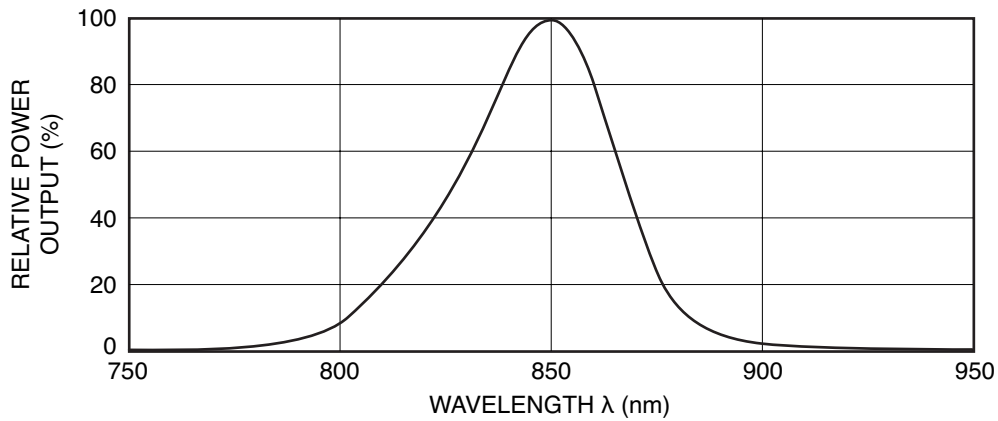

Typical Power Output vs Forward Current

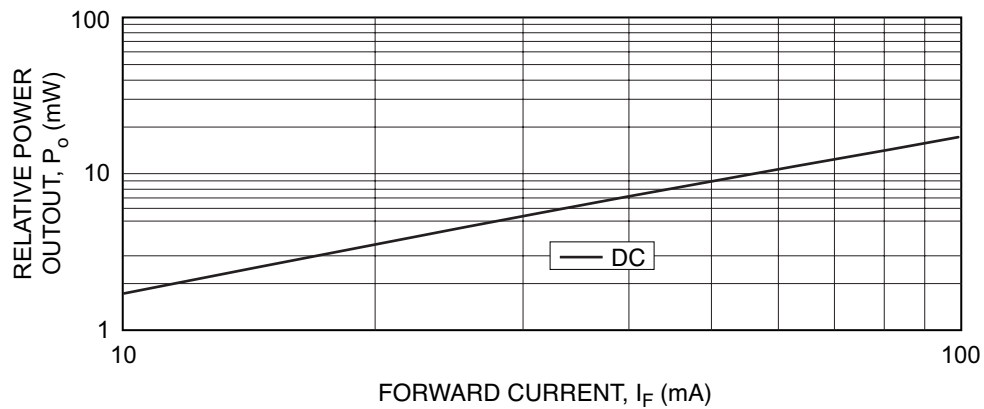

Package Information

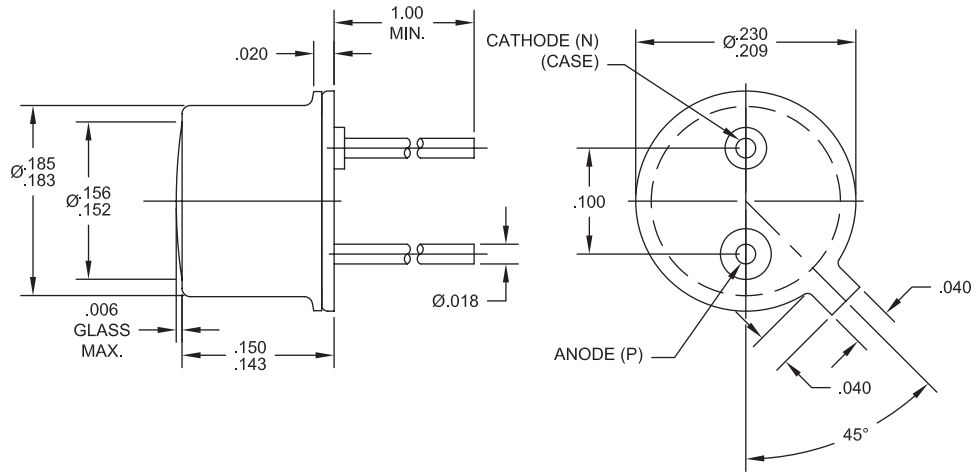

All surfaces are gold plated. Dimensions are nominal values in inches unless otherwise specified. Window caps are welded to the case.

Ordering Information

OD-850-008 High Temperature Wide Angle TO-46 850 nm Emitter Shipped in Clear Vacuum Tray

Specifications are subject to change without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [opto diode manufacturer](#):

Other Similar products are found below :

[UVG100](#) [AXUV16ELCS](#) [AXUV576C](#) [ODA-6WB-100M](#) [AXUV100AL](#) [ODA-6W-500M](#) [OD-669](#) [AXUV63HS1](#) [ODD-1B](#) [ODD-5WBISOL](#)
[SXUV100](#) [AXUV20HS1](#) [AXUV100CS](#) [OD-663](#) [ODD-1W](#) [OD-666](#) [AXUV100G](#) [ODD-15W](#) [ODD-42WB](#) [OD-469L](#) [ODA-6WB-500M](#)
[ODD-12WB](#) [ODD-5WISOL](#) [OD-624L](#) [ODD-3W-2](#) [OD-850WHT](#) [ODD-42W](#) [OD-850L](#) [OD-250](#) [OD-850W](#) [OD-110W](#) [ODD-1WB](#) [OD-110L](#) [OD-850FHT](#) [OD-850F](#)