



Opto Plus LED Corp.
1.8" Case Mold Type LED Display
OPD-S18012LE | OPD-S18013LE

● **EDIT HISTORY**

Version A : Nov. 04, 2020

Preliminary Spec.



Opto Plus LED Corp.

1.8" Case Mold Type LED Display

OPD-S18012LE | OPD-S18013LE

● FEATURES

- 1.8 inch (45.0 mm) Digit Height.
- Low current operation.
- Case mold type.
- RoHS compliant, Pb Free.

● DESCRIPTION

The device are 1.8 inch (45.0 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Red LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

	PART NO.	DESCRIPTION
	OPD-S18012LE-GW	Common Anode Gray face White segment
	OPD-S18013LE-GW	Common Cathode Gray face White segment
	OPD-S18012LE-BW	Common Anode Black face White segment
	OPD-S18013LE-BW	Common Cathode Black face White segment


RoHS Compliance



Pb Free.






MECHANICAL DIMENSIONS

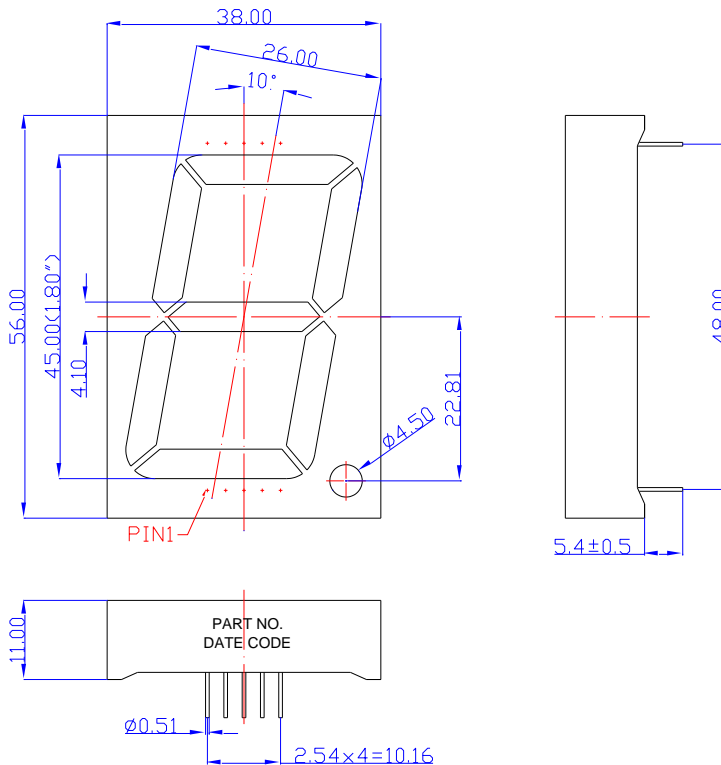

NOTES: Dimension is in millimeters. Tolerance is ± 0.25 mm unless otherwise noted.

TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

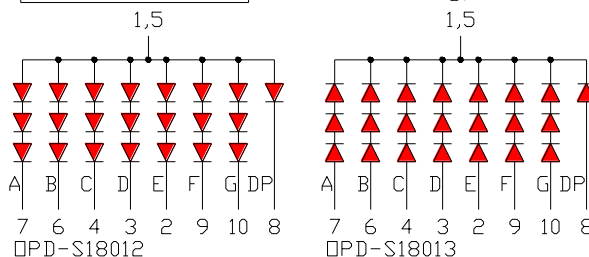

※EMITTED COLOR : SUPER BRIGHT RED



Opto Plus LED Corp.

1.8" Case Mold Type LED Display

OPD-S18012LE | OPD-S18013LE

● **LE: SUPER BRIGHT RED (AlGaInP/GaAs)**
 ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation per dice	P _{AD}	48	mW
Continuous forward current per dice	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +85	°C
Storage temperature	T _{STG}	-40 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward voltage per Segment (DP)	V _F	I _F =20mA	-	6.3 (2.1)	7.2 (2.4)	V
Reverse Current per dice	I _R	V _R =5V	-	-	10	μA
Peak Wavelength	λ _P	I _F =20mA	-	632	-	nm
Dominant Wavelength	λ _D	I _F =20mA	619	624	629	nm
Luminous Intensity	I _V	I _F =20mA	-	200	-	mcd
Spectral Line Half-Bandwidth	Δλ	I _F =20mA	-	20	-	nm





Opto Plus LED Corp.

1.8" Case Mold Type LED Display

OPD-S18012LE | OPD-S18013LE

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

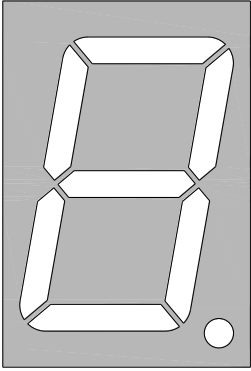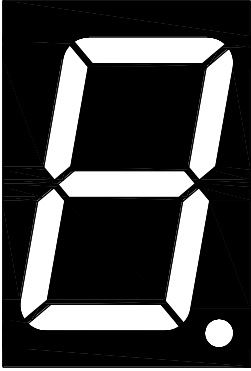-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPD-S18012LE-GW	Common Anode Gray face White segment
OPD-S18013LE-GW	Common Cathode Gray face White segment
OPD-S18012LE-BW	Common Anode Black face White segment
OPD-S18013LE-BW	Common Cathode Black face White segment



Opto Plus LED Corp.

1.8" Case Mold Type LED Display

OPD-S18012LE | OPD-S18013LE

● LE: SUPER BRIGHT RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

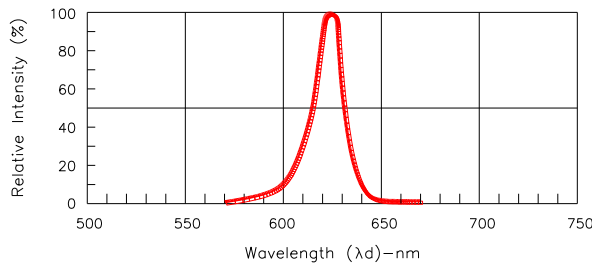


Fig.1-Relative Intensity VS. Wavelength

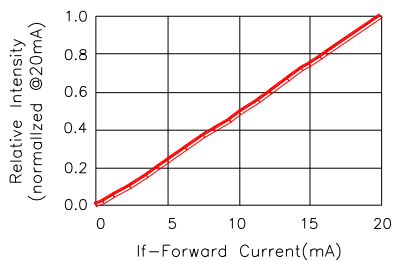


Fig.2-Relative Luminous Intensity vs. Forward Current

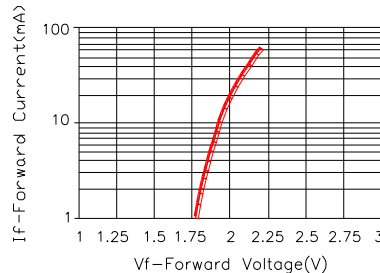


Fig.3-Forward Current vs. Forward Voltage

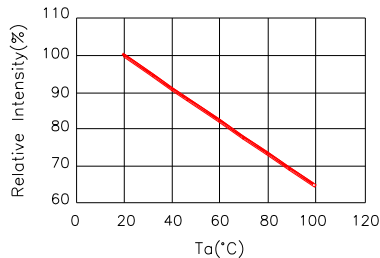


Fig.4-Relative Intensity(@20mA) vs. Ambient Temperature

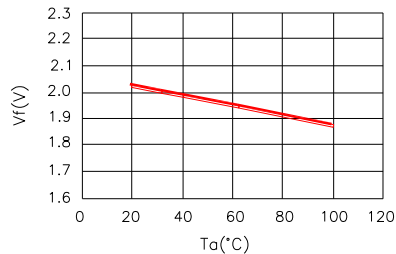


Fig.5-Forward Voltage(@20mA) vs. Ambient Temperature

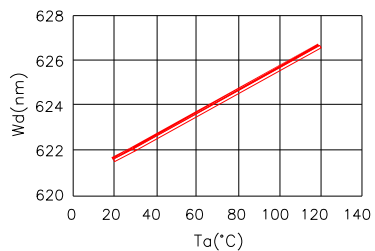


Fig.6-Dominant Wavelength(@20mA)
VS. Ambient Temperature


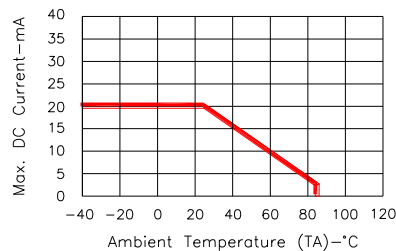


Fig.7-Max. Allowable DC Current
VS. Ambient Temperature

● RECOMMEND SOLDERING PROFILE

WAVE SOLDER PROFILE

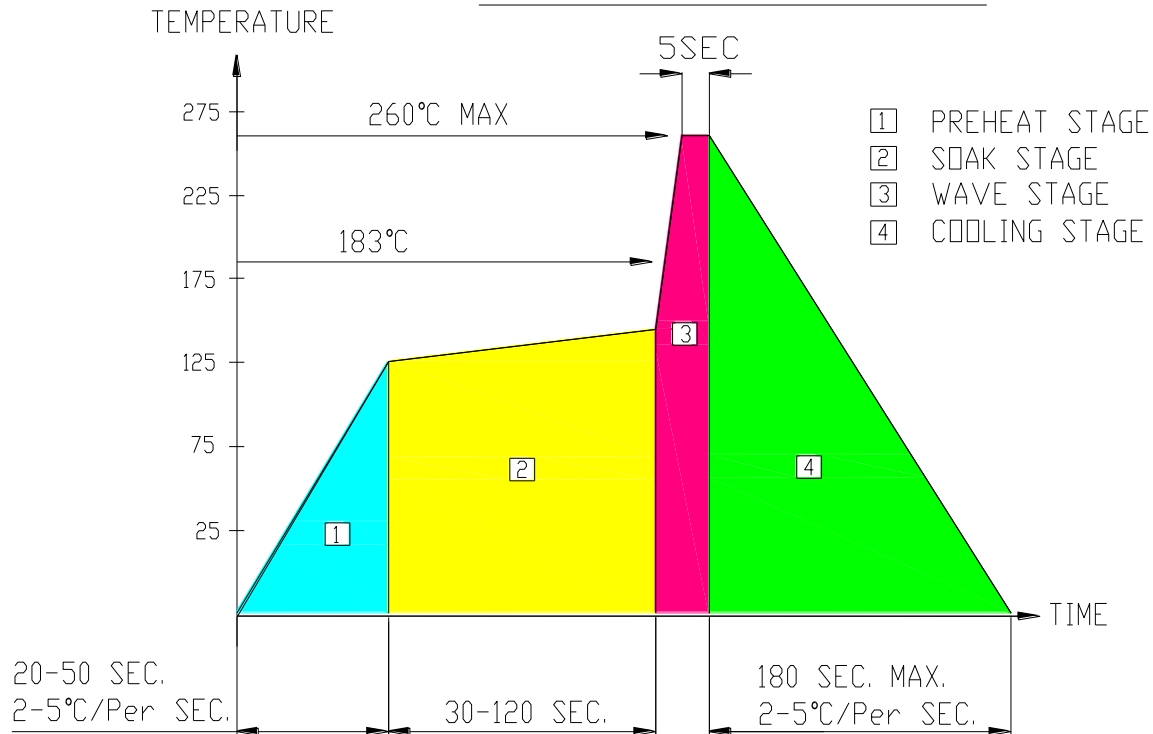

● Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK

Customer must finish rework within ≤ 3 sec under 350°C.
The head of soldering iron cannot touch copper foil.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Opto Plus Led Corp](#) manufacturer:

Other Similar products are found below :

[OPS-S2811LB-GW](#) [OPS-S2811PG-GW](#) [OPD-Q5620YG-BW](#) [OPD-S4030LB-BW](#) [OPD-S15013LE-BW](#) [OPD-Q5620LY-BW](#) [OPD-S4030LE-BW](#) [OPD-D5630G-BW](#) [OPD-S5620G-BW](#) [OPD-S18012LE-BW](#) [OPD-S5621LA-BW](#) [OPD-S3913LR-BW](#) [OPD-T5621LY-BW](#) [OPD-D3011LE-BW](#) [OPD-S4031LR-BW](#) [OPD-S10020UPG-BW](#) [OPD-S3011LB-BW](#) [OPD-D3910G-BW](#) [OPD-S3913LB-BW](#) [OPD-S5621G-BW](#) [OPD-S5621LR-BW](#) [OPD-S8022LY-BW](#) [OPL-3004YD-60-H1A](#) [OPS-S3910LB-GW](#) [OPD-D3010LB-BW](#) [OPD-S23011LE-BW](#) [OPD-S15012LY-BW](#) [OPD-T5620LB-BW](#) [OPD-D5630UPG-BW](#) [OPD-S8022LE-BW](#) [OPD-S5621LB-BW](#) [OPD-S23010UPG-BW](#) [OPD-S3010LB-BW](#) [OPD-D3911LR-BW](#) [OPD-S15013YG-BW](#) [OPD-S8022G-BW](#) [OPD-S4031UPG-BW](#) [OPD-T5620YG-BW](#) [OPD-D3911LB-BW](#) [OPD-S3011LA-BW](#) [OPD-D5630LA-BW](#) [OPD-S3010UPG-BW](#) [OPD-Q5621LY-BW](#) [OPD-Q5620G-BW](#) [OPD-S23010LB-BW](#) [OPD-S3912LE-BW](#) [OPD-T5620LR-BW](#) [OPD-S5620LB-BW](#) [OPD-S15013LB-BW](#) [OPD-S3010LR-BW](#)