



**Opto Plus LED Corp.**  
**0.28" SMD Type LED Display**  
**OPS-S2812SB | OPS-S2811SB**

● **EDIT HISTORY**

Version A: Nov. 13, 2020

Preliminary Spec.



# Opto Plus LED Corp.

## 0.28" SMD Type LED Display

### OPS-S2812SB | OPS-S2811SB

#### ● FEATURES

- 0.28 inch (7.00 mm) Digit Height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.28 inch (7.00 mm) height single digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Blue LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

PART NO.	DESCRIPTION
OPS-S2812SB-GW	Common Anode   Gray face   White segment
OPS-S2811SB-GW	Common Cathode   Gray face   White segment
OPS-S2812SB-BW	Common Anode   Black face   White segment
OPS-S2811SB-BW	Common Cathode   Black face   White segment


#### RoHS Compliance



#### Pb Free.



### ● MECHANICAL DIMENSIONS




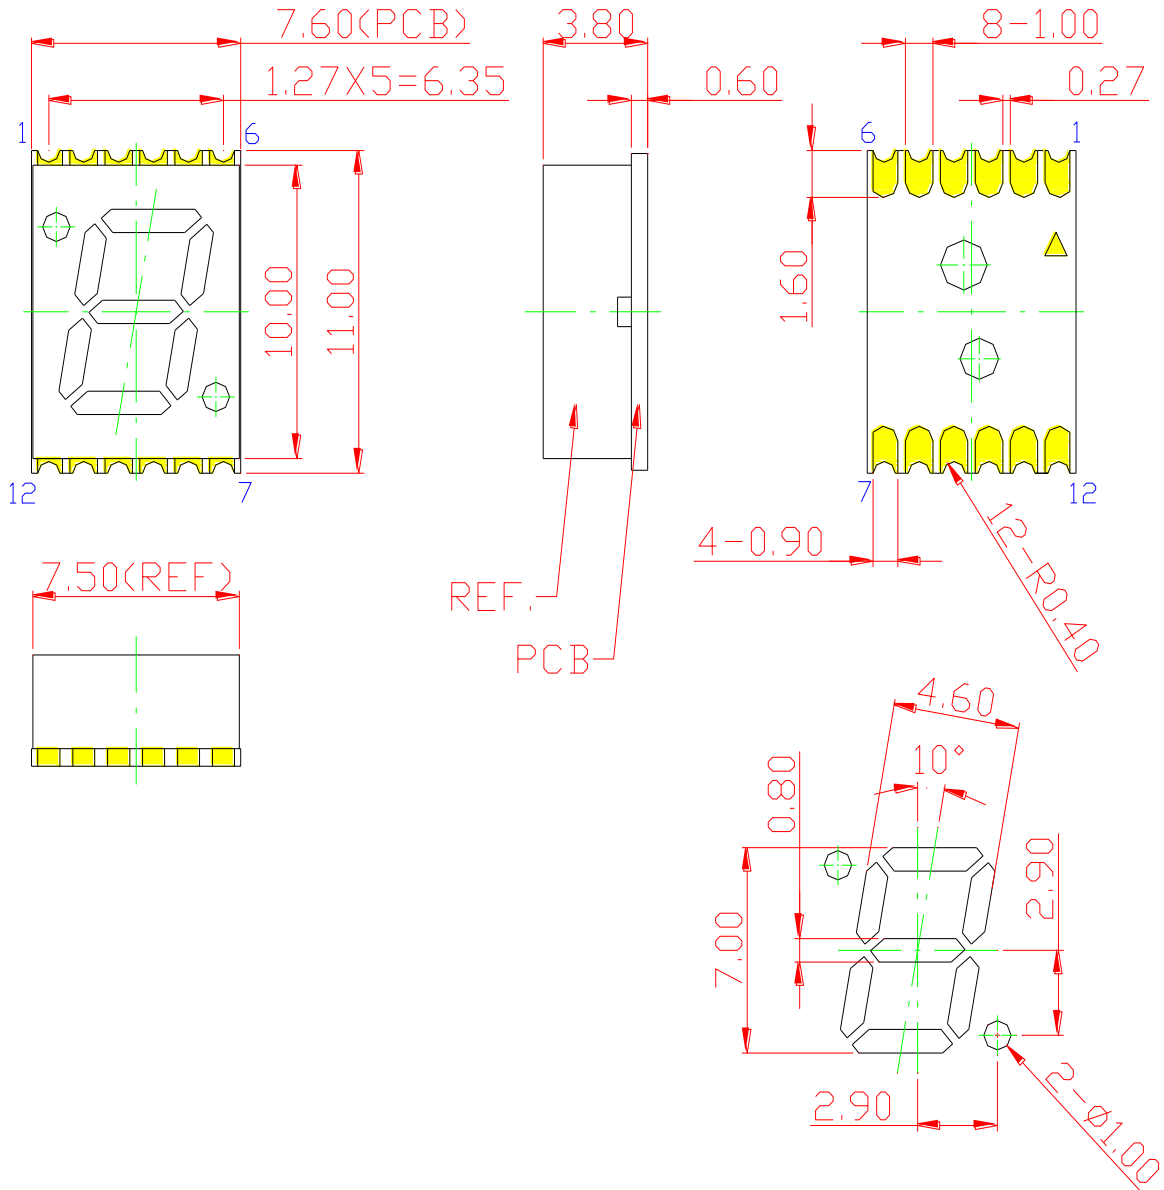


NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.


#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

#### Recommended Soldering Pattern

Turn On Color

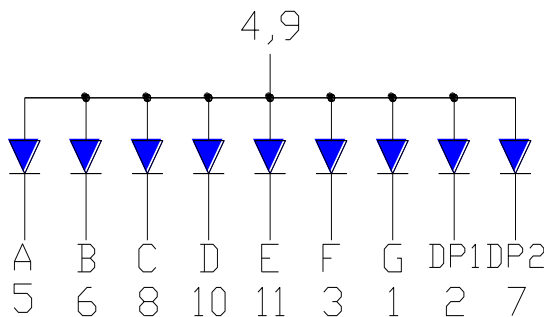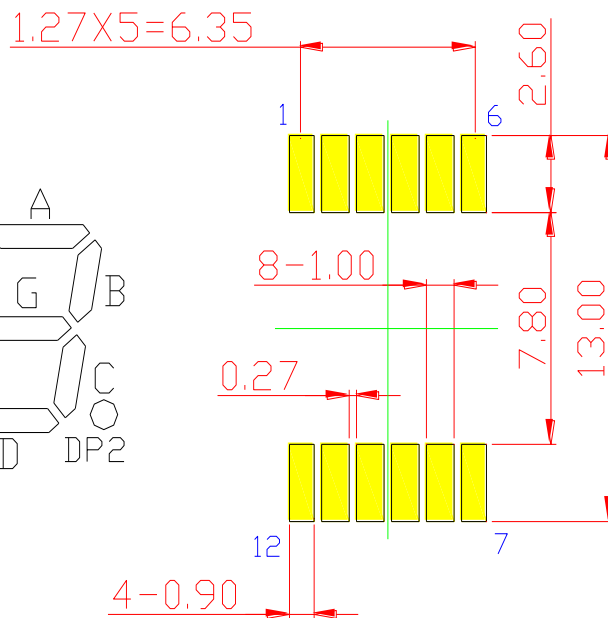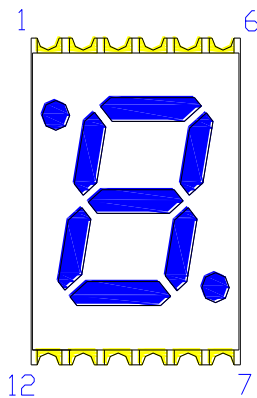

12 PIN No Connect  
OPS-S2812  
(Common Anode)

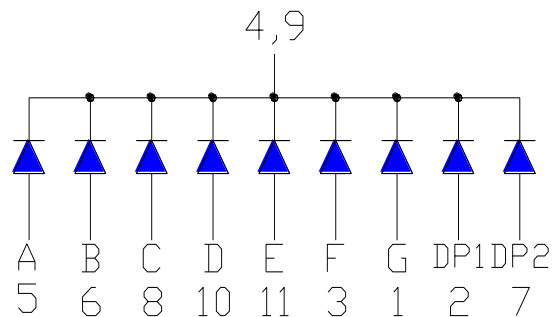

12 PIN No Connect  
OPS-S2811  
(Common Cathode)

※EMITTED COLOR : SUPER BRIGHT BLUE





# Opto Plus LED Corp.

## 0.28" SMD Type LED Display

### OPS-S2812SB | OPS-S2811SB

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

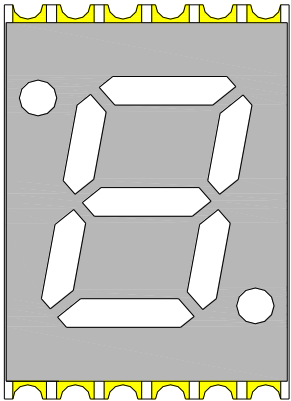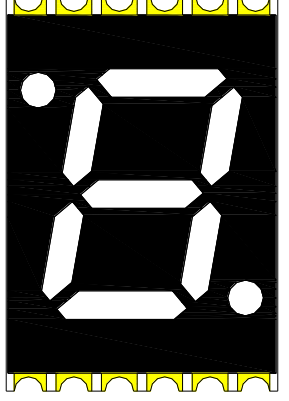-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S2812SB-GW	Common Anode   Gray face   White segment
OPS-S2811SB-GW	Common Cathode   Gray face   White segment
OPS-S2812SB-BW	Common Anode   Black face   White segment
OPS-S2811SB-BW	Common Cathode   Black face   White segment



# Opto Plus LED Corp.

## 0.28" SMD Type LED Display

### OPS-S2812SB | OPS-S2811SB

#### ● SB: SUPER BRIGHT BLUE (InGaN/GaN)

ABSOLUTE MAXIMUM RATING AT  $T_a=25^{\circ}\text{C}$

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_{AD}$	90	mW
Continuous forward current	$I_{AF}$	30	mA
Peak current (duty cycle 1/10, 1kHz)	$I_{PF}$	60	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OPR}$	-40 to +105	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-40 to +105	$^{\circ}\text{C}$

#### ELECTRICAL - OPTICAL CHARACTERISTICS AT $T_a=25^{\circ}\text{C}$

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	$V_F$	$I_F=20\text{mA}$	-	3.0	3.4	V
Reverse Current, (Per Dice)	$I_R$	$V_R=5\text{V}$	-	-	10	$\mu\text{A}$
Dominant Wavelength	$\lambda_D$	$I_F=20\text{mA}$	464	-	474	nm
Luminous Intensity	$I_v$	$I_F=20\text{mA}$	25	38	55	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$	-	20	-	nm



**Opto Plus LED Corp.**  
**0.28” SMD Type LED Display**  
**OPS-S2812SB | OPS-S2811SB**

● **SB: BIN GRADE (Unit : mcd) 20mA**

Super Bright Blue	J	K	L
	25.0 – 33.0	33.1 – 43.0	43.1 – 55.0

● **SB: HUE GRADE ( $\lambda_D$  : nm)**

1	2	3
464.0 - 467.0	467.1 - 470.0	470.1 - 474.0

● **AVAILABLE BIN / HUE TABLE**

J1	J2	J3
K1	K2	K3
L1	L2	L3



# Opto Plus LED Corp.

## 0.28" SMD Type LED Display

### OPS-S2812SB | OPS-S2811SB

#### ● SB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

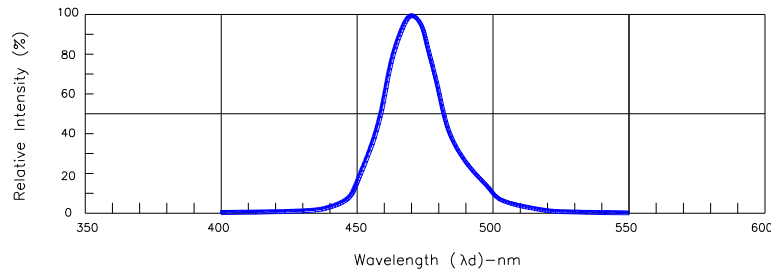


Fig.1-Relative Intensity VS. Wavelength

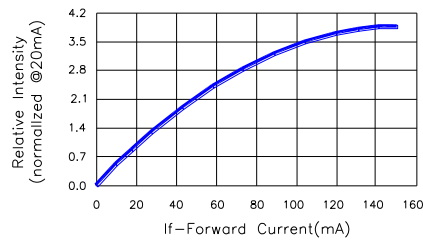


Fig.2-Relative Luminous Intensity vs. Forward Current

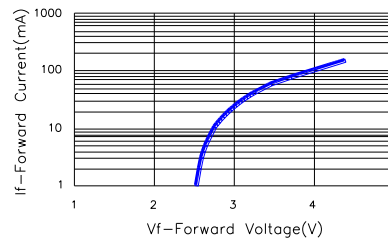


Fig.3-Forward Current vs. Forward Voltage

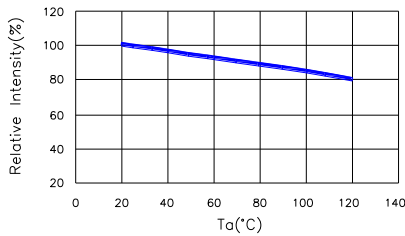


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

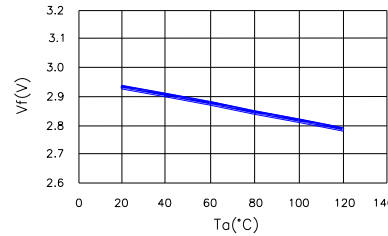


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

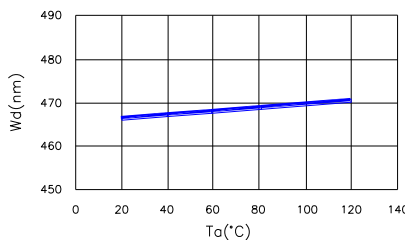


Fig.6-Dominant Wavelength(@20mA)  
VS. Ambient Temperature

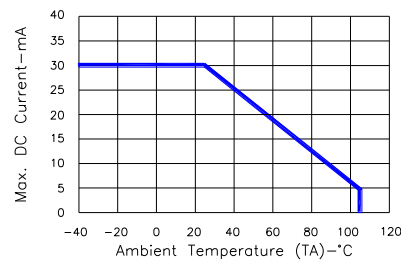



Fig.7-Max. Allowable DC Current  
VS. Ambient Temperature



## ● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

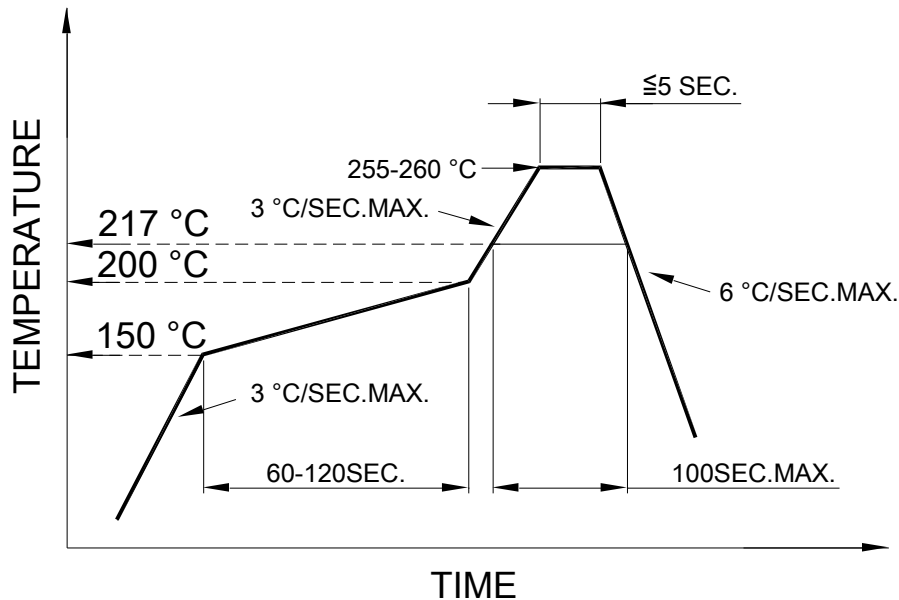

- We recommend the reflow temperature 245°C (+/- 5°C).  
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.


## ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.


## ● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.

### ● REEL DIMENSIONS

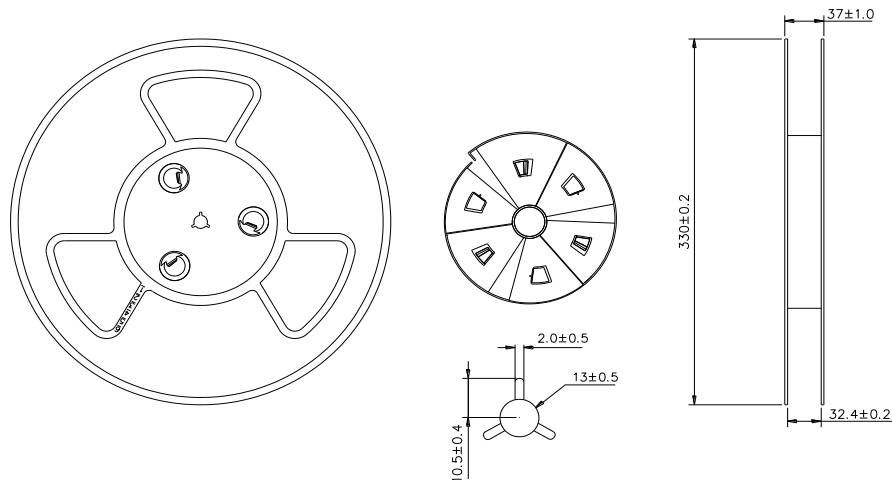

### ● PACKING & LABEL SPECIFICATIONS

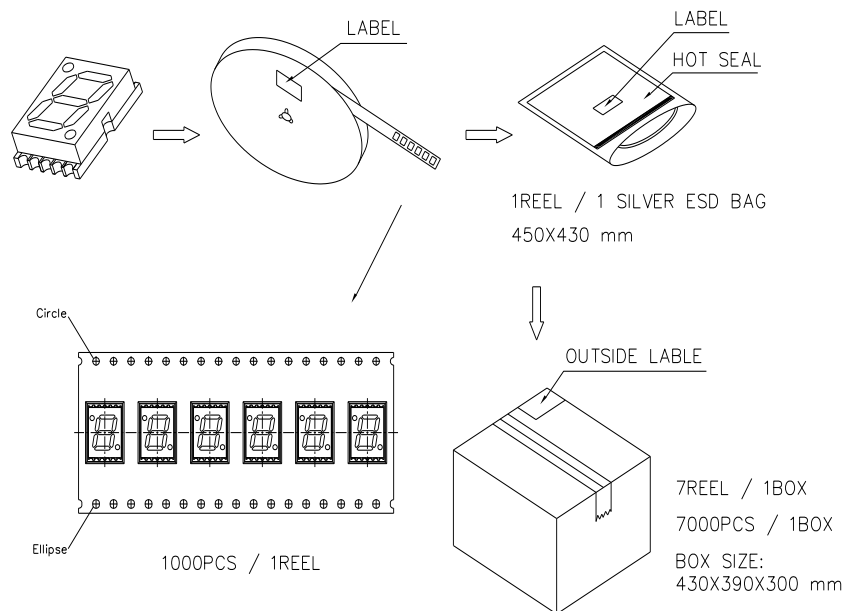

### ● STORAGED CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Opto Plus Led Corp](#) manufacturer:*

Other Similar products are found below :

[OPD-D3010LB-BW](#) [OPD-D3011LE-BW](#) [OPD-D3011LR-BW](#) [OPD-D3910G-BW](#) [OPD-D3910LB-BW](#) [OPD-D3910LE-BW](#) [OPD-D3911LB-BW](#) [OPD-D3911LR-BW](#) [OPD-D5630G-BW](#) [OPD-D5630LA-BW](#) [OPD-D5630LB-BW](#) [OPD-D5630LE-BW](#) [OPD-D5630LR-BW](#) [OPD-D5630SR-BW](#) [OPD-D5630UPG-BW](#) [OPD-D5631LB-BW](#) [OPD-D5631LR-BW](#) [OPD-Q5620G-BW](#) [OPD-Q5620LA-BW](#) [OPD-Q5620LY-BW](#) [OPD-Q5620UPG-BW](#) [OPD-Q5620YG-BW](#) [OPD-Q5621LE-BW](#) [OPD-Q5621LY-BW](#) [OPD-S10020LB-BW](#) [OPD-S10020UPG-BW](#) [OPD-S10021UPG-BW](#) [OPD-S15012LB-BW](#) [OPD-S15012LR-BW](#) [OPD-S15012LY-BW](#) [OPD-S15012UPG-BW](#) [OPD-S15013LB-BW](#) [OPD-S15013LE-BW](#) [OPD-S15013LR-BW](#) [OPD-S15013YG-BW](#) [OPD-S23010LB-BW](#) [OPD-S23010LE-BW](#) [OPD-S23010LR-BW](#) [OPD-S23010UPG-BW](#) [OPD-S23011LE-BW](#) [OPD-S3010LA-BW](#) [OPD-S3010LB-BW](#) [OPD-S3010LE-BW](#) [OPD-S3010LR-BW](#) [OPD-S3010SR-BW](#) [OPD-S3010UPG-BW](#) [OPD-S3011G-BW](#) [OPD-S3011LA-BW](#) [OPD-S3011LB-BW](#) [OPD-S3011LE-BW](#)