


■ **Features**

- High Luminous LEDs
- 4.85mm Diamond Standard Directivity
- UV Resistant Epoxy
- Built-in IC
- Water clear Type

■ **Applications**

- Toys
- Games
- Audio
- Other Lighting

■ **Outline Dimension**

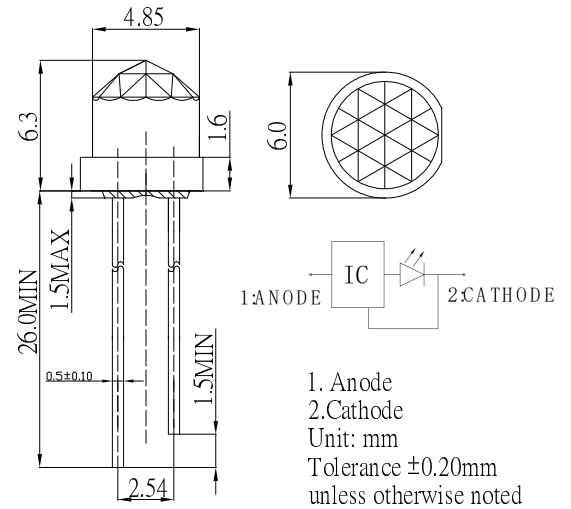


■ **Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value	Unit
		W/M/B/TG /R/Y/YG/O	
Power Supply	Voltage	5	V
Duty Cycle	Duty	1/12	-
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-30~ +85	°C
Lead Soldering Temperature	Tsol	260°C/5sec	-

■ **Directivity**

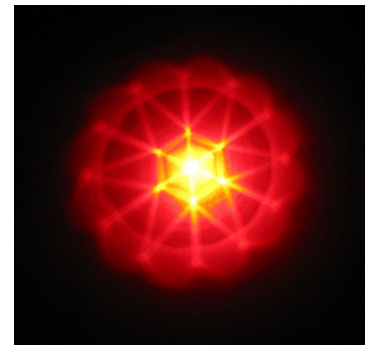

■ **Electrical -Optical Characteristics**

(Ta=25°C)

Part Number	Color		VDD(V)*			Iv(mcd)*			λD(nm)*			Fled (Hz)*	2θ1/2(deg)
			Min	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Typ.
			IF=20mA			IF=20mA							
OSW5DSEDD1A-1.8HZ	White	W	3.0	3.3	5.0	1560	2180	-	X=0.27, Y=0.28(CCT:8000-18000K)			1.8	-
OSM5DSEDD1A-1.8HZ	Warm White	M	3.0	3.3	5.0	1120	1560	-	X=0.45, Y=0.41(CCT:2700-3300K)			1.8	-
OSB5SSEDD1A-1.8HZ	Blue	B	3.0	3.3	5.0	500	750	-	465	470	475	1.8	-
OSG5DSEDD1A-1.8HZ	Pure Green	TG	3.0	3.3	5.0	1560	2180	-	520	525	530	1.8	-
OSG8HSEDD1A-1.8HZ	Yellow Green	G	3.0	3.3	5.0	220	330	-	565	570	575	1.8	-
OSY5RSEDD1A-1.8HZ	Yellow	Y	3.0	3.3	5.0	500	750	-	585	590	595	1.8	-
OSO5JSEDD1A-1.8HZ	Orange	O	3.0	3.3	5.0	500	750	-	600	605	610	1.8	-
OSR5RSEDD1A-1.8HZ	Red	R	3.0	3.3	5.0	500	750	-	620	625	630	1.8	-

*1 Tolerance of measurements of chromaticity coordinates is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

*5 Tolerance of measurements of frequency is ±20%

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optosupply](#) manufacturer:

Other Similar products are found below :

[OSB5SA5111A-CRLED16](#) [OSB5SA83C1A](#) [OSX10201-YGR1](#) [OS5YKP5111A](#) [OS5YPM8131A](#) [OS5YAA5HA4D-1-ST](#) [OS6OGA5B61P](#)
[OSW5DK5A31A-CRLED18](#) [OSY5PA5A31A-1MA](#) [OSO5JA3FE1B-12V](#) [OKLEDT30606A](#) [OSPT9054X3A](#) [OKLEDT5050RPW](#)
[OSL10564-IB](#) [OSO5PA58A1B-12V](#) [OKLEDT8050G5W](#) [OKLEDT8050RPW](#) [OSGGD251A5A](#) [OKLEDT3050RBW](#) [OSYYP251A5A](#)
[OKLEDT5050B5W](#) [OSB5DA3HA1F](#) [OSYBP2A131A](#) [OKLEDT3050RBV](#) [OKLEDT3050WAW](#) [OSL12306-16-IRA](#) [OSY5MP5A34A-](#)
[6.8HZ](#) [OKLEDT5050RBV](#) [OKLEDT8050RBV](#) [OKLEDT3050RPW](#) [OKLEDT5050WAV](#) [OSWRP23962B](#) [OKLEDT5050TAW](#)
[OKLEDT8050G5V](#) [OKLEDT8050WAW](#) [OSY5MSA131A](#) [OSXD2201-AGA](#) [OKLEDT3050RPV](#) [OKLEDT5050RBW](#) [OSL10601-IRA](#)
[OKLEDT8050RPV](#) [OKLEDT8050TAW](#) [OSL10326-LY](#) [OKLEDT5050WAW](#) [OSCM4TS4C1A](#) [OSM5XAHEE1E](#) [OS6OGA3131P](#)
[OSL10564-IYG](#) [OSO5PA56A1A-CRLED14](#) [OSRGH23NE2A](#)