



■ **Features**

- Light up LED without wires
- Built-in chip LED (LxWxT) of 1.6 x0.8 x 0.6mm
- Small size Ø4.8mm x H5.0mm
- No batteries needed
- 

■ **Photo**

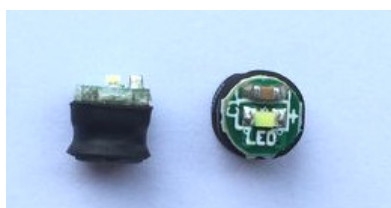

■ **Outline Dimension**

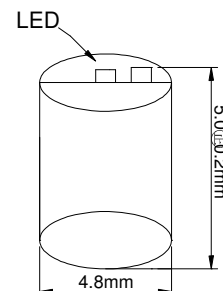


■ **Applications**

- Models
- Toys
- Games & etc.







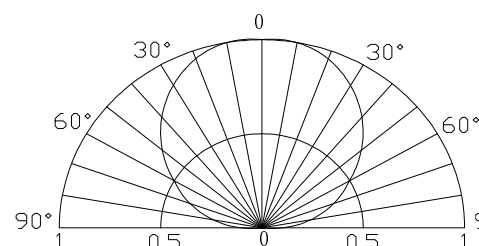


■ **Absolute Maximum Rating (Ta=25°C)**

Item	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	102	mW
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +85	°C

■ **Directivity**



■ **Electrical -Optical Characteristics (Ta=25°C)**

Part Number	Color			I <sub>v</sub> (mcd)			λD(nm)			2θ1/2(deg)
				Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I <sub>F</sub> =20mA						
OSWM43-M5W	Warm White	M5		-	500	-	-	CCT:3000K	-	120
OSWM43-W5W	White	W5		-	550	-	-	CCT:10000K	-	120
OSWM43-B5W	Blue	B5		-	100	-	-	470	-	120
OSWM43-G5W	True Green	G5		-	600	-	-	525	-	120
OSWM43-Y5W	Yellow	Y5		-	120	-	-	590	-	120
OSWM43-R5W	Red	R5		-	120	-	-	625	-	120
# OSWM43-K4W	Pink	K4		-	150	-	-	X=0.31, Y=0.20	-	120
# OSWM43-VXW	Violet	VX		-	250	-	-	X=0.20, Y=0.09	-	120
# OSWM43-B6W	Ice Blue	B6		-	300	-	-	X=0.18 Y=0.26	-	120

\*1 Tolerance of measurements of chromaticity coordinate is ±10%

\*2 Tolerance of measurements of dominant wavelength is ±1nm

\*3 Tolerance of measurements of luminous intensity is ±15%

# New colors launched on April, 2020

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Bars and Arrays](#) category:*

*Click to view products by [Optosupply](#) manufacturer:*

Other Similar products are found below :

[LTL-2755Y](#) [LF2B-D3P-BTHWW2-1M](#) [SSA-LXB10GW-18751](#) [SSA-LXB10YW](#) [SSA-LXH1025I1G7XXD](#) [HLMP2300](#) [LTL-2450Y](#) [LTL-2855G](#) [HLMP2655](#) [SSB-LX2301SIW](#) [TOS-4102BR-N](#) [SSA-LXB10-IYG8W-1](#) [LPB-R0112051S](#) [SSA-LXB525-I1G3I1D](#) [MW-MLD-2835-3W-LENS V,2](#) [MW-MLD-2835-1W-LENS](#) [OSWSW51006B-5V](#) [MW-MLD-2835-3B-LENS](#) [OSWM43-K4W](#) [OSWM43-G5W](#) [MW-MLD-2835-2W-LENS V,2](#) [OSWSM51006B-5V](#) [OST1MC5A31A-W1V](#) [WL 30 W](#) [MW-MLD-HE-3W-LENS170](#) [WL 20 W](#) [OSWM43-W5W](#) [57844](#) [113162000-00660681](#) [49983](#) [MW-MLD-HE-1WW-LENS170](#) [OSWM43-B6W](#) [MW-MLD-HE-2W-LENS170](#) [OSWM43-B5W](#) [OSWM43-Y5W](#) [MINIOVAL-1WW](#) [ALUSTAR-G2-NA-SC590-1A-54](#) [TOWER 5 CONNECT](#) [SCANGRIP TRIPOD 2 M](#) [WÜRTH CONNECTOR](#) [RIDGID CONNECTOR](#) [BOSCH GREEN CONNECTOR](#) [SCANGRIP TRIPOD](#) [POWER SUPPLY CONNECT](#) [DEWALT CONNECTOR](#) [SUPERFORM](#) [INGERSOLL CONNECTOR](#) [EINHELL CONNECTOR](#) [MAGNET BRACKET](#) [MAKITA CONNECTOR](#)