


■Features

- High Luminous AC LEDs
- 5mm Round Standard Directivity
- Long Lifetime Operation
- UV Resistant Epoxy/ White Diffused Type
- Bi-polar Type

■Applications

- Toys
- Audio
- Indications
- General Use

■Outline Dimension

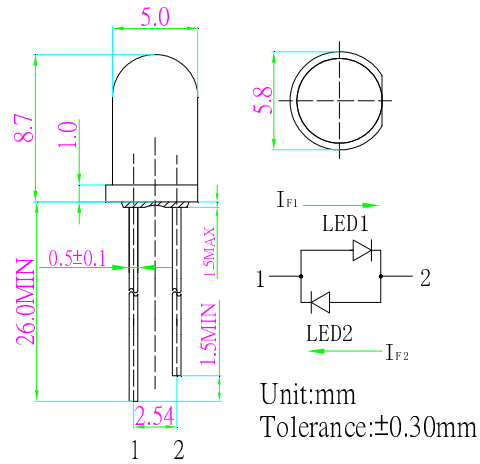


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG	YG/Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

■Directivity

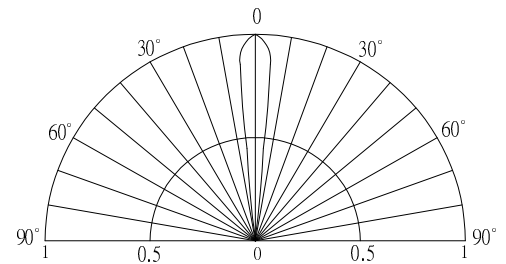

#Pulse width Max.10ms Duty ratio max 1/10

Part Number	Color	Symbol	V _F (V)*			I _R (μA) Max.	I _v (mcd)*			λD(nm)*			θ1/2(deg) Typ.
			Min.	Typ.	Max.		Min.	Typ.	Max.	Min.	Typ.	Max.	
			I _F =20mA				V _R =5V	I _F =20mA					
OSWWD25112A	Cool White	W	2.8	3.1	3.6	10		5800	7000	-	*CCT: 8000-18000K		
OSMMD25112A	Warm White	M	2.8	3.1	3.6	10	4200	5800	-	*CCT:2700-3200K			15
OSBBS25112A	Blue	B	2.8	3.1	3.6	10	2180	3000	-	465	465	475	15
OSGGD25112A	Pure Green	PG	2.8	3.1	3.6	10	5800	7000	-	520	525	530	15
OSGGH25112A	Yellow Green	YG	1.8	2.1	2.6	10	750	1120	-	565	570	575	15
OSYYJ25112A	Yellow	Y	1.8	2.1	2.6	10	1560	2180	-	585	590	595	15
OSOOJ25112A	Orange	O	1.8	2.1	2.6	10	1560	2180	-	600	605	610	15
OSRRJ25112A	Red	R	1.8	2.1	2.6	10	1560	2180	-	620	625	630	15

*1 Tolerance of measurements of forward voltage is±0.1V

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of color temperature is +10%

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optosupply](#) manufacturer:

Other Similar products are found below :

[OECCDD01-300](#) [OEHW2030GF](#) [OEHW2045GF](#) [OEHW2060GF](#) [OEHW2090GF](#) [OKLEDT02406A](#) [OKLEDT3050G5V](#)
[OKLEDT3050RBV](#) [OKLEDT3050RBW](#) [OKLEDT3050RPV](#) [OKLEDT3050RPW](#) [OKLEDT3050WAW](#) [OKLEDT30606A](#) [OKLEDT31005A](#)
[OKLEDT3100B5](#) [OKLEDT3100G8](#) [OKLEDT3100M3](#) [OKLEDT3100M4](#) [OKLEDT3100R6](#) [OKLEDT3100W6](#) [OKLEDT3100WA](#)
[OKLEDT3100Y5](#) [OKLEDT31203A](#) [OKLEDT31206A](#) [OKLEDT5050B5W](#) [OKLEDT5050G5W](#) [OKLEDT5050RBV](#) [OKLEDT5050RBW](#)
[OKLEDT5050RPW](#) [OKLEDT5050TAV](#) [OKLEDT5050TAW](#) [OKLEDT5050W6P](#) [OKLEDT5050WAV](#) [OKLEDT5050WAW](#)
[OKLEDT50606A](#) [OKLEDT50606B](#) [OKLEDT51005A](#) [OKLEDT5100B5](#) [OKLEDT5100G8](#) [OKLEDT5100M3](#) [OKLEDT5100M4](#)
[OKLEDT5100R6](#) [OKLEDT5100W6](#) [OKLEDT5100WA](#) [OKLEDT5100Y5](#) [OKLEDT51203A](#) [OKLEDT51206A](#) [OKLEDT8050G5V](#)
[OKLEDT8050G5W](#) [OKLEDT8050M3V](#)