

## General Description

The GreenMOS<sup>®</sup> high voltage MOSFET utilizes charge balance technology to achieve outstanding low on-resistance and lower gate charge. It is engineered to minimize conduction loss, provide superior switching performance and robust avalanche capability.

The GreenMOS<sup>®</sup> Generic series is optimized for extreme switching performance to minimize switching loss. It is tailored for high power density applications to meet the highest efficiency standards.

## Features

- Low  $R_{DS(ON)}$  & FOM
- Extremely low switching loss
- Excellent stability and uniformity




## Applications

- PC power
- LED lighting
- Telecom power
- Server power
- EV Charger
- Solar/UPS


## Key Performance Parameters

| Parameter                      | Value | Unit       |
|--------------------------------|-------|------------|
| $V_{DS, min} @ T_{j(max)}$     | 700   | V          |
| $I_{D, pulse}$                 | 13.5  | A          |
| $R_{DS(ON), max} @ V_{GS}=10V$ | 900   | m $\Omega$ |
| $Q_g$                          | 7.1   | nC         |

## Marking Information

| Product Name | Package | Marking     |
|--------------|---------|-------------|
| OSG65R900DTF | TO252   | OSG65R900DT |

## Package & Pin Information



**Absolute Maximum Ratings** at  $T_j=25^{\circ}\text{C}$  unless otherwise noted

| Parameter   | Symbol         | Value      | Unit               |
|---|----------------|------------|--------------------|
| Drain-source voltage  | $V_{DS}$       | 650        | V                  |
| Gate-source voltage   | $V_{GS}$       | $\pm 30$   | V                  |
| Continuous drain current <sup>1)</sup> , $T_C=25^{\circ}\text{C}$         | $I_D$          | 4.5        | A                  |
| Continuous drain current <sup>1)</sup> , $T_C=100^{\circ}\text{C}$        |                | 2.8        |                    |
| Pulsed drain current <sup>2)</sup> , $T_C=25^{\circ}\text{C}$             | $I_{D, pulse}$ | 13.5       | A                  |
| Continuous diode forward current <sup>1)</sup> , $T_C=25^{\circ}\text{C}$ | $I_S$          | 4.5        | A                  |
| Diode pulsed current <sup>2)</sup> , $T_C=25^{\circ}\text{C}$             | $I_{S, pulse}$ | 13.5       | A                  |
| Power dissipation <sup>3)</sup> , $T_C=25^{\circ}\text{C}$                | $P_D$          | 32         | W                  |
| Single pulsed avalanche energy <sup>5)</sup>                              | $E_{AS}$       | 50         | mJ                 |
| MOSFET dv/dt ruggedness, $V_{DS}=0\dots 480\text{ V}$                     | dv/dt          | 50         | V/ns               |
| Reverse diode dv/dt, $V_{DS}=0\dots 480\text{ V}$ , $I_{SD}\leq I_D$      | dv/dt          | 15         | V/ns               |
| Operation and storage temperature   | $T_{stg}, T_j$ | -55 to 150 | $^{\circ}\text{C}$ |

**Thermal Characteristics**

| Parameter  | Symbol          | Value | Unit                 |
|--|-----------------|-------|----------------------|
| Thermal resistance, junction-case                  | $R_{\theta JC}$ | 3.9   | $^{\circ}\text{C/W}$ |
| Thermal resistance, junction-ambient <sup>4)</sup> | $R_{\theta JA}$ | 62    | $^{\circ}\text{C/W}$ |

**Electrical Characteristics** at  $T_j=25^{\circ}\text{C}$  unless otherwise specified

| Parameter                        | Symbol       | Min. | Typ. | Max. | Unit          | Test condition  |
|----------------------------------|--------------|------|------|------|---------------|---|
| Drain-source breakdown voltage   | $BV_{DSS}$   | 650  |      |      | V             | $V_{GS}=0\text{ V}$ , $I_D=250\ \mu\text{A}$                                |
|                                  |              | 700  |      |      |               | $V_{GS}=0\text{ V}$ , $I_D=250\ \mu\text{A}$ ,<br>$T_j=150^{\circ}\text{C}$ |
| Gate threshold voltage           | $V_{GS(th)}$ | 2.9  |      | 3.9  | V             | $V_{DS}=V_{GS}$ , $I_D=250\ \mu\text{A}$                                    |
| Drain-source on-state resistance | $R_{DS(on)}$ |      | 0.75 | 0.9  | $\Omega$      | $V_{GS}=10\text{ V}$ , $I_D=2\text{ A}$                                     |
|                                  |              |      | 1.75 |      |               | $V_{GS}=10\text{ V}$ , $I_D=2\text{ A}$ ,<br>$T_j=150^{\circ}\text{C}$      |
| Gate-source leakage current      | $I_{GSS}$    |      |      | 100  | nA            | $V_{GS}=30\text{ V}$  |
|                                  |              |      |      | -100 |               | $V_{GS}=-30\text{ V}$   |
| Drain-source leakage current     | $I_{DSS}$    |      |      | 1    | $\mu\text{A}$ | $V_{DS}=650\text{ V}$ , $V_{GS}=0\text{ V}$                                 |

### Dynamic Characteristics

| Parameter                    | Symbol       | Min. | Typ.  | Max. | Unit | Test condition   |
|------------------------------|--------------|------|-------|------|------|--|
| Input capacitance            | $C_{iss}$    |      | 324.1 |      | pF   | $V_{GS}=0\text{ V}$ ,<br>$V_{DS}=50\text{ V}$ ,<br>$f=100\text{ kHz}$                      |
| Output capacitance           | $C_{oss}$    |      | 30.1  |      | pF   |  |
| Reverse transfer capacitance | $C_{rss}$    |      | 1.6   |      | pF   |  |
| Turn-on delay time           | $t_{d(on)}$  |      | 22.8  |      | ns   | $V_{GS}=10\text{ V}$ ,<br>$V_{DS}=400\text{ V}$ ,<br>$R_G=2\ \Omega$ ,<br>$I_D=2\text{ A}$ |
| Rise time                    | $t_r$        |      | 11.5  |      | ns   |  |
| Turn-off delay time          | $t_{d(off)}$ |      | 48.7  |      | ns   |  |
| Fall time                    | $t_f$        |      | 14.9  |      | ns   |  |

### Gate Charge Characteristics

| Parameter            | Symbol        | Min. | Typ. | Max. | Unit | Test condition  |
|----------------------|---------------|------|------|------|------|---|
| Total gate charge    | $Q_g$         |      | 7.1  |      | nC   | $V_{GS}=10\text{ V}$ ,<br>$V_{DS}=400\text{ V}$ ,<br>$I_D=2\text{ A}$ |
| Gate-source charge   | $Q_{gs}$      |      | 1.5  |      | nC   |   |
| Gate-drain charge    | $Q_{gd}$      |      | 3.5  |      | nC   |   |
| Gate plateau voltage | $V_{plateau}$ |      | 5.8  |      | V    |   |







### Body Diode Characteristics







| Parameter                     | Symbol    | Min. | Typ. | Max. | Unit          | Test condition   |
|-------------------------------|-----------|------|------|------|---------------|--|
| Diode forward voltage         | $V_{SD}$  |      |      | 1.3  | V             | $I_S=4.5\text{ A}$ ,<br>$V_{GS}=0\text{ V}$                                    |
| Reverse recovery time         | $t_{rr}$  |      | 147  |      | ns            | $V_R=400\text{ V}$ ,<br>$I_S=2\text{ A}$ ,<br>$di/dt=100\text{ A}/\mu\text{s}$ |
| Reverse recovery charge       | $Q_{rr}$  |      | 0.92 |      | $\mu\text{C}$ |  |
| Peak reverse recovery current | $I_{rrm}$ |      | 12.4 |      | A             |  |

### Note


- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3)  $P_d$  is based on max. junction temperature, using junction-case thermal resistance.
- 4) The value of  $R_{\theta JA}$  is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with  $T_a=25\text{ }^\circ\text{C}$ .
- 5)  $V_{DD}=100\text{ V}$ ,  $V_{GS}=10\text{ V}$ ,  $L=60\text{ mH}$ , starting  $T_j=25\text{ }^\circ\text{C}$ .

**Electrical Characteristics Diagrams**

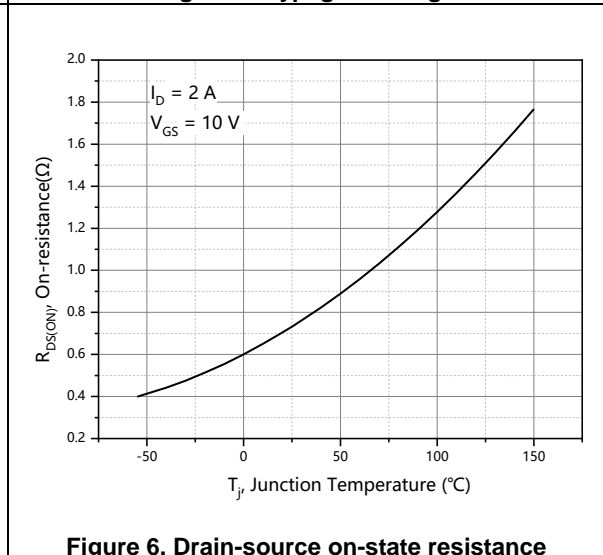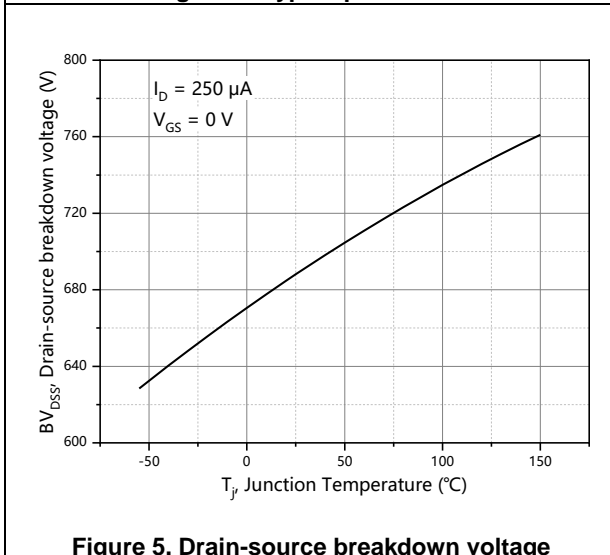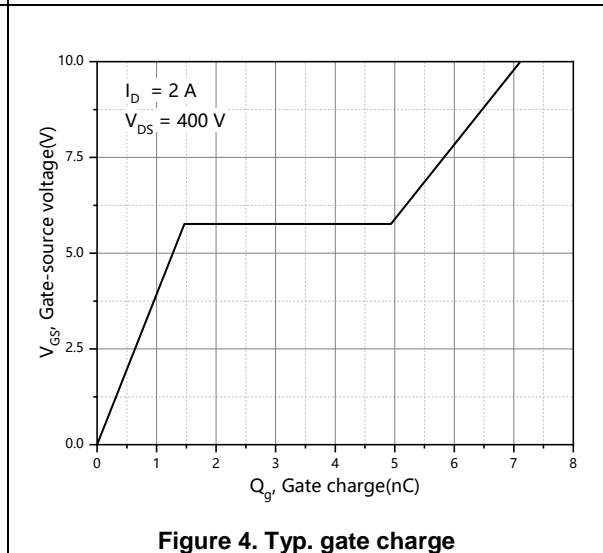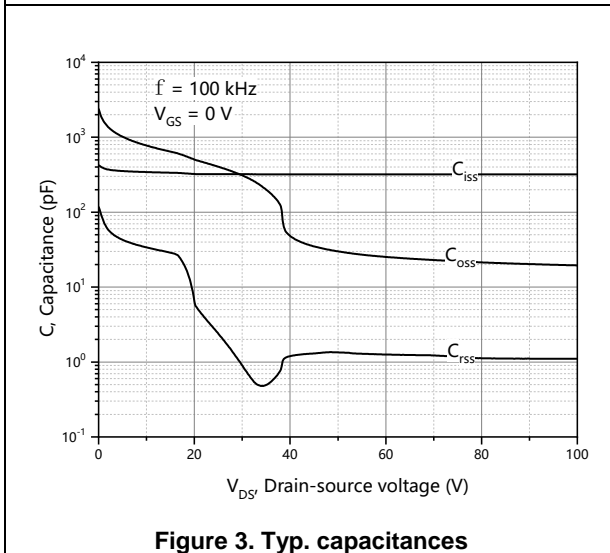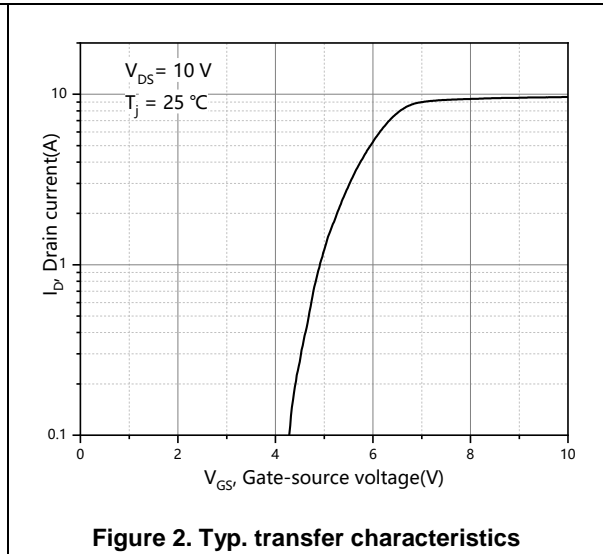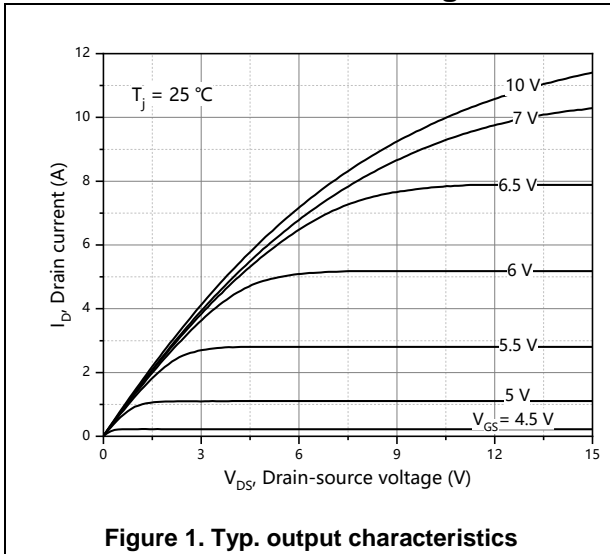


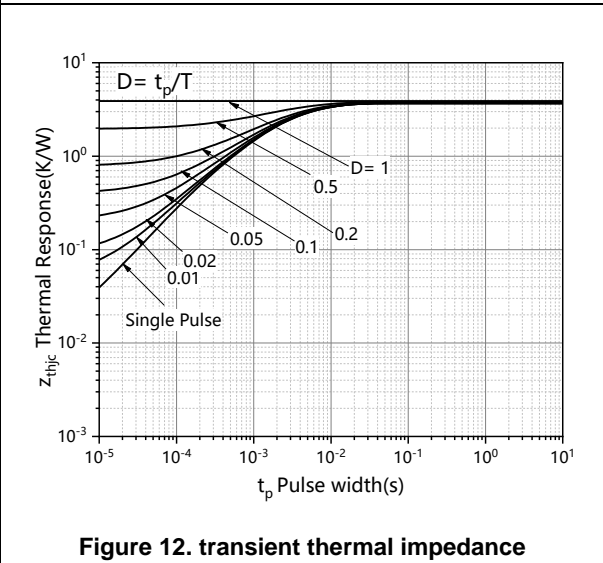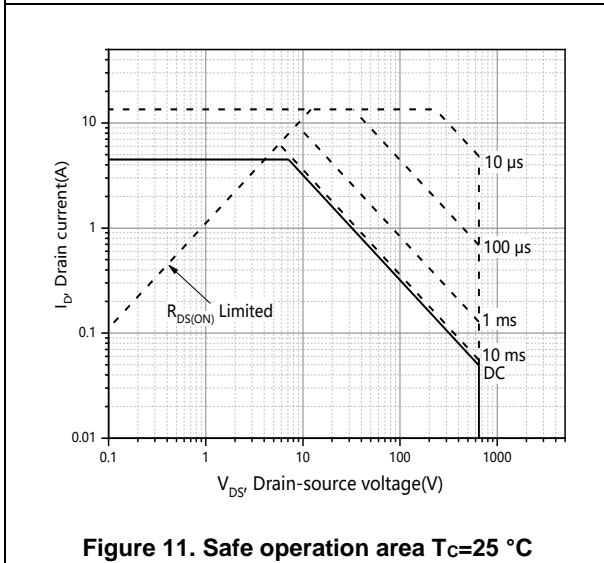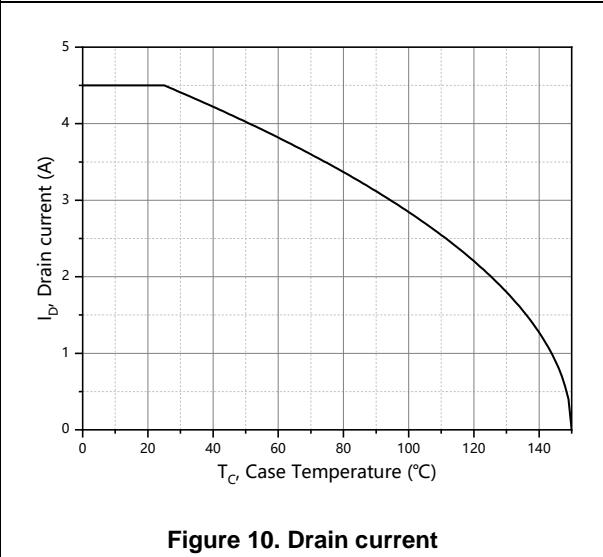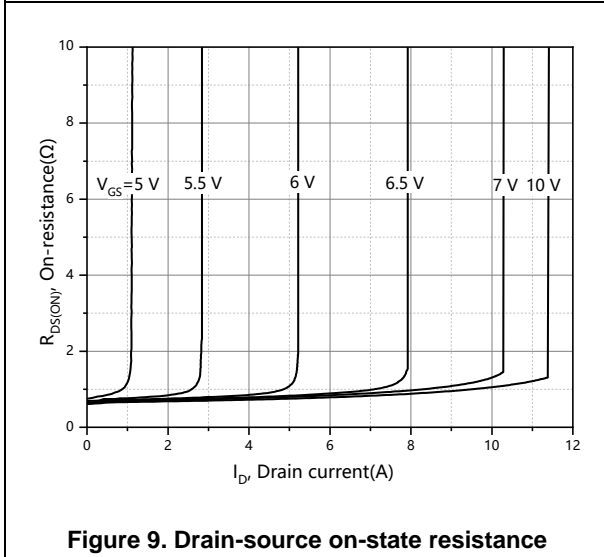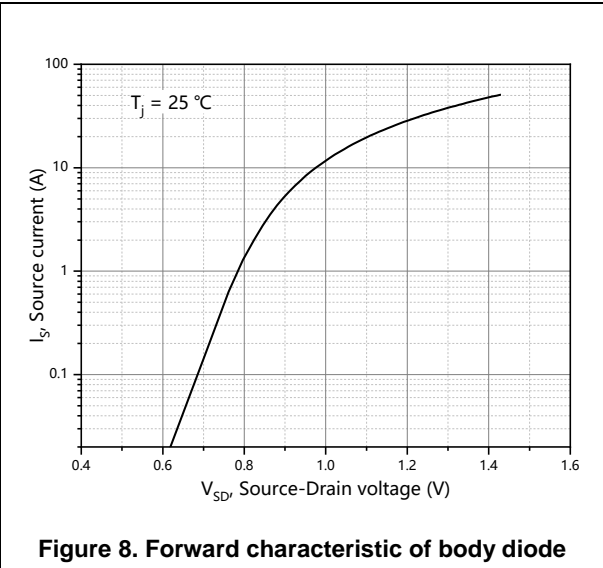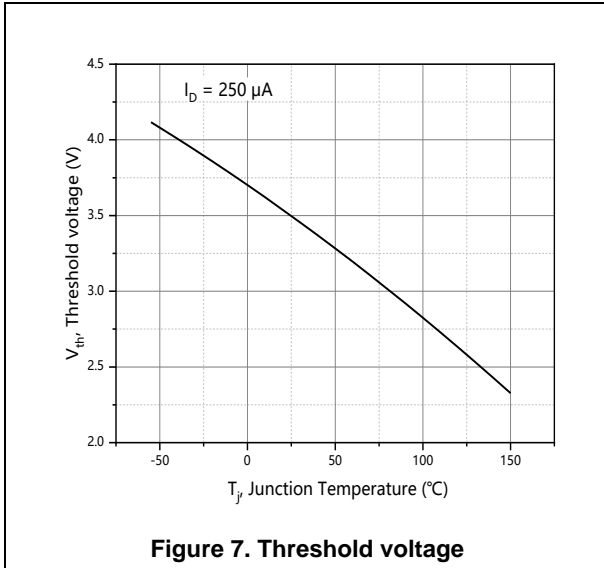


**Test circuits and waveforms**

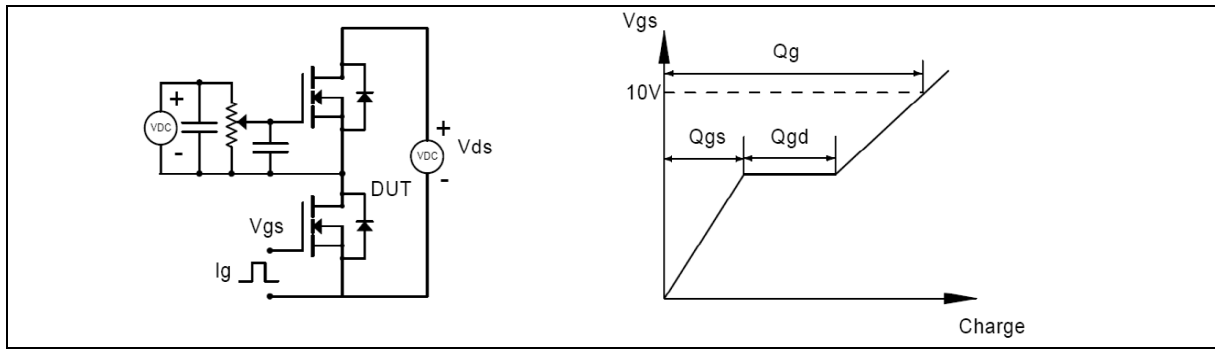


**Figure 1. Gate charge test circuit & waveform**

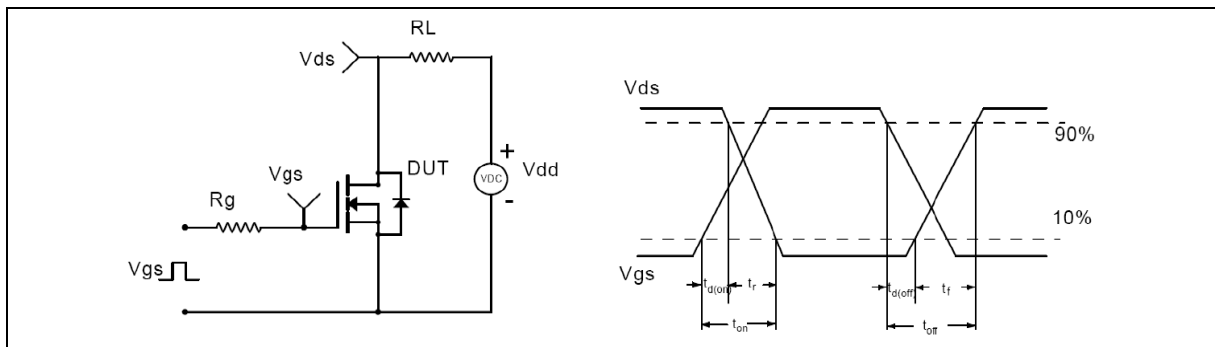

**Figure 2. Switching time test circuit & waveforms**

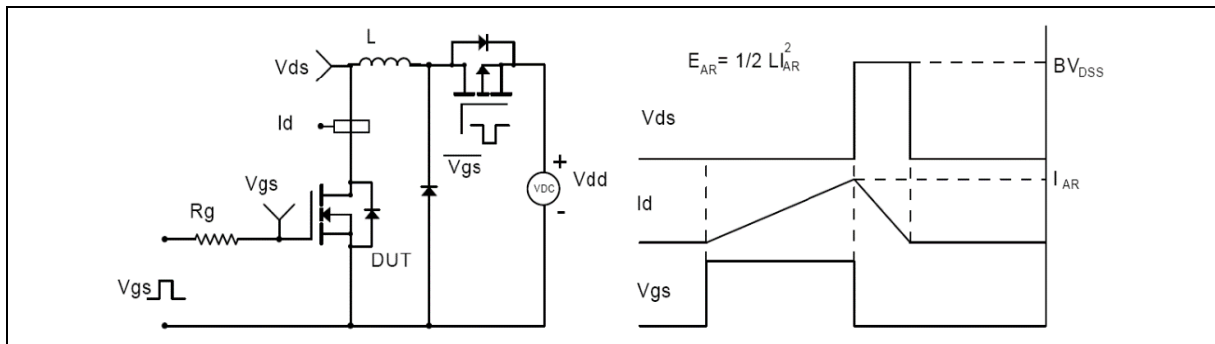


**Figure 3. Unclamped inductive switching (UIS) test circuit & waveforms**

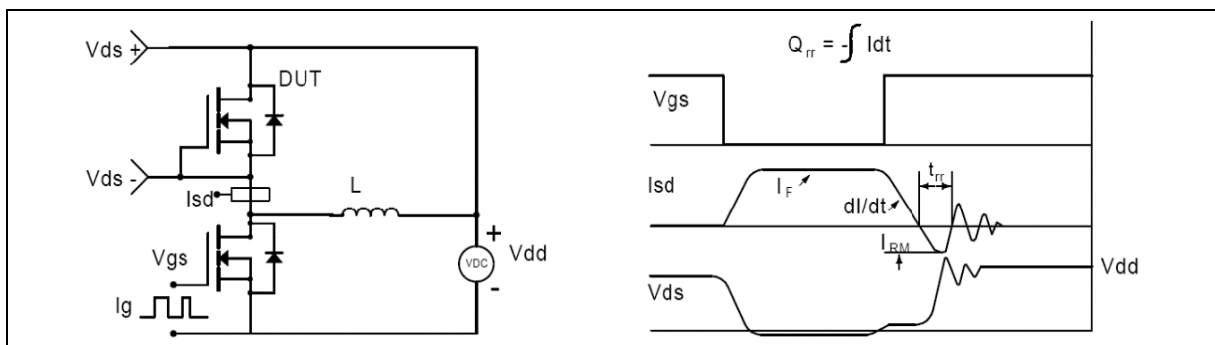

**Figure 4. Diode reverse recovery test circuit & waveforms**

**Package Information**

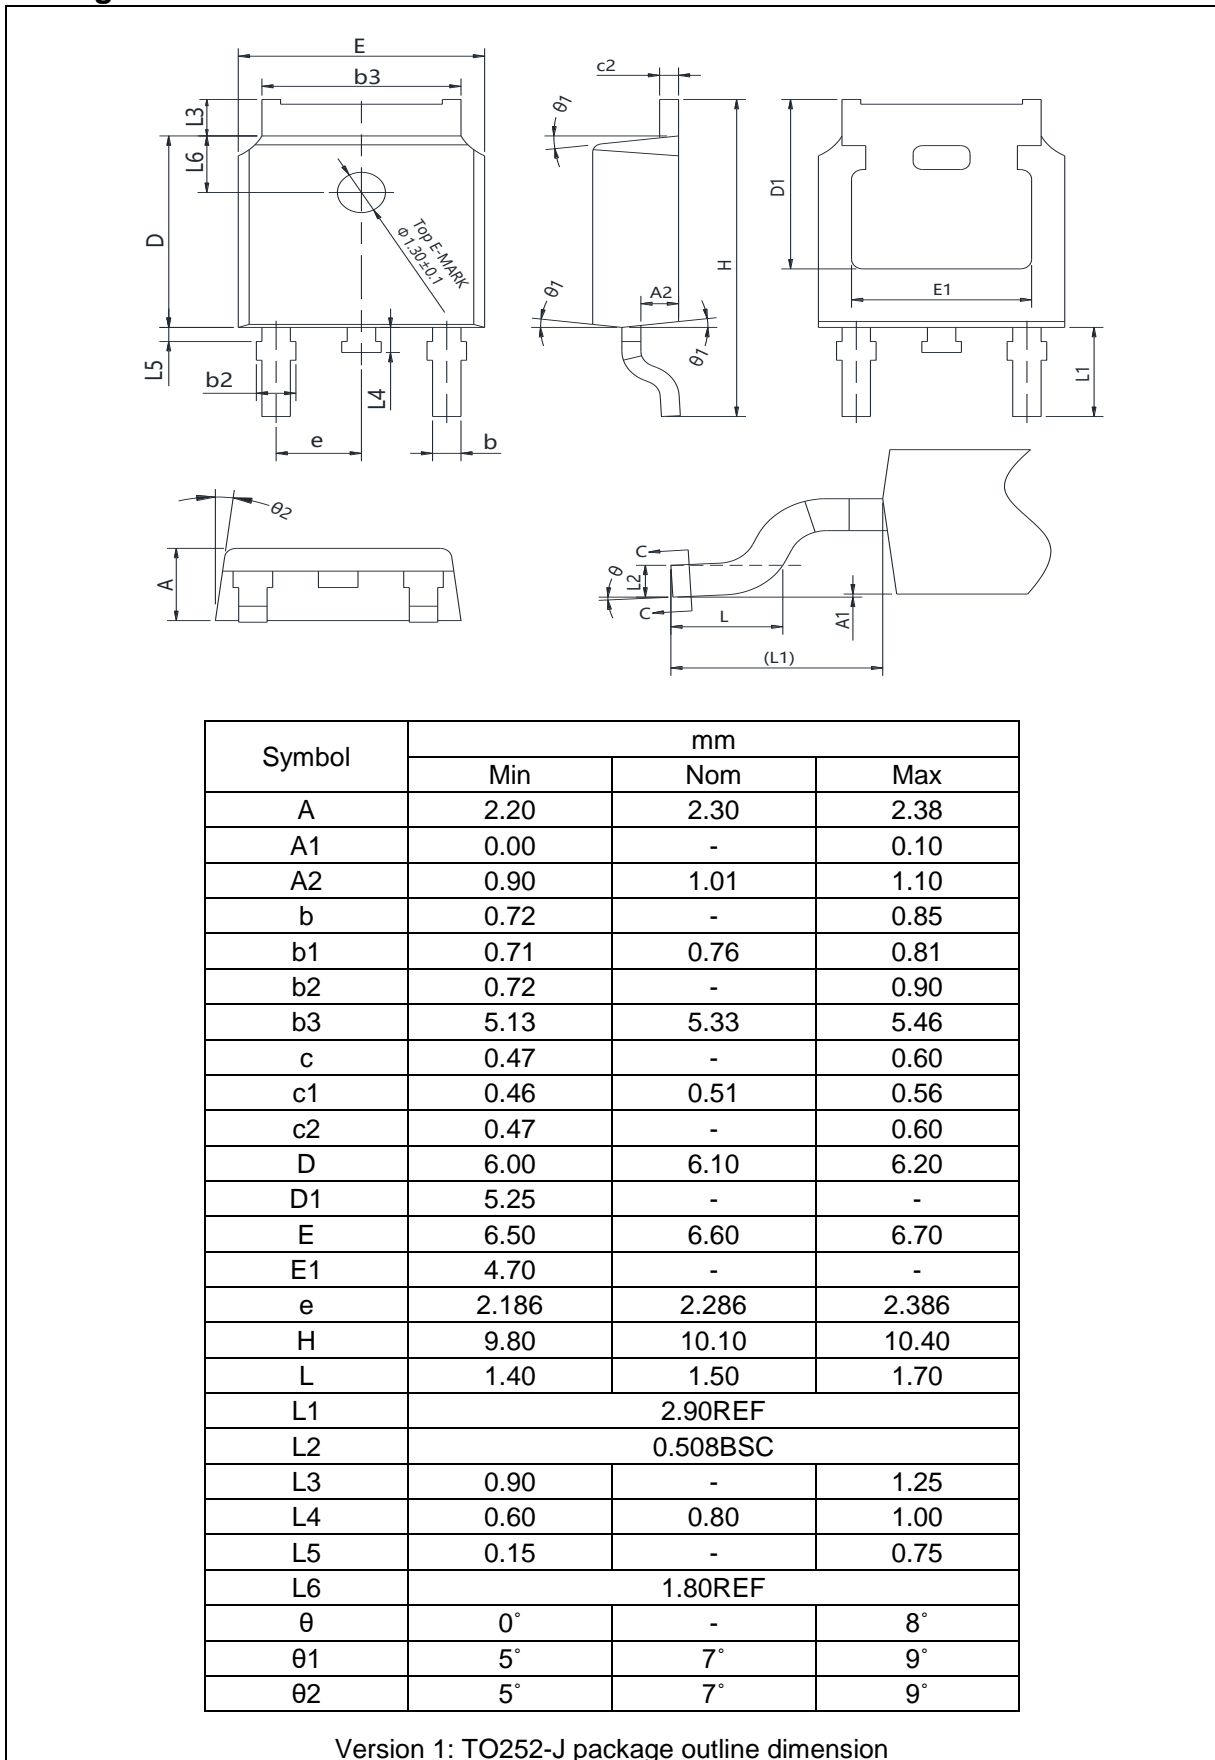

### Ordering Information

| Package Type | Units/ Reel | Reels/ Inner Box | Units/ Inner Box | Inner Boxes/ Carton Box | Units/ Carton Box |
|--------------|-------------|------------------|------------------|-------------------------|-------------------|
| TO252-J      | 2500        | 2                | 5000             | 5                       | 25000             |

### Product Information

| Product      | Package | Pb Free | RoHS | Halogen Free |
|--------------|---------|---------|------|--------------|
| OSG65R900DTF | TO252   | yes     | yes  | yes          |

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved /



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Oriental Semiconductor](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)