

IES-150B



IES-150B

► Industrial 5-port mini type Unmanaged Ethernet Switch with 5x10/100Base-T(X)

Features

- Support 5 ports 10/100 Base-T(X)
- Support auto-negotiation and auto-MDI/MID-X
- Support Store and forward transmission
- Support flow control
- Compact size for easily installation
- Rigid IP-30 housing design
- DIN-rail and wall mounting enable




Introduction

IES-150B is unmanaged Ethernet Switch with 5x10/100Base-T(X) ports and extended operating temperature range from -40°C to 75°C for the harsh environments. The enclosure designed with compact size and a robust housing; it can help you to easily installed.

Dimensions

Unit =mm (Tolerance ±0.5mm)

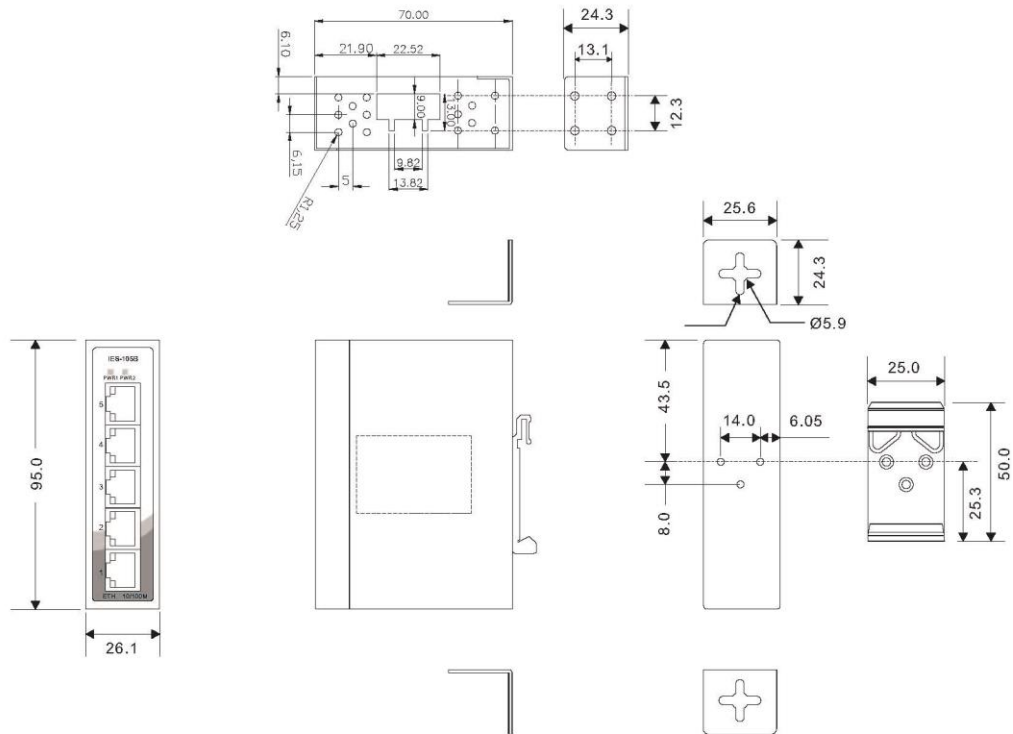

Specifications

ORing Switch Model	IES-150B
Physical Ports	
10/100Base-T(X) Ports in RJ45 Auto MDI/MDIX	5
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control
MAC Table	1K
Packet buffer	448Kbits
Processing	Store-and-Forward
Switch Properties	Switching latency: 7 us Switching bandwidth: 1Gbps Throughput (packet per second) : 0.744Mpps@64Bytes packet
LED indicators	
Power Indicator (PWR)	Green: Power LED x 2
10/100Base-T(X) RJ45 Port Indicator	Green for Link/Act indicator. Lower LED for speed indicator: Amber for 100Mbps, Off-light for 10Mbps
Power	
Redundant Input power	Dual 12~48VDC and 24VAC on 4-pin terminal block

Power consumption (Typ.)	<3Watts, 12-48VDC: 0.10A-0.04A, 24VAC (50/60Hz) 0.10A
Overload current protection	Present
Reverse Polarity Protection	Present
Physical Characteristic	
Enclosure	IP-30 Metal
Dimension (W x D x H)	26.1 (W) x 70 (D) x 95 (H)mm 1.027 (W) x 2.755 (D) x 3.74 (H) inch
Weight (g)	205 g
Hardware Version	V3.0
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory approvals	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD: Contact 4KV, Air 8KV), IEC/EN 61000-4-3 (RS: 3V), IEC/EN 61000-4-4 (EFT Power 0.5KV, Signal 0.5KV), IEC/EN 61000-4-5 (Surge: Power 0.5KV, Signal 1KV), IEC/EN 61000-4-6 (CS: 3V), IEC/EN 61000-4-8 (PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	IEC 60950-1, UL 60950-1, EN 60950-1 (LVD), UL61010-1, UL61010-2-201
Others	E-MARK
MTBF	2638236hrs
Warranty	5 years

Ordering Information

IES-1 **A** **B**



Code Definition	10/100Base-T(X) Port Number	Additional Port Number
Option	-5: 5 ports	-0: 0 port
Available Model	Model Name	Description
	IES-150B	Industrial 5-port mini type unmanaged Ethernet switch with 5x10/100Base-T(X)
Packing List		Optional Accessories
<ul style="list-style-type: none"> IES-150B x 1 DIN-Rail Kit x 1 Wall-mount Kit x 2 Quick Installation Guide x 1 		<ul style="list-style-type: none"> DR/SDR/DRP Series DIN-Rail power supply PAE-121000, 12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, EU plug. PAA-121000, 12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, US plug.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [ORing](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)