



# IES-180B

## Industrial 8-port mini type unmanaged Ethernet switch with 8x10/100Base-T(X)

### Features

- Supports 8 ports 10/100 Base-T(X)
- Supports auto-negotiation and auto-MDI/MDI-X
- Supports store and forward transmission
- Supports flow control
- Compact size for easily installation
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled



### Introduction

IES-180B is unmanaged Ethernet switch with 8x10/100Base-T(X) ports. With very compact size of housing, you can install IES-180B easily. In addition, IES-180B is with rigid IP-30 housing design and can operate under harsh environment. The extended operating temperature range from -40 °C to 75°C is ready and can satisfy most requirement of operation.

### Practical Operation


IES-180B can be used in connecting several Ethernet devices like Ethernet I/O, IP-Camera or other Ethernet switches. In addition, its mini size enables easily installation and minimize space requirement.



Connections of Ethernet devices

**Dimension**

Unit = mm (Tolerance  $\pm 0.5$ mm)

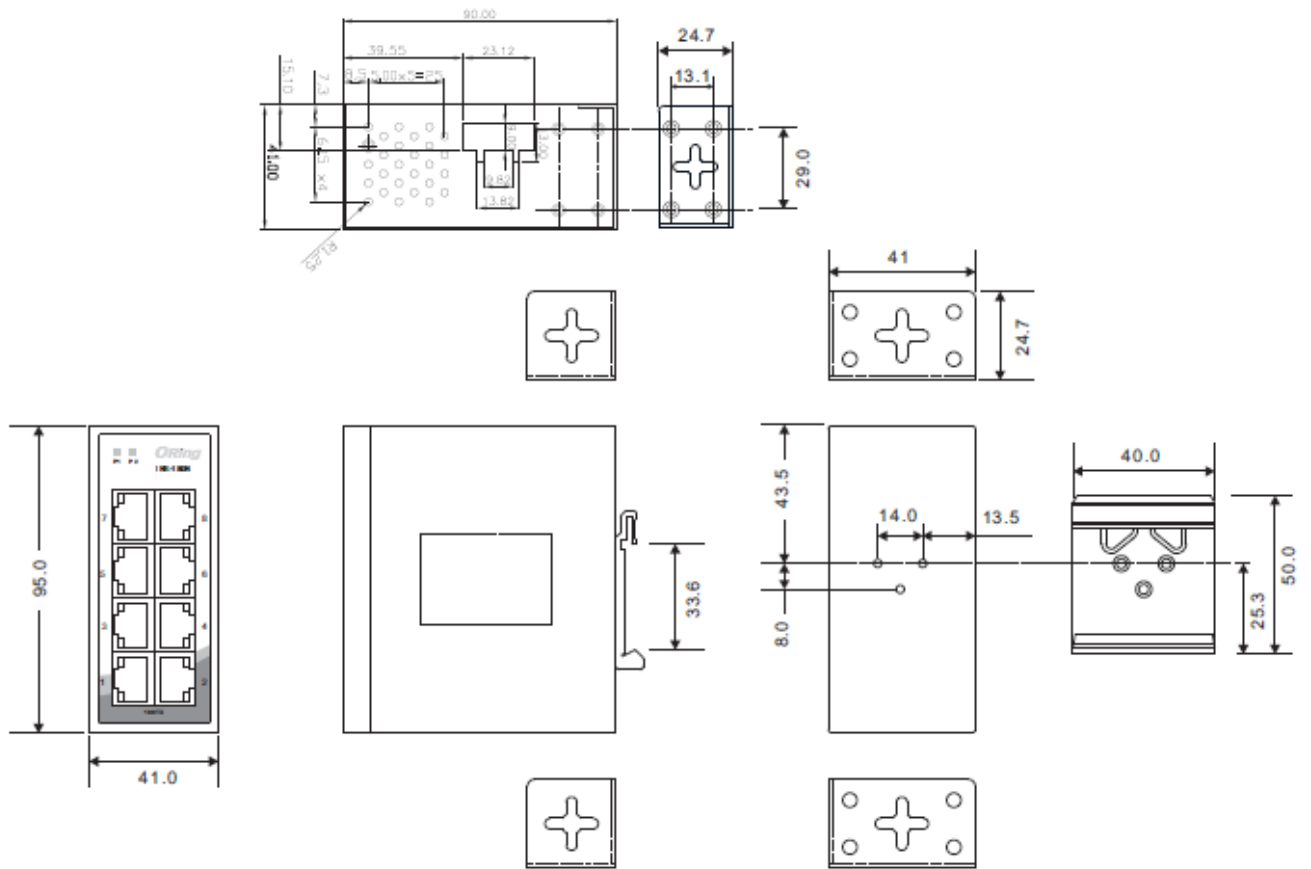

## Specifications

<b>ORing Switch Model</b>	IES-180B
<b>Physical Ports</b>	
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX	8
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control
MAC Table	1K MAC address
Processing	Store-and-Forward
Switch Latency	<7us
Switch Bandwidth	1Gbps
Packet buffer size	448K bits
<b>LED indicators</b>	
Power Indicator	Green for PWR1, PWR2
10/100Base-T(X) RJ45 Port Indicator	Upper for Link/Act indicator, Green for port Link/Act. Lower for speed indicator, Amber for 100Mbps, OFF for 10Mbps
<b>Power</b>	
Input Power	Dual 12~48 VDC voltage power input on 4-pin terminal block
Power Consumption (Typ.)	4W
Overload Current Protection	Present
Reverse Polarity Protection	Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	41 (W) x 90 (D) x 95 (H)mm (1.61 x 3.54 x 3.74 inch)
Weight (g)	334 g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1
MTBF	1390019 hrs
<b>Warranty</b>	5 years

H/W version: V2

## Ordering Information

IES-1ABB



Code Definition	10/100Base-T(X) Port Number	Additional Port Number
Option	- 8: 8 ports	- 0: 0 port

Available Model	Model Name	Description
	IES-180B	Industrial 8-port mini type unmanaged Ethernet switch with 8x10/100Base-T(X)

## Packing List

- IES-180B x 1
- Wall-mount Kit x 1
- Quick Installation Guide x 1
- Din-Rail Kit x 1

## Optional Accessories

- PAE-121000, 12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, EU plug
- DR/SDR/DRP Series DIN-Rail power supply
- PAA-121000, 12VDC/1000mA 12W Power Adapter with universal 100 to 240VAC input, US plug

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [ORing](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)  
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)  
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)  
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)  
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)  
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)