

IGMC-111GPB



➤ **Industrial mini type Gigabit Ethernet to fiber media converter with 1x100/1000Base-T(X) to 1x100/1000Base-X, SFP socket**


Features

- Supports 1 port 100/1000Base-T(X) auto-negotiation and auto-MDI/MDI-X
- Support Ethernet to SFP port signal conversion
- Ethernet port supports full/half duplex operation
- SFP port support full-duplex operation
- Supports store and forward transmission
- Provided DIP-Switch to setting SFP speed
- High reliability and rigid IP-30 housing
- DIN-Rail and wall mounting enabled




Introduction

IGMC-111GPB is a cost-effective solution for the conversion between 100/1000Base-T(X) and 100/1000Base-X interface, it allows you to extend communication distance by optical fiber. IGMC-111GPB supports MDI/MDIX auto detection, so you don't need to use crossover wires. IGMC-111GPB with wide operating temperature range from -40 ~ 70°C and accepts a wide voltage range from dual 12 ~ 48 VDC power inputs, so it is suitable for harsh operating environments. Therefore, the IGMC-111GPB is reliable media converter and can satisfy most demand of operating environment.

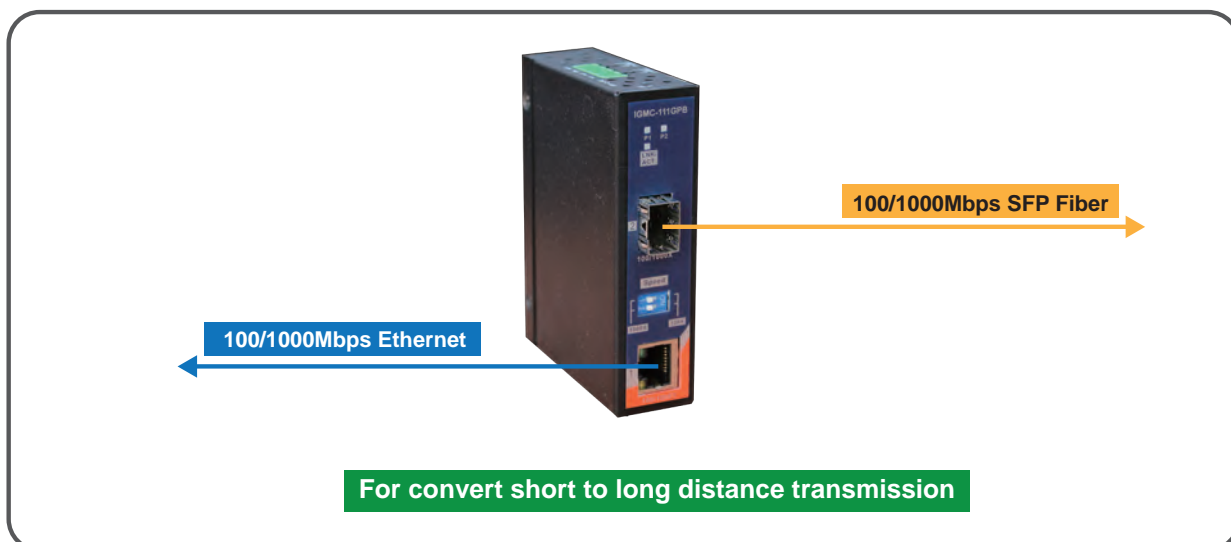

Connections of Media Converter

Dimensions

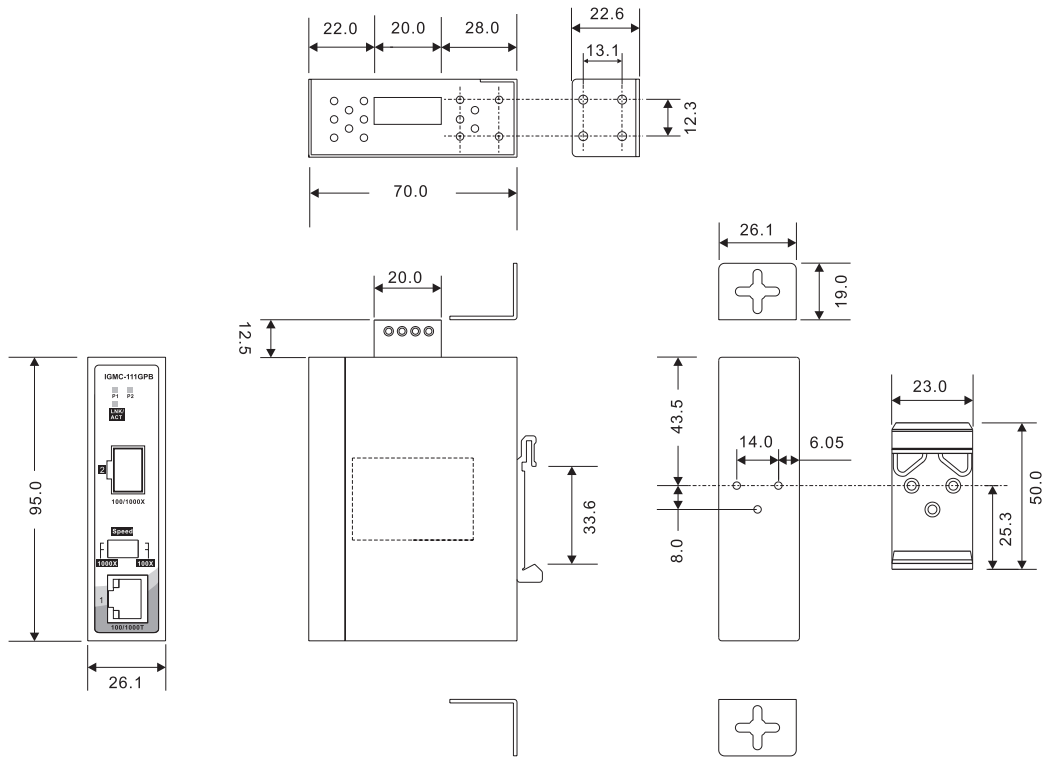

(Unit=mm)

Working Status

| Ethernet Port Status | SFP Fiber Port Status | Working Status |
|----------------------|-----------------------|----------------|
| 100Mbps | 100Mbps | Working |
| 100Mbps | 1000Mbps | Not Avail |
| 1000Mbps | 1000Mbps | Working |
| 1000Mbps | 100Mbps | Not Avail |

Specifications

| ORing Media Converter Model | IGMC-111GPB |
|-----------------------------------------------|-------------|
| Physical Ports | |
| 100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX | 1 |
| 100/1000Base-X SFP port | 1 |

| Technology | |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ethernet Standards | IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X |
| Processing | Store-and-Forward |
| DIP-Switch setting | DIP-Switch 1 (ON) and DIP-Switch 2 (ON) : SFP speed setting to 100Mbps DIP-Switch 1 (OFF) and DIP-Switch 2 (OFF) : SFP speed setting to 1000Mbps |
| LED Indicators | |
| Power Indicator | Green : Power LED x 2 (ON : power input on-line / (OFF) power input off-line |
| 10/100Base-T(X) RJ45 Port Indicator | LED for Link/Act and Speed indicator ~ Green on only : 1000Mbps Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down Green and Amber on : 100Mbps Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down *Note : If amber on only : 10Mbps (This is not working mode) |
| 100/1000Base-(F)X fiber port indicator | Green for fiber port Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down |
| Power | |
| Input Power | Dual 12~48 VDC voltage power input at 4-pin terminal block |
| Power Consumption (Typ.) | 3.6 Watts |
| Overload Current Protection | Present |
| Reverse Polarity Protection | Present |
| Physical Characteristics | |
| Enclosure | IP-30 |
| Dimensions (W x D x H) | 26.1 (W) x 70 (D) x 95 (H)mm (1.03 x 2.76 x 3.74 inch) |
| Weight (g) | 190 g |
| Environmental | |
| Storage Temperature | -40 to 85°C (-40 to 185°F) |
| Operating Temperature | -40 to 70°C (-40 to 158°F) |
| Operating Humidity | 5% to 95% Non-condensing |
| Regulatory Approvals | |
| EMI | FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4) |
| EMS | EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11 |
| Shock | IEC60068-2-27 |
| Free Fall | IEC60068-2-32 |
| Vibration | IEC60068-2-6 |
| Safety | EN60950-1 |
| Warranty | 5 years |

Ordering Information

IGMC-1 **A** **B** GPB

| Code Definition | 100/1000Base-T(X) Port Number | 100/1000Base-(F)X Fiber Port Number |
|-----------------|-------------------------------|-------------------------------------|
| Option | - 1 : 1 port | - 1 : 1 port |

| Available Model | Model Name | Description |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | IGMC-111GPB | Industrial mini type Gigabit Ethernet to fiber media converter with 1x100/1000Base-T(X) and 1x100/1000Base-X, SFP socket |
| Packing List <ul style="list-style-type: none"> • IGMC-111GPB • DIN-Rail Kit • Wall-Mount Kit • Quick Installation Guide | | Optional Accessories (Can be purchased separately) <ul style="list-style-type: none"> • DR-45 series : 45 Watts power supply • DR-75 series : 75 Watts power supply • DR-120 series : 120 Watts power supply • SDR-240-48, 240W DIN-Rail power supply • SDR-480-48, 480W DIN-Rail power supply • SFP100 series : 100Mbps SFP optical transceiver • SFP1G series : 1000Mbps SFP optical transceiver |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Media Converters](#) category:

Click to view products by [ORing](#) manufacturer:

Other Similar products are found below :

[EIS-PS-US](#) [CF-020010-009](#) [EIS-EXTEND-C-EU](#) [DT-51190.5m](#) [DT5002F](#) [WT32-ETH01](#) [USR-K6](#) [WC-PD13F012A](#) [WC-PD30B050G](#)
[EKI-2541ML-EU-AE](#) [EKI-2541SL-EU-AE](#) [EKI-2741ML-EU-AE](#) [EKI-2741SL-EU-AE](#) [CF-020011-2N9](#) [EKI-1751-AE](#) [EKI-1751PI-M-AE](#)
[EKI-1751PI-R-AE](#) [EKI-2541M-AE](#) [EKI-2541MI-AE](#) [EKI-2541S-AE](#) [EKI-2541SI-AE](#) [EKI-2741F-BE](#) [EKI-2741FI-BE](#) [EKI-2741FL-EU-AE](#)
[EKI-2741FL-US-AE](#) [EKI-2741LX-AE](#) [CA-628485-D84](#) [CA-628485-D85](#) [CF-020008-000](#) [CF-020008-001](#) [CF-020010-721](#) [CF-020010-97X](#)
[CF-020011-1N9](#) [CF-020011-32N](#) [CF-020011-330](#) [CF-901201-097](#) [CTC-55F005-NW](#) [102MCE-SC-15](#) [850-15526](#) [855-10932](#) [856-15410](#)
[857-11912](#) [IMC-350I-SE-PS-A](#) [IMC-350-MMST-PS-A](#) [IMC-350I-M8ST-PS-A](#) [IMC-350I-MM-A](#) [IMC-350I-SE-A](#) [IMC-350I-M8-A](#) [IMC-](#)
[370-MM-PS-A](#) [IMC-370I-MM-PS-A](#)