

◆ **Features:**




- ◇ Fast switching speed
开关速度快
- ◇ High input impedance and low level drive
高输入阻抗和低电平驱动
- ◇ Avalanche energy tested
雪崩能量测试
- ◇ Improved dv/dt capability, high ruggedness
提高 dv/dt 能力, 高耐用性

◆ **Applications**

- ◇ High efficiency switch mode power supplies
高效率开关电源
- ◇ Power factor correction
功率因数校正
- ◇ Electronic lamp ballast
电子整流器



TO-220

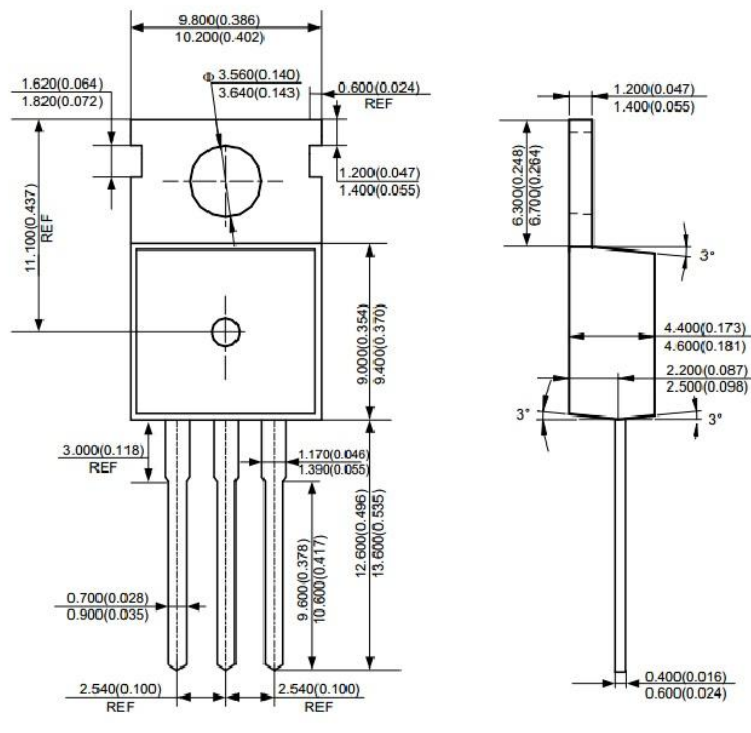

◆ Absolute Maximum Ratings (Tc=25°C)

| Symbol | Parameters | Ratings | Unit |
|------------------|--|------------|------|
| V _{DSS} | Drain-Source Voltage 漏源电压 | 200 | V |
| V _{GS} | Gate-Source Voltage-Continuous 栅源电压 | ±20 | V |
| I _D | Drain Current-Continuous (Note 2) 漏极持续电流 | 40 | A |
| I _{DM} | Drain Current-Single Plused (Note 1) 漏极单次脉冲电流 | 160 | A |
| P _D | Power Dissipation (Note 2) 功率损耗 | 250 | W |
| T _j | Max.Operating junction temperature 最大结温 | 150 | °C |

◆ Electrical characteristics (Tc=25°C unless otherwise noted)

| Symbo l | Parameters | Min | Typ | Max | Units | Conditions |
|-------------------------------|---|------------|-----------|-------------|-------|---|
| Static Characteristics | | | | | | |
| B _V DSS | Drain-Source Breakdown VoltageCurrent (Note 1) 漏极击穿电压 | 200 | -- | -- | V | I _D =250μA, V _{GS} =0V, T _J =25°C |
| V _{GS(th)} | Gate Threshold Voltage 栅极开启电压 | 2.0 | -- | 4.0 | V | V _{DS} =V _{GS} , I _D =250μA |
| R _{DS(on)} | Drain-Source On-Resistance 漏源导通电阻 | -- | -- | 72 | mΩ | V _{GS} =10V, I _D =16A |
| I _{GSS} | Gate-Body Leakage Current 栅极漏电流 | -- | -- | ±100 | nA | V _{GS} =±20V, V _{DS} =0 |
| I _{DSS} | Zero Gate Voltage Drain Current 零栅极电压漏极电流 | -- | -- | 1 | μA | V _{DS} =200V, V _{GS} =0 |
| g _{fs} | Forward Transconductance 正向跨导 | -- | 18 | -- | S | V _{DS} =40V, I _D =16A |

200V N-CHANNEL MOSFET

| Switching Characteristics | | | | | | |
|---------------------------|--|----|-------------|------------|---------------|---|
| $T_{d(on)}$ | Turn-On Delay Time 开启延迟时间 | -- | 28 | -- | ns | $V_{DS}=100V, I_D=30A,$ $R_G=25\Omega, V_{GS}=10V$ (Note 2) |
| T_r | Rise Time 上升时间 | -- | 36 | -- | ns | |
| $T_{d(off)}$ | Turn-Off Delay Time 关闭延迟时间 | -- | 153 | -- | ns | |
| T_f | Fall Time 下降时间 | -- | 88 | -- | ns | |
| Q_g | Total Gate Charge 栅极总电荷 | -- | 55 | -- | nC | $V_{DS}=160V,$ $V_{GS}=10V$ $I_D=30A$ (Note 2) |
| Q_{gs} | Gate-Source Charge 栅源极电荷 | -- | 11 | -- | nC | |
| Q_{gd} | Gate-Drain Charge 栅漏极电荷 | -- | 18 | -- | nC | |
| Dynamic Characteristics | | | | | | |
| C_{iss} | Input Capacitance 输入电容 | -- | 1450 | -- | pF | $V_{DS}=25V, V_{GS}=0,$ $f=1MHz$ |
| C_{oss} | Output Capacitance 输出电容 | -- | 350 | -- | pF | |
| C_{rss} | Reverse Transfer Capacitance 反向传输电容 | -- | 38 | -- | pF | |
| I_S | Continuous Drain-Source Diode Forward Current (Note 2) 二极管导通正向持续电流 | -- | -- | 40 | A | |
| V_{SD} | Diode Forward On-Voltage 二极管正向导通电压 | -- | -- | 1.4 | V | $I_S=30A, V_{GS}=0$ |
| $R_{th(j-c)}$ | Thermal Resistance, Junction to Case 结到外壳的热阻 | -- | -- | 0.5 | $^{\circ}C/W$ | |

Note 1: Repetitive Rating : Pulse width limited by maximum junction temperature

Note 2: Pulse test: PW \leq 300us , duty cycle \leq 2%.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [OSEN](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)