
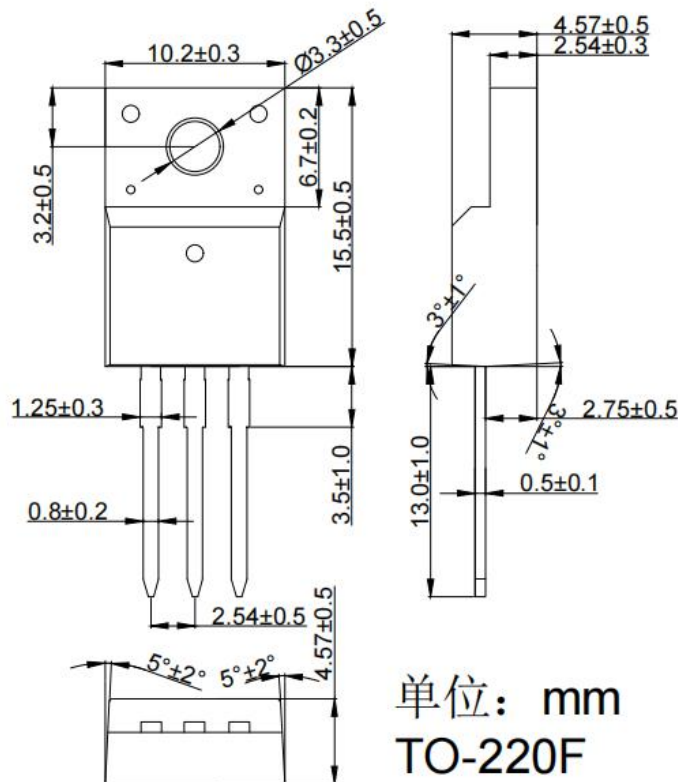
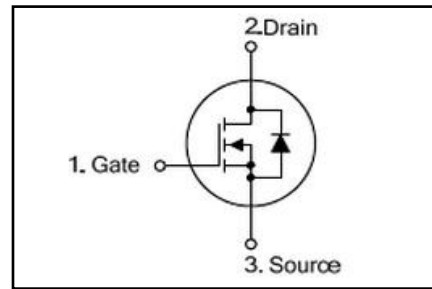


◆ **Features:**

- ◇ Fast switching speed  
开关速度快
- ◇ High input impedance and low level drive  
高输入阻抗和低电平驱动
- ◇ Avalanche energy tested  
雪崩能量测试
- ◇ Improved dv/dt capability, high ruggedness  
提高 dv/dt 能力, 高耐用性

◆ **Applications**

- ◇ High efficiency switch mode power supplies  
高效率开关电源
- ◇ Power factor correction  
功率因数校正
- ◇ Electronic lamp ballast  
电子整流器

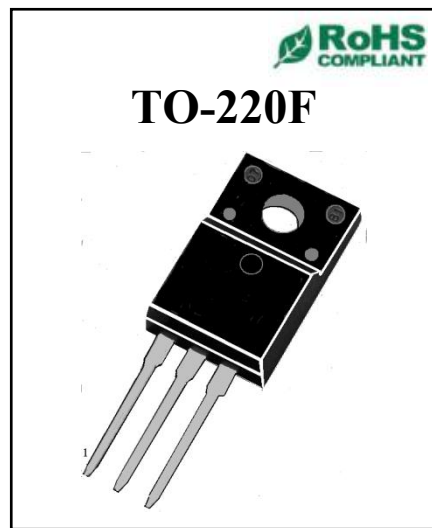

**◆ Absolute Maximum Ratings (Tc=25°C)**

| Symbol           | Parameters                                       | Ratings    | Unit |
|------------------|--|------------|------|
| V <sub>DSS</sub> | Drain-Source Voltage<br>漏源电压                     | <b>650</b> | V    |
| V <sub>GS</sub>  | Gate-Source Voltage-Continuous<br>栅源电压           | <b>±30</b> | V    |
| I <sub>D</sub>   | Drain Current-Continuous (Note 2)<br>漏极持续电流      | <b>12</b>  | A    |
| I <sub>DM</sub>  | Drain Current-Single Plused (Note 1)<br>漏极单次脉冲电流 | <b>48</b>  | A    |
| P <sub>D</sub>   | Power Dissipation (Note 2)<br>功率损耗               | <b>58</b>  | W    |
| T <sub>j</sub>   | Max.Operating junction temperature<br>最大结温       | <b>150</b> | °C   |

**◆ Electrical characteristics (Tc=25°C unless otherwise noted)**

| Symbo<br>l                    | Parameters  | Min        | Typ         | Max         | Units | Conditions  |
|-------------------------------|---|------------|-------------|-------------|-------|---|
| <b>Static Characteristics</b> |   |            |             |             |       |   |
| B <sub>VDSS</sub>             | Drain-Source Breakdown<br>VoltageCurrent (Note 1)<br>漏极击穿电压 | <b>650</b> | --          | --          | V     | I <sub>D</sub> =250μA,<br>V <sub>GS</sub> =0V, T <sub>J</sub> =25°C |
| V <sub>GS(th)</sub>           | Gate Threshold Voltage<br>栅极开启电压                            | <b>2.0</b> | --          | <b>4.0</b>  | V     | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA            |
| R <sub>Ds(on)</sub>           | Drain-Source On-Resistance<br>漏源导通电阻                        | --         | <b>0.62</b> | --          | Ω     | V <sub>GS</sub> =10V, I <sub>D</sub> =6A                            |
| I <sub>GSS</sub>              | Gate-Body Leakage Current<br>栅极漏电流                          | --         | --          | <b>±100</b> | nA    | V <sub>GS</sub> =±30V, V <sub>DS</sub> =0                           |
| I <sub>DSS</sub>              | Zero Gate Voltage Drain Current<br>零栅极电压漏极电流                | --         | --          | <b>1</b>    | μA    | V <sub>DS</sub> =650V, V <sub>GS</sub> =0                           |
| g <sub>fs</sub>               | Forward Transconductance<br>正向跨导                            | --         | <b>12.5</b> | --          | S     | V <sub>DS</sub> =15V, I <sub>D</sub> =6A                            |

| Switching Characteristics |  |    |             |            |               |  |
|---------------------------|--|----|-------------|------------|---------------|--|
| $T_{d(on)}$               | Turn-On Delay Time<br>开启延迟时间   | -- | <b>18</b>   | --         | ns            | $V_{DS}=325V, I_D=12A,$<br>$R_G=25\Omega$ (Note 2) |
| $T_r$                     | Rise Time<br>上升时间  | -- | <b>20</b>   | --         | ns            |  |
| $T_{d(off)}$              | Turn-Off Delay Time<br>关闭延迟时间  | -- | <b>45</b>   | --         | ns            |  |
| $T_f$                     | Fall Time<br>下降时间  | -- | <b>25</b>   | --         | ns            |  |
| $Q_g$                     | Total Gate Charge<br>栅极总电荷   | -- | <b>42</b>   | --         | nC            | $V_{DS}=325, V_{GS}=10V,$<br>$I_D=12A$ (Note 2)    |
| $Q_{gs}$                  | Gate-Source Charge<br>栅源极电荷  | -- | <b>8.5</b>  | --         | nC            |  |
| $Q_{gd}$                  | Gate-Drain Charge<br>栅漏极电荷   | -- | <b>21.5</b> | --         | nC            |  |
| Dynamic Characteristics   |  |    |             |            |               |  |
| $C_{iss}$                 | Input Capacitance<br>输入电容  | -- | <b>2100</b> | --         | pF            | $V_{DS}=25V, V_{GS}=0,$<br>$f=1MHz$                |
| $C_{oss}$                 | Output Capacitance<br>输出电容   | -- | <b>205</b>  | --         | pF            |  |
| $C_{rss}$                 | Reverse Transfer Capacitance<br>反向传输电容                                   | -- | <b>24.8</b> | --         | pF            |  |
| $I_S$                     | Continuous Drain-Source Diode<br>Forward Current (Note 2)<br>二极管导通正向持续电流 | -- | --          | <b>12</b>  | A             |  |
| $V_{SD}$                  | Diode Forward On-Voltage<br>二极管正向导通电压                                    | -- | --          | <b>1.4</b> | V             | $I_S=12A, V_{GS}=0$                                |
| $R_{th(j-c)}$             | Thermal Resistance, Junction to Case<br>结到外壳的热阻                          | -- | --          | <b>2.2</b> | $^{\circ}C/W$ |  |

Note 1: Repetitive Rating : Pulse width limited by maximum junction temperature

Note 2: Pulse test: PW  $\leq$  300us , duty cycle  $\leq$  2%.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [OSEN](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)  
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)  
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)  
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)  
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)