

OTi DALI 160/220-240/24 2CHDT6/8

CV Power supplies with DALI



Product family features

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1...100 % (for 50-80-160W) or 1...100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz

Product family benefits

- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- IP rating: IP20

Areas of application

- Cove lighting, wall washer, corridor, handrail, luminous ceilings
- Suitable for use in luminaires of protection class I and II

Technical data

Electrical data


| | |
|--|---------------------|
| Nominal input voltage | 220...240 V |
| Mains frequency | 50/60 Hz |
| Input voltage AC | 198...264 V |
| Input voltage DC | 176...276 V |
| Total harmonic distortion | < 5 % |
| Power factor λ | 0.92C...0.99 |
| Efficiency in full-load | 93 % ¹⁾ |
| Device power loss | 11.0 W |
| Inrush current | 57 A |
| Max. ECG no. on circuit breaker 10 A (B) | 4 |
| Max. ECG no. on circuit breaker 16 A (B) | 7 |
| Surge capability (L-N) | 1 kV |
| Nominal output voltage | 24 V ²⁾ |
| U-OUT (working voltage) | 24.2 V |
| Output PSTLM | ≤ 1 |
| Output SVM | ≤ 0.4 |
| Nominal output power | 160 W |
| Maximum output power | 160 W ³⁾ |
| Galvanic isolation | SELV |

1) at 230 V, 50 Hz

2) DC voltage

3) at steady state

Dimensions & weight

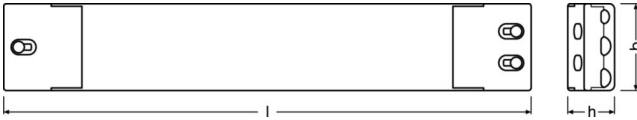

| | |
|---|---------------------------|
| Length | 300.0 mm |
| Width | 50.0 mm |
| Height | 35.0 mm |
| Mounting hole spacing, length | 258.0 mm |
| Cable cross-section, input side | 0.5...2.5 mm ² |
| Cable cross-section, output side | 0.5...2.5 mm ² |
| Wire preparation length, input side | 6.0 mm |
| Wire preparation length, output side | 6.0 mm |
| Product weight | 380.00 g |

Colors & materials

| | |
|------------------------|---------|
| Casing material | Plastic |
|------------------------|---------|

Temperatures & operating conditions

| | |
|---|------------------------|
| Ambient temperature range | -20...+45 °C |
| Maximum temperature at tc test point | 90 °C |
| Max.housing temperature in case of fault | 115 °C |
| Temperature range at storage | -40...+85 °C |
| Permitted rel. humidity during operation | 5...85 % ¹⁾ |

1) Maximum 56 days/year at 85 %

Lifespan

| | |
|---------------------|---------|
| ECG lifetime | 50000 h |
|---------------------|---------|

Capabilities

| | |
|---|------------------------|
| Dimmable | Yes |
| Dimming interface | DALI-2 / Touch DIM |
| Dimming range | 0.1...100 % |
| Dimming method | Pulse Width Modulation |
| Suitable for fixtures with prot. class | I / II |
| Type of connection, input side | Screw terminal |
| Type of connection, output side | Screw terminal |
| Number of channels | 2 |
| Overheating protection | Automatic reversible |
| Overload protection | Automatic reversible |
| Short-circuit protection | Automatic reversible |
| Intended for no-load operation | No |
| No-load proof | Yes |

Programming

| | |
|--------------|-----|
| Tuner4TRONIC | Yes |
|--------------|-----|

Certificates & standards

| | |
|---------------------------|---|
| Approval marks – approval | BIS / CCC / CE / EAC / EL / ENEC 10 / RCM / VDE / VDE-ENEC |
| Standards | Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384 / Acc. to EN 60598-2-22 / Acc. to EN 62386 / Acc. to EN 55015 |
| Protection class | 2 |

Logistical data

| | |
|----------------|-------------|
| Commodity code | 85044083900 |
|----------------|-------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|---------------|
| Date of Declaration | 22-03-2024 |
| Primary Article Identifier | 4062172177948 |
| Declaration No. in SCIP database | In work |

Download Data

| File | | |
|------------------------|------------|---|
| Certificates | PDF | ▶ OT VDE ENEC 40050684 290923 |
| CAD data 3-dim | Compressed | ▶ OTi DALI 160 220-240 24 _ 3D stp file |
| Mandatory Publications | PDF | ▶ OTI DALI CH DT CE 4294551 05 180823 |
| User instruction | PDF | ▶ OPTOTRONIC LED Power Supply |

Equipment / Accessories

Equipment / Accessories

- Suitable for 24 V LED modules

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|-------------------------------------|----------------------------------|--------------------------------------|-----------------------|--------------|
| 4062172177948 | OTi DALI 160/220-240/24 2CHDT6/8 | Shipping carton box 20 Pieces | 335 x 268 x 167 mm | 14.99 dm ³ | 7918.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Osram](#) manufacturer:

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [AC-A60VD24H2.5](#) [ALD-514012PJ134](#) [PWD-60-1-70-P](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [ESS010W-0500-12](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-240-54AB](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2 PLUG 2100MA BL](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W 350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#)