


Tuotetiedot			
Tuotekoodi	VG03-0033	Sähkönumero	1912388
Tuotenimi	OJL-liitin 280 Sininen	EAN-koodi	6410019123883
Johtimet	IN: 1xAl/Cu (35-120mm ²) OUT: 2xCu (6-35 mm ²) / 5xCu (2,5-16mm ²) / 4xCu (2,5-10mm ²)		
		ETIM-luokka	EC000276

Tekniset tiedot			
Nimellisvirta (IEC)	Cu	280	A
	Al	250	A
Nimellisjännite (IEC)		1000	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		120	mm ²
Kiristysmomentti			
	95-120 mm ²	19	Nm
	50-70 mm ²	10	Nm
	25-35 mm ²	6	Nm
	2,5-16 mm ²	3	Nm
Input	1xAl/Cu (35-120mm²)		
Output	2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)		
		-	
Käyttölämpötila		80	°C
Paino		178	g
IP-suojaus		IP20	
Standardit	EN 61238-1:2003; EN 60947-7-1:2009		
Väri / Materiaali	Sininen kansi/PC, Harmaa kotelo RAL 7035 PA66/V0, Runko tinapinnoitettua alumiinia		
Kiinnitys / KytKentä	DIN-kiskokiinnitys ja 2x ruuvikiinnitys (M5)		

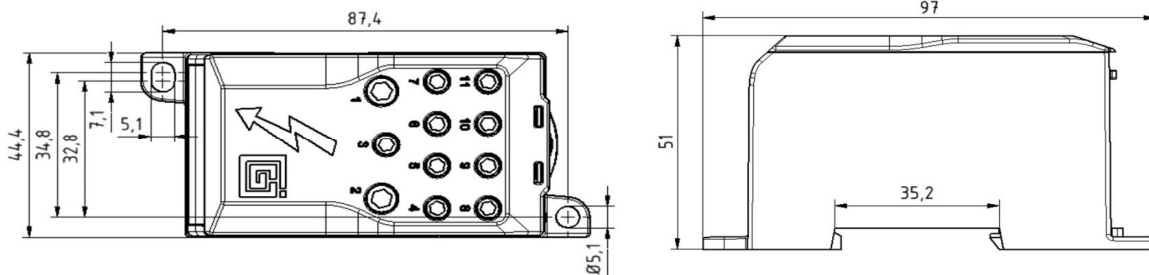

1-napainen OJL-liitin on tarkoitettu sähkölaitteiden haaroituskytkentöihin. Liittimessä 1 syöttöjohdin- ja 11 haaroitusjohdinaukkoa. Liitinrunko on tinapinnoitettua alumiinia.

Mittakuva


Pakkaus			
Pakkausmuoto	Laatikko	Kpl / Pakkaus	12
		Paino [kg]	2,30
Pituus [mm]	210	Leveys [mm]	155
		Korkeus [mm]	105

Ouneva Oy

 Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

 Tel. +358 400 179 750
info@ouneva.fi
www.ounevagroup.fi
www.ounevaproducts.fi

Product data

Product code	VG03-0033	STK-code	1912388	EAN-code	6410019123883
Product name	OJL-connector 280 Blue			ETIM class	EC000276
Wires	IN: 1xAl/Cu (35-120mm²) OUT: 2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)				

Technical data

Nominal current (IEC)	Cu	280	A
	Al	250	A
Nominal voltage (IEC)		1000	V
		-	
		-	
Number of poles		1	pcs
Max. Cross section		120	mm ²
Tightening torque			
	95-120 mm ²	19	Nm
	50-70 mm ²	10	Nm
	25-35 mm ²	6	Nm
	50-70 mm ²	3	Nm
Input	1xAl/Cu (35-120mm²)		
Output	2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)		
	-		
Operating temperature		80	°C
Weight		178	g
IP-protection		IP20	




Standards	EN 61238-1:2003; EN 60947-7-1:2009
Color / Material	Blue Cover/PC, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium
Mounting / Connection	DIN-rail and 2x screw (M5) mounting

Description

Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 11 output cables.

Drawing

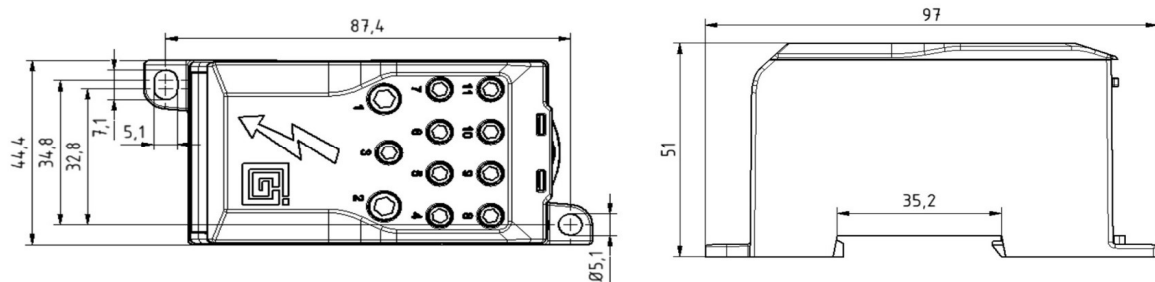

Package

Package	Box	Pcs / Package	12	Weight [kg]	2,30
Length [mm]	210	Width [mm]	155	Height [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Terminal Blocks](#) category:

Click to view products by [Ouneva](#) manufacturer:

Other Similar products are found below :

[00110420202](#) [00175550302](#) [CTS25U/BL](#) [9123140000](#) [RBO 5-T-B-HEX](#) [90.070](#) [90.202](#) [912314](#) [260-301_NR](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#)
[35956](#) [USK 10](#) [102510](#) [1126840000](#) [5520682](#) [EMH 25-ZE30](#) [1SNK706410R0000](#) [1SNK705210R0000](#) [1SNK705020R0000](#)
[1SNK506066R0000](#) [1SNK506061R0000](#) [1SNK506012R0000](#) [1SNK505060R0000](#) [UM 45-SEFE M.NUT BK](#) [1SNK506013R0000](#)
[1SNK506030R0000](#) [1SNK506062R0000](#) [1SNK506065R0000](#) [1SNK508062R0000](#) [1SNK508065R0000](#) [1SNK508066R0000](#)
[1SNK705010R0000](#) [1SNK705012R0000](#) [1SNK705150R0000](#) [1SNK705152R0000](#) [1SNK705310R0000](#)