

Tuotetiedot			
Tuotekoodi	VG03-0034	Sähkönumero	1912389
Tuotenimi	OJL-liitin 280 Vihreä	EAN-koodi	6410019123890
Johtimet	IN: 1xAl/Cu (35-120mm ²) OUT: 2xCu (6-35 mm ²) / 5xCu (2,5-16mm ²) / 4xCu (2,5-10mm ²)		
ETIM-luokka	EC000276		

Tekniset tiedot

Nimellisvirta (IEC)	Cu	280	A
	Al	250	A
Nimellisjännite (IEC)		1000	V
		-	
		-	
Napaluku		1	kpl
Max. Johdinkoko		120	mm ²
Kiristysmomentti			
	95-120 mm ²	19	Nm
	50-70 mm ²	10	Nm
	25-35 mm ²	6	Nm
	2,5-16 mm ²	3	Nm



Input	1xAl/Cu (35-120mm²)		
Output	2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)		


Käyttölämpötila		80	°C
Paino		178	g
IP-suojaus		IP20	


 Standardit **EN 61238-1:2003; EN 60947-7-1:2009**

 Väri / Materiaali **Vihreä kansi/PC, Harmaa kotelo RAL 7035 PA66/V0, Runko tinapinnoitettua alumiinia**

 Kiinnitys / KytKentä **DIN-kiskokiinnitys ja 2x ruuvikiinnitys (M5)**
Kuvaus

1-napainen OJL-liitin on tarkoitettu sähkölaitteiden haaroituskytkentöihin. Liittimessä 1 syöttöjohdin- ja 11 haaroitusjohdinuukkoa. Liitinrunko on tinapinnoitettua alumiinia.

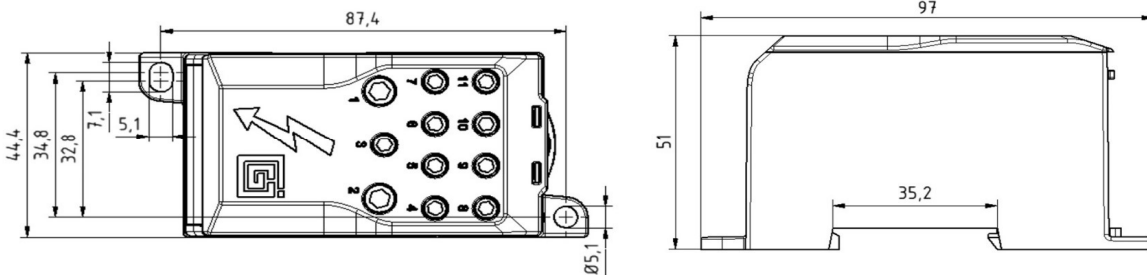Mittakuva


Pakkaus			
Pakkausmuoto	Laatikko	Kpl / Pakkaus	12
		Paino [kg]	2,30
Pituus [mm]	210	Leveys [mm]	155
		Korkeus [mm]	105

Ouneva Oy

 Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

 Tel. +358 400 179 750
info@ouneva.fi
www.ounevagroup.fi
www.ounevaproducts.fi

Product data

Product code	VG03-0034	STK-code	1912389	EAN-code	6410019123890
Product name	OJL-connector 280 Green			ETIM class	EC000276
Wires	IN: 1xAl/Cu (35-120mm²) OUT: 2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)				

Technical data

Nominal current (IEC)	Cu	280	A
	Al	250	A
Nominal voltage (IEC)		1000	V
		-	
		-	
Number of poles		1	pcs
Max. Cross section		120	mm ²
Tightening torque			
	95-120 mm ²	19	Nm
	50-70 mm ²	10	Nm
	25-35 mm ²	6	Nm
	50-70 mm ²	3	Nm

Input	1x Al/Cu (35-120mm²)
Output	2xCu (6-35 mm²) / 5xCu (2,5-16mm²) / 4xCu (2,5-10mm²)

Operating temperature	80	°C
Weight	178	g
IP-protection	IP20	

Standards **EN 61238-1:2003; EN 60947-7-1:2009**

Color / Material **Green Cover/PC, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium**


Mounting / Connection **DIN rail and 2x screw (M5) mounting**

Description



Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 11 output cables.

Drawing

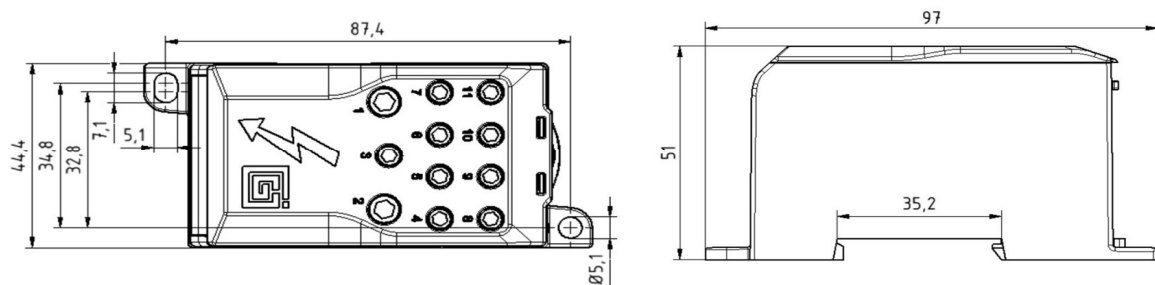

Package

Package	Box	Pcs / Package	12	Weight [kg]	2,30
Length [mm]	210	Width [mm]	155	Height [mm]	105

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Terminal Blocks](#) category:

Click to view products by [Ouneva](#) manufacturer:

Other Similar products are found below :

[00110420202](#) [00175550302](#) [CTS25U/BL](#) [9123140000](#) [RBO 5-T-B-HEX](#) [90.070](#) [90.202](#) [912314](#) [260-301_NR](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#)
[35956](#) [USK 10](#) [102510](#) [1126840000](#) [5520682](#) [EMH 25-ZE30](#) [1SNK706410R0000](#) [1SNK705210R0000](#) [1SNK705020R0000](#)
[1SNK506066R0000](#) [1SNK506061R0000](#) [1SNK506012R0000](#) [1SNK505060R0000](#) [UM 45-SEFE M.NUT BK](#) [1SNK506013R0000](#)
[1SNK506030R0000](#) [1SNK506062R0000](#) [1SNK506065R0000](#) [1SNK508062R0000](#) [1SNK508065R0000](#) [1SNK508066R0000](#)
[1SNK705010R0000](#) [1SNK705012R0000](#) [1SNK705150R0000](#) [1SNK705152R0000](#) [1SNK705310R0000](#)