

OW18D/E Multi in one multimeter

	OW18D/E Measurement Range	Accuracy
DC Voltage	20.000mV/200.00mV	±(0.05%+10 dig)
	2.0000V/20.000V/200.00V	±(0.1%+2 dig)
	1000.0V	±(0.15%+5 dig)
AC Voltage	20.000mV/200.00mV	±(0.5%+10dig)
	2.0000V/20.000V/200.00V	
	750.00V	±(0.8%+10dig)
DC Current	200.00uA	±(0.5%+10dig)
	2.0000mA/20.000mA/200.00mA	
	20.000A	±(2.0%+10dig)
AC Current	200.00uA	±(0.8%+10dig)
	2.0000mA/20.000mA/200.00mA	
	20.000A	±(2.5%+10dig)
Resistance	200.00Ω	±(0.5%+10dig)
	2.0000kΩ	±(0.3%+3dig)
	20.000kΩ/200.00kΩ/2.0000MΩ	±(0.3%+1dig)
	20.000MΩ	±(0.5%+1dig)
Capacitance	200.00MΩ	±(5.0%+10dig)
	2.0000nF/20.000nF/200.00nF/2.0000μ/20.000μ 200.00μ/2.0000mF/20.000mF	±(3.0%+10dig)
Frequency	200.00Hz/2.0000kHz 20.000kHz/200.00kHz/2.0000MHz/20.000MHz	±(0.1%+4dig)
Duty Ratio	0.1%~99.9%(typical value: rms=1V,f=1kHz)	±(1.2%+3dig)
	0.1%~99.9%(≥kHz)	±(2.5%+3dig)
Temperature	- 50 °C ~ 400°C(0.1°C)	±(1.0%+3°C)
	-58 °F ~ 752 °F(0.1°F)	±(1.2%+6°F)
Display	19999	
Frequency Response	(40 - 1000) Hz	
Sample rate	3 times/second	

Special Function

True RMS	√	Auto Ranging	√
Diode Test	√	LCD Backlight	√
Auto Power-off	√	Automatic-manual Range Selection	√
On-off Warning	√	Input Protection	√
Low-battery Indicator	√	Input Impedance	≥10MΩ
Data Hold	√	Safety Compliance	600V CATIV 1000V CATIII
Relative Measurement	√	NCV	√
Flashlight	√	Dimension (W×H×D)	190 x 90 x56 (mm)
		Weight (without package)	0.32 kg

Specifications subject to change without prior notice.

+ Accessories

The accessories subject to final delivery.



Multimeter Leads



K-type Thermocouple



Quick Guide



9V battery (optional)



Alligator Clip (optional)

Bluetooth Digital Multimeter



- + function as 3 in 1 : datalogger + multimeter + temperature meter
- + multi-connection (more than one device) supported via mobile app
- + the change trend analysis accessible via special chart mode
- + voice warning supported, which assures measurement safety
- + smart voice-reading accessible
- + 4000 / 6000 / 22000 - count full scale reading
- + larger display, easier data-reading; simulated bar chart
- + offline recording function (only in B33+, B35+, B35T+, and B41T+)
- + true RMS value available (only in D35T, B35T, B35T+, and B41T+)
- + Bluetooth 4.0 version - supports mobile device with Android 4.3 or above / iOS 7.0 or above OS, and equipped with ble 4.0 module



functioning as multimeter + datalogger

the measured data always updated, and auto- recorded to mobile device, saving labor to do on-site records; the recording duration, and sampling duration could be customized, accessible in chart mode, facilitating comparison analysis between several multimeters




remote control supported

the function activated after TTS voice pack installed, which frees the eye-watch, making on-site measurement more comfortable



data- saving, recalling, and comparatively analyzing

CSV format data export supported, the history data could be recalled for comparison analysis; with the assistance of chart mode, the measured result more visualized, easier for decision- making

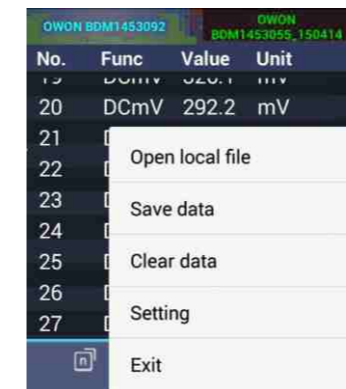

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [OWON](#) manufacturer:

Other Similar products are found below :

[2727795](#) [2727486](#) [6111-517](#) [40705X](#) [3026976](#) [P 8100](#) [OW18D](#) [OW18E](#) [OW18B](#) [UT334A](#) [1833C](#) [UT611](#) [1832C](#) [BM2807CSE](#) [45218](#)
[OW18A](#) [MM200](#) [UT52](#) [FMHT82565-0](#) [UT802](#) [UT12E-EU](#) [SEFRAM7212](#) [UT8805E](#) [UT60EU](#) [BM2803CSE](#) [45215](#) [UT8804E](#) [RS3250](#)
[BM2805CSE](#) [STHT0-77364](#) [RS3251](#) [NP40 000M0](#) [NP45 100M0](#) [BK391B](#) [BK393B](#) [BK390B](#) [FLK-87VMAX-PVLEAD1](#) [1664FC](#) [SCH](#)
[FTT KIT](#) [BK394B](#) [KPS-MT720](#) [KPS-MT460](#) [KPS-MT440](#) [KPS-MT700](#) [KPS-MT480](#) [KPS-SL100](#) [KPS-MT920](#) [KPS-MT470](#) [RS3248](#)
[UT267B](#) [KPSMT490CBINT](#)