


XDG2000 Series Dual-channel Arbitrary Waveform Generator




- + Max 100MHz frequency output
- + 500MSa/s Sample rate, Vertical resolution 1 μ Hz
- + 14 bits Vertical Resolution, 10Marb waveform length
- + Comprehensive waveform output : 6 basic waveforms, and 150 built-in arbitrary waveforms
- + Comprehensive modulation functions : AM, DSB-AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, 3FSK, 4FSK, OSK, PWM and SUM
- + High-accuracy frequency counter integrated, supported range 100mHz - 200MHz
- + SCPI, and LabVIEW supported
- + 7 inch (800 x 480 pixels) LCD

Equal performance dual channel output

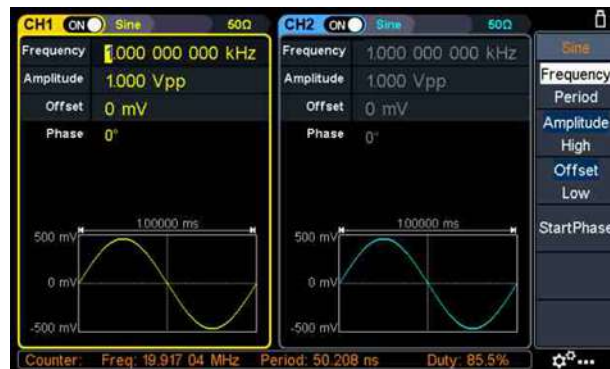


Rich sweep function

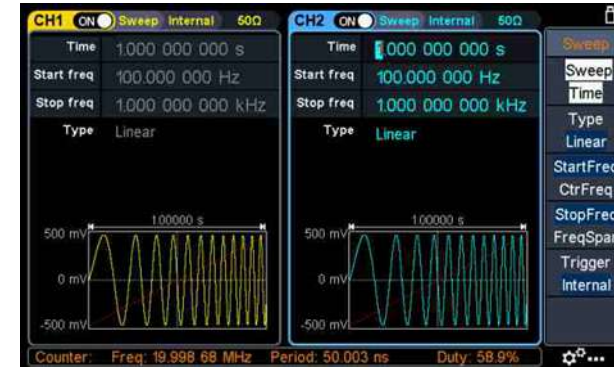

Rich analog and digital modulation



Build-in 152 arbitrary waveforms

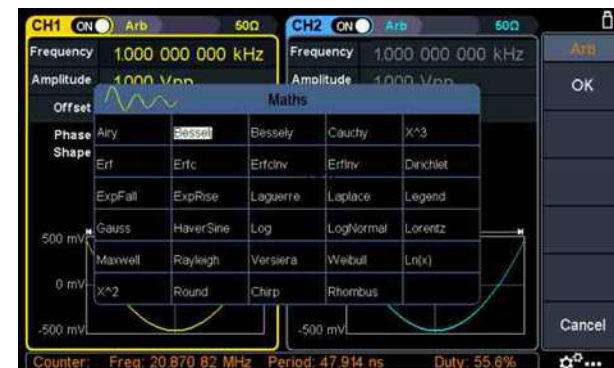


Model	XDG2100	XDG2080	XDG2060	XDG2035
Channel	2			
Frequency Output	100MHz	80MHz	60MHz	35MHz
Sample Rate	500MSa/s			
Vertical Resolution	14 bits			
Waveform				
Standard Waveform	sine, square, pulse, ramp, noise, and harmonic			
Arbitrary Waveform	exponential rise, exponential fall, sin(x)/x, step wave, and others, total 150 built-in waveforms, and user-defined arbitrary waveform			
Frequency (resolution 1μHz)				
Sine	1 μ z - 100MHz	1 μ z - 80MHz	1 μ z - 60MHz	1 μ z - 35MHz
Square	1 μ z - 30MHz	1 μ z - 30MHz	1 μ z - 30MHz	1 μ z - 15MHz
Pulse	1 μ z - 25MHz	1 μ z - 25MHz	1 μ z - 25MHz	1 μ z - 15MHz
Ramp	1 μ z - 3MHz	1 μ z - 3MHz	1 μ z - 3MHz	1 μ z - 3MHz
Noise (-3dB, typical)	100MHz	80MHz	60MHz	30MHz
Arbitrary Waveform	1 μ z - 15MHz	1 μ z - 15MHz	1 μ z - 15MHz	1 μ z - 15MHz
Harmonic	1 μ z - 50MHz	1 μ z - 40MHz	1 μ z - 30MHz	1 μ z - 17.5MHz
Accuracy	\pm 1ppm, 25 $^{\circ}$ C \pm 5 $^{\circ}$ C			
Waveform Length	2 points - 10M points			
Amplitude				
into 50 Ω load	1mVpp - 10Vpp (\leq 25MHz), 1mVpp - 5Vpp (\leq 60MHz), 1mVpp - 2.5Vpp (\leq 100MHz)			
Modulation				
Type	AM, DSB-AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, 3FSK, 4FSK, OSK, PWM, SUM			
Frequency Counter				
Function	Frequency, period, +width, -width, +duty, and -duty			
Frequency Range	100mHz - 200MHz			
Frequency Resolution	7 digits			
Input / Output				
Input mode	frequency counter, external modulation input, external trigger input, Internal clock output, external reference clock input / output			
Communication Interface	USB Host, USB Device, LAN, RS232 (optional)			
Mechanical specifications				
Size	340mm x 177mm x 90mm			
Weight	2.3kg			

Specifications subject to change without prior notice.

+ Accessories

The accessories subject to final delivery.

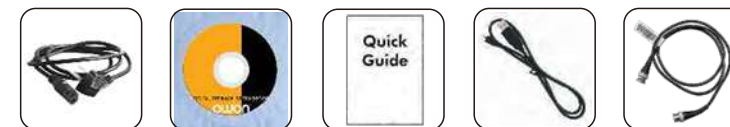

Power Cord CD Rom Quick Guide USB Cable Q9 Cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Function Generators & Synthesisers](#) category:

Click to view products by [OWON](#) manufacturer:

Other Similar products are found below :

[3001](#) [CT3734](#) [4047B](#) [4010A](#) [SFG-210](#) [33512B/903](#) [33521B/903](#) [33502A/903](#) [4013B](#) [AG051](#) [AG051F](#) [AG1011F](#) [AG1012](#) [AG1012F](#)
[AG1022](#) [AG1022F](#) [AD9166BBPZ](#) [BK4040B](#) [4033](#) [CT3736](#) [28II](#) [33622A/C13SPWR-900/C13SPWR-PLG](#) [3446GPBU](#) [EDU33211A](#)
[EDU33212A](#) [U2010A](#) [U2761A/2PS/903](#) [MOKU:GO M1 \(STORM\)](#) [MOKU:GO M0 \(STORM\)](#) [MOKU:GO M2 \(STORM\)](#) [MOKU:GO M0](#)
[\(WHITE\)](#) [MOKU:GO M1 \(WHITE\)](#) [MOKU:GO M2 \(WHITE\)](#) [P 4060](#) [P 4124](#) [IZD0024](#) [114991659](#) [T3AFG10](#) [T3AFG120](#) [T3AFG200](#)
[T3AFG500](#) [T3AFG350](#) [T3AFG40](#) [T3AFG5](#) [T3AFG30](#) [T3AFG60](#) [T3AFG80](#) [UTG2025A](#) [XDG2035](#) [XDG2060](#)