


SOD-123


Marking: B5817W: SJ
B5819W: SL

Features

High Current Capability
 Low Forward Voltage Drop
 Halogen free and RoHS compliant

Mechanical Data

SOD-123 Small Outline Plastic Package
 Polarity: Color band denotes cathode end
 Epoxy UL: 94V-0
 Mounting Position: Any

Maximum Ratings & Thermal Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	B5817W	B5819W	Unit
Maximum repetitive peak reverse voltage	VRRM	20	40	V
Maximum RMS voltage	VRMS	14	28	V
Maximum DC blocking voltage	VDC	20	40	V
Maximum average forward rectified current	IFM	1.0		A
Peak forward surge current 8.3 ms single half sine-wave	IFSM	9		A
Typical thermal resistance	RθJA	250		°C/W
Power Dissipation	PD	500		mW
Storage temperature range	TSTG	-50+150		°C

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)





Parameters	Symbol	Test conditions	B5817W	B5819W	Unit
Maximum forward voltage	VF	IF = 1.0A IF = 3.0A	0.450 0.750	0.600 0.900	V
Maximum reverse breakdown voltage	VR	IR=1mA	20	40	V
Maximum reverse current	IR	VR=20V B5817W VR=40V B5819W	1.0		mA
Type junction capacitance	Cj	VR = 4.0V, f = 1MHz	120		pF

Summary of Packing Options


Package	Packing Description	Packing Quantity	Industry Standard
SOD-123	Tape/Reel, 7" reel	3000	EIA-481-1



Ratings and Characteristic Curves

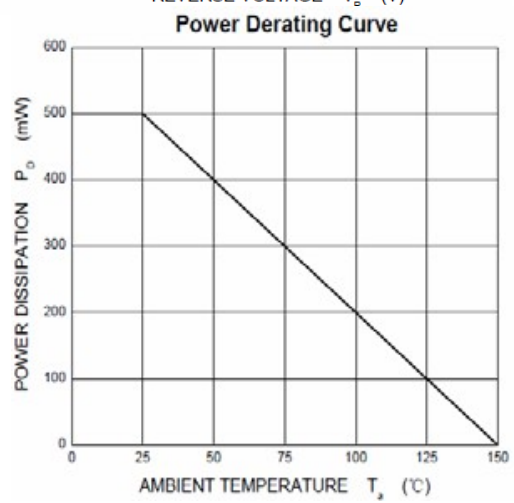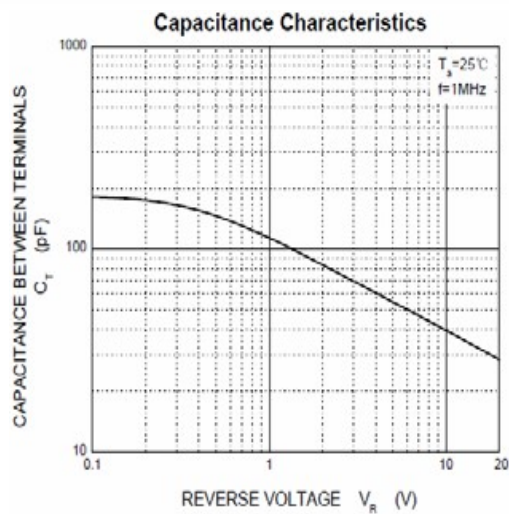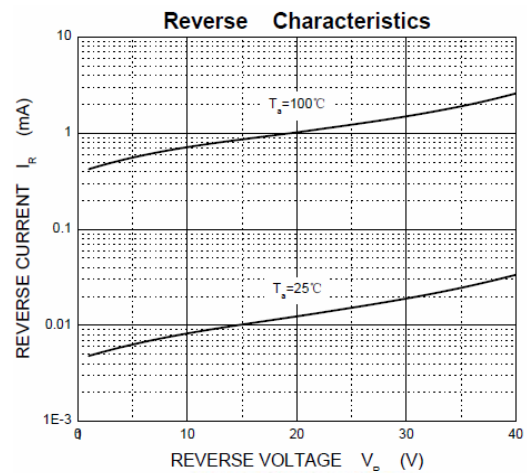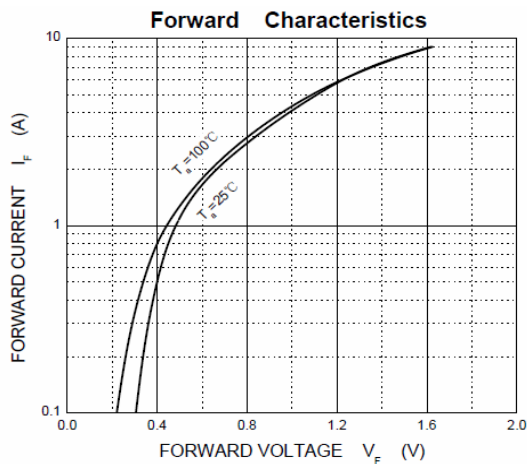

Package Outline Dimensions: SOD-123

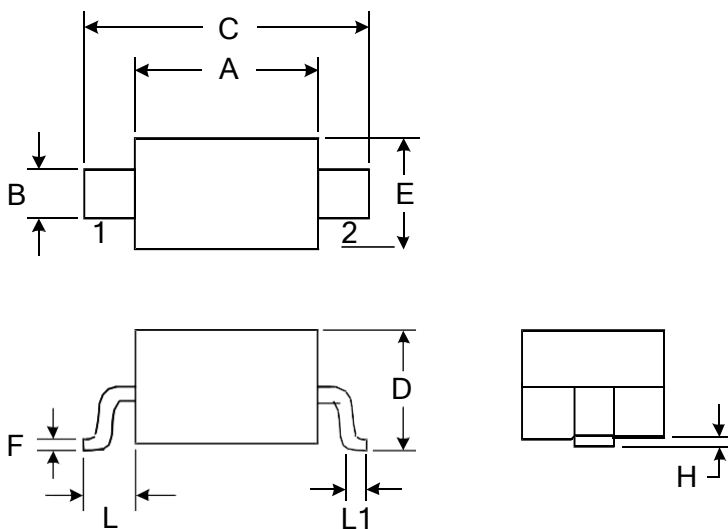

DIMENSIONS				
SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	2.600	2.800	0.102	0.110
B	0.450	0.650	0.018	0.026
C	3.550	3.850	0.139	0.152
D	1.050	1.250	0.041	0.049
E	1.500	1.700	0.059	0.067
F	0.080	0.150	0.003	0.006
L	0.500 REF		0.020REF	
L1	0.250	0.450	0.010	0.018
H	0.000	0.100	0.000	0.004

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [PAKER Microelectronics](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)