



SOT-23



MARKING: J1.Y.

Features

- Low $R_{DS(on)}$ @ $V_{GS}=10V$
- 3.3V Logic Level Control
- N Channel SOT23 Package
- Pb-Free, RoHS Compliant

Applications

- LED Lighting Application,
- ON/OFF switch
- Networking

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOT-23	Tape/Reel,7" reel	3000	EIA-481-1

Maximum Ratings & Thermal Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Symbol	Parameter	Rating	Unit
V_{GS}	Gate-Source Voltage	±12	V
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	50	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 150	°C
I_{DM}	Pulse Drain Current Tested①	$T_A=25^{\circ}C$ 1.8	A
I_D	Continuous Drain Current	$T_A=25^{\circ}C$ 0.5	A
		$T_A=70^{\circ}C$ 0.4	
P_D	Maximum Power Dissipation	$T_A=25^{\circ}C$ 0.3	W
		$T_A=70^{\circ}C$ 0.2	
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	400	°C/W

Notes: ① Pulse width limited by maximum allowable junction temperature

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified).

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	50	--	--	V
I_{DSS}	Zero Gate Voltage Drain Current($T_A=25^{\circ}C$)	$V_{DS}=50V, V_{GS}=0V$	--	--	1	μA
		$V_{DS}=40V, V_{GS}=0V$	--	--	100	uA
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 12V, V_{DS}=0V$	--	--	±100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	0.6	1.0	1.5	V
$R_{DS(ON)}$	Drain-Source On-State Resistance②	$V_{GS}=10V, I_D=0.5A$	--	1.0	2	Ω
		$V_{GS}=4.5V, I_D=0.3A$	--	1.2	2.5	Ω
		$V_{GS}=3.3V, I_D=0.2A$	--	1.6	4	Ω

Notes: ②Pulse test ; Pulse width≤300μs, duty cycle≤2%.

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified).

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Dynamic Electrical Characteristics						
C_{iss}	Input Capacitance	$V_{DS}=30V, V_{GS}=0V, f=1MHz$	--	23	--	pF
C_{oss}	Output Capacitance		--	3.8	--	pF
C_{rss}	Reverse Transfer Capacitance		--	1.5	--	pF
Q_g	Total Gate Charge	$V_{DS}=30V, I_D=0.5A, V_{GS}=10V$	--	0.91	--	nC
Q_{gs}	Gate Source Charge		--	0.18	--	nC
Q_{gd}	Gate Drain Charge		--	0.3	--	nC
Switching Characteristics						
$t_{d(on)}$	Turn on Delay Time	$V_{DD}=30V, I_D=0.3A, R_G=3.3\Omega, V_{GS}=10V$	--	6	--	ns
t_r	Turn on Rise Time		--	3.5	--	ns
$t_{d(off)}$	Turn Off Delay Time		--	20	--	ns
t_f	Turn Off Fall Time		--	5.9	--	ns
Source Drain Diode Characteristics						
I_{SD}	Source drain current(Body Diode)	$T_A=25^\circ C$	--	--	0.2	A
V_{SD}	Forward on voltage②	$T_j=25^\circ C, I_{SD}=0.5A, V_{GS}=0V$	--	0.78	1.2	V

Ratings and Characteristic Curves

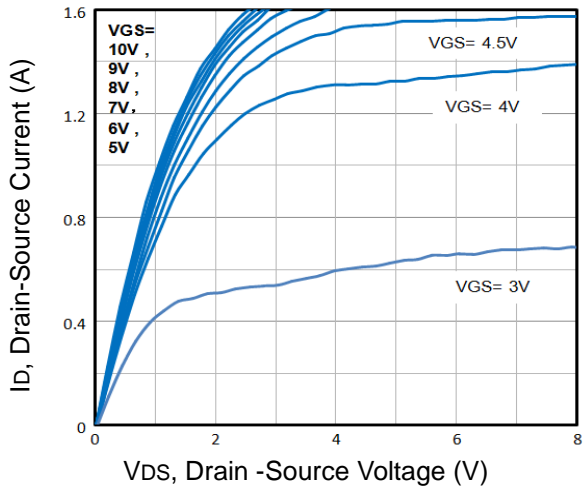


Fig1. Typical Output Characteristics

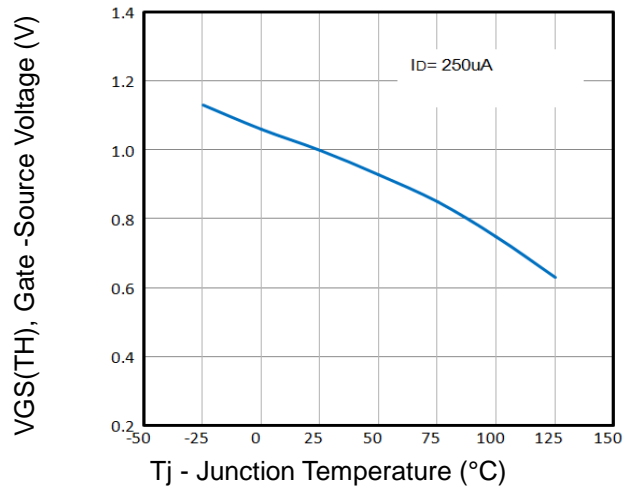


Fig2. Normalized Threshold Voltage Vs. Temperature

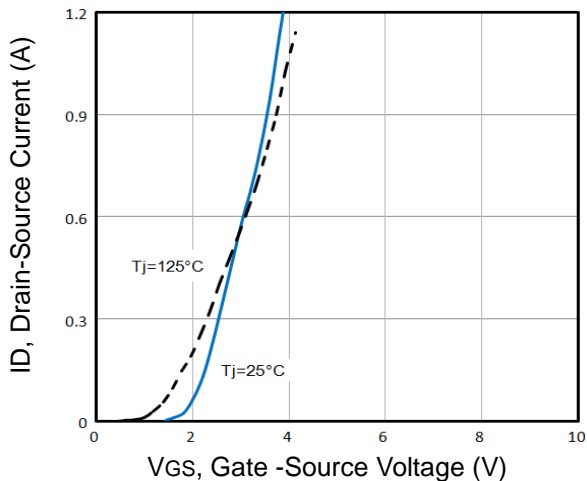


Fig3. Typical Transfer Characteristics

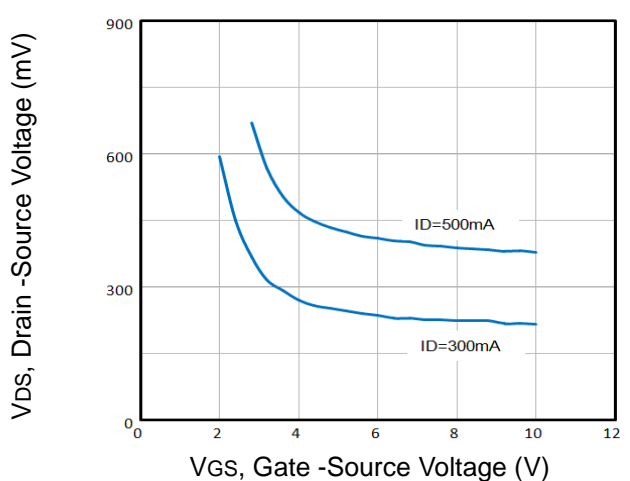


Fig4. Drain-Source Voltage vs Gate-Source Voltage

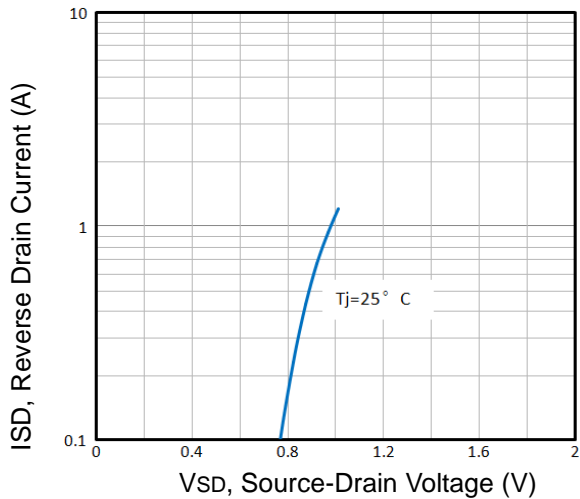


Fig5. Typical Source-Drain Diode Forward Voltage

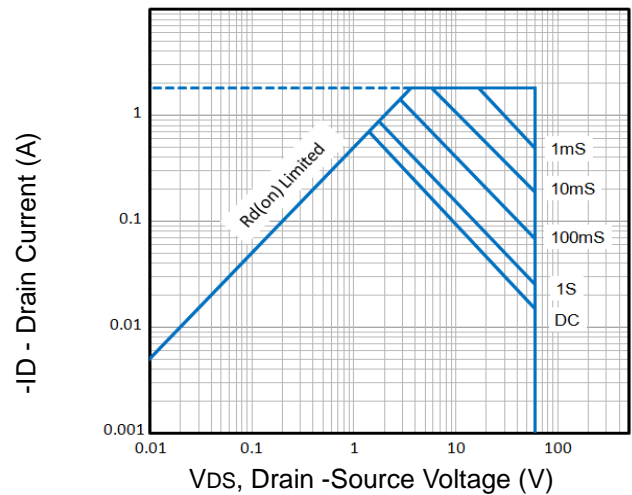


Fig6. Maximum Safe Operating Area

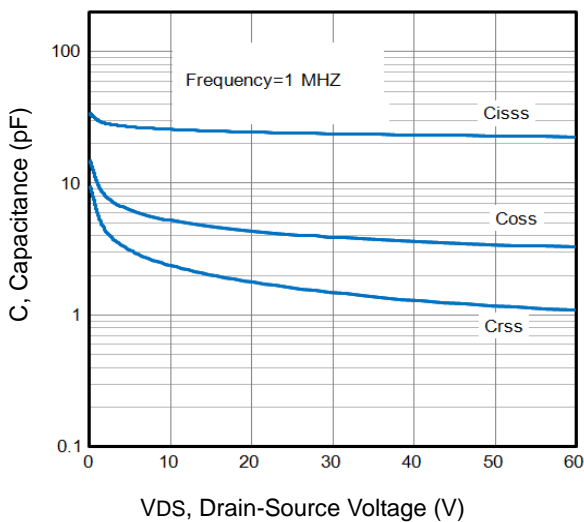


Fig7. Typical Capacitance Vs. Drain-Source Voltage


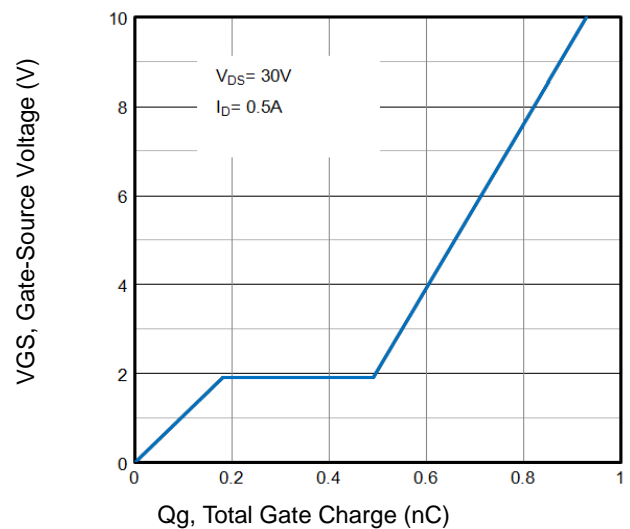


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

Package Outline Dimensions: SOT-23

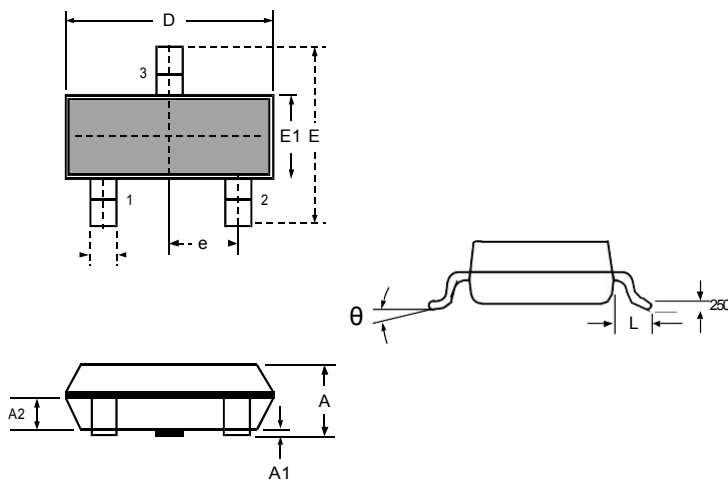

DIMENSIONS

SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
D	2.800	3.000	0.110	0.118
b	0.300	0.500	0.012	0.020
E	2.250	2.550	0.089	0.100
E1	1.200	1.400	0.047	0.055
e	0.950 BSC		0.037 BSC	
L	0.300	0.500	0.012	0.020
θ	0	8°	0	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [PAKER Microelectronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)