


Programmable Logic Controller




FPOH collects information from field-level devices.

Thanks to its two Ethernet ports, the ultra compact PLC allows flexible connection to field-level devices. The PLC supports a large number of open protocols.

Network hierarchy

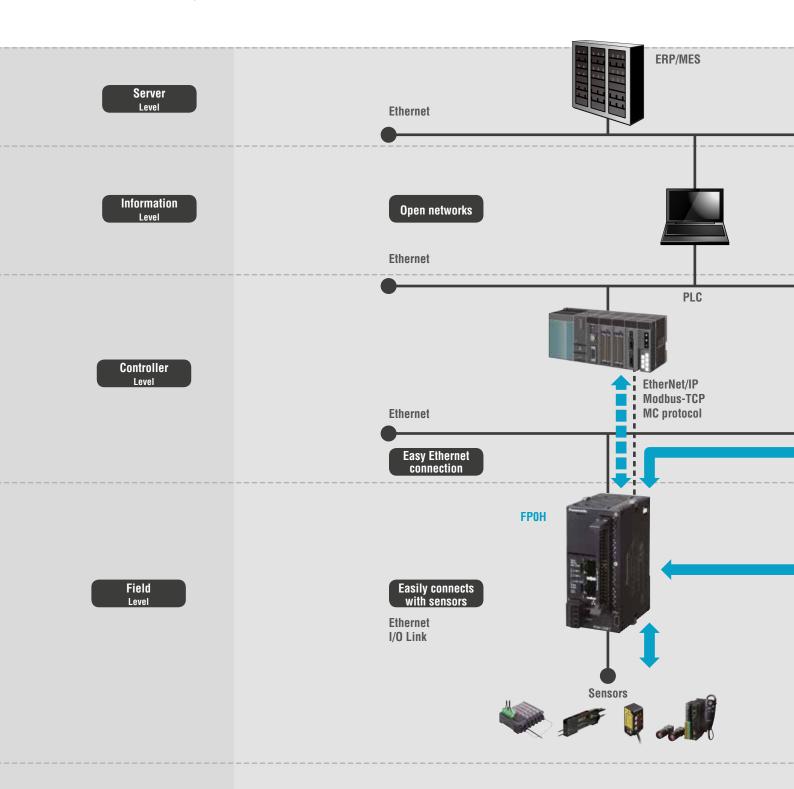

Information visualization using FP7's web-server function

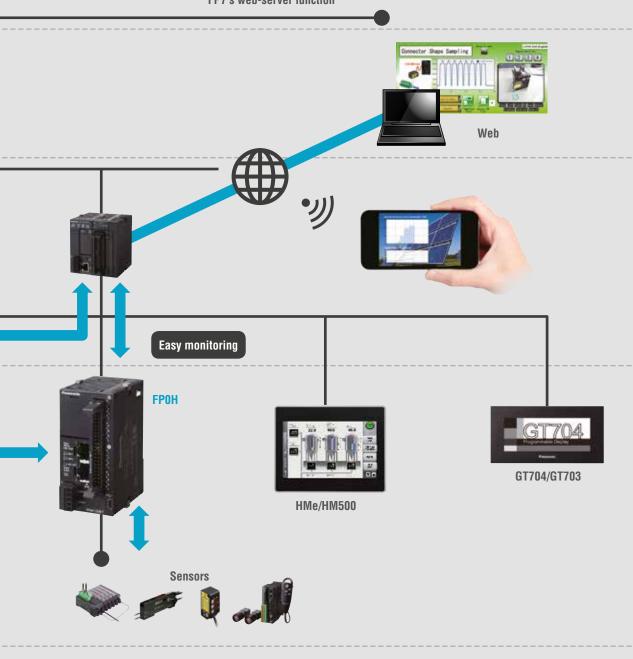

Excellent basic performance in an ultra-compact body

High-speed processing

Only 10ns per basic instruction (up to 10k steps), 8 x faster than conventional models

■ High capacity – two times larger than conventional models

Program capacity: 64k / 40k / 32k / 24k, data capacity: 12k / 24k / 32k / 64k

High compatibility

Ladder programs written for FP∑ (Sigma) can be converted for FP0H to facilitate the replacement.

To improve productivity in all types of equipment

Food processing machine

Packaging equipment

Inspection equipment

No. of inputs / outputs 16 inputs, 16 outputs (max. 384 with expansion units), transistor output (PNP/NPN)


Built-in interfaces Ethernet port x 2, RS232C port x 1, USB port x 1

Expansion FP0H / FP Σ (Sigma) expansion unit \times 1, FP0R expansion unit \times 1

Slot for communication cassette (RS232C, RS232C x 2, RS485, RS232C and RS485)

Programming software Control FPWIN Pro


Expandable to 384 inputs/outputs with FPOH / FP\Sigma (Sigma) / FPOR expansion units

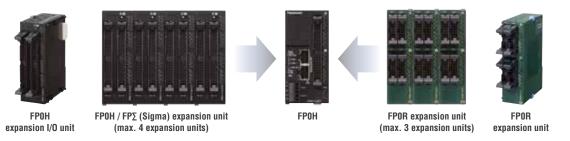

Suitable for ultra-fast linear servo drives

Built-in 4-axis pulse outputs

The control unit can control four axes with pulse output (up to 100kHz per axis), so simultaneous control of two 2-axis X-Y tables is possible. The configuration tool offers positioning tables to make it easy to set the parameters.

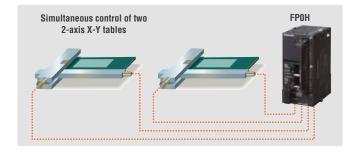


High-speed counter input

The speed of conveyor 1 (master axis), which is controlled by an inverter, is measured by counting pulse signals from the encoder with the high-speed counter input. The pulse output frequency is adjusted based on the count in order to synchronize the speed of conveyor 2 (slave axis).

Built-in multipoint PWM outputs (4 channels)

The pulse output port of FP0H can also serve as a PWM output port.

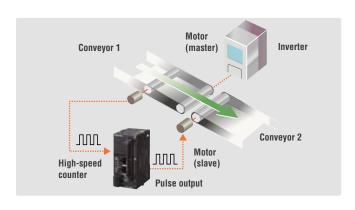

Connectivity and communication with the Ethernet type

- EtherNet/IP, Modbus-TCP and MC protocol compatibility
- Easy connection to all kinds of robots and PLCs
- Cassette system reduces unit cost and installation space

EtherNet/IP compatibility

The Ethernet type is compatible with EtherNet/IP, Modbus-TCP and MC protocol and can be connected easily to all kinds of robots and PLCs.

Cylinder, slider and remote I/O, etc. • AFPOHC32ET • AFPOHC32EP TCP/IP Server PC

Cassette system reduces unit cost and installation space

The communication cassette system extends the serial communication functionality of the CPU without the need to buy or install a dedicated communication unit.



SD memory card slot for the logging / trace function

- Use data logging and the trace function with SD memory cards
- Copy projects in ladder diagram without a PC (touch panel required)

Logging with 4 simultaneously active files

Logging can be performed with 4 simultaneously active files using various triggers such as bit, interval, instruction, and time.




Update programs with an SD memory card

SD memory cards can be used to store programs for and from the PLC. This makes it easy to update programs quickly if necessary.



Compact motion control for Panasonic motors

Control four axes with pulse output (up to 100kHz per axis)

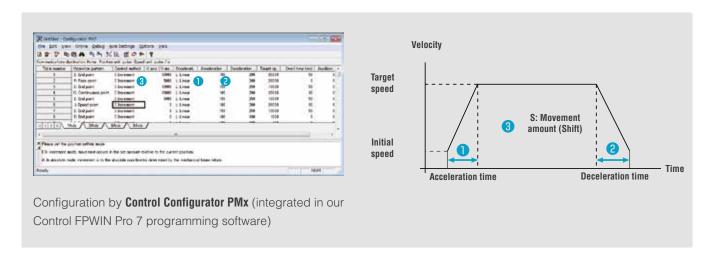

Suitable for ultra-fast linear servo drives

Pulse output of up to 4Mpps and fast startup in 5µs

The positioning units support ultra-fast linear servo drives with a pulse output of up to 4Mpps and fast startup in 5µs.

Ideal for applications with short-stroke actions

The FP0H positioning units are ideal for applications that repeat short-stroke actions quickly such as palletizing of electronics parts.

Built-in high-speed counter

A built-in high speed counter can detect abnormalities by counting feedback pulses from encoders during positioning.

■ Supports FP∑ (Sigma) positioning unit RTEX


The FP0H supports the three available types of FP∑ (Sigma) positioning units RTEX for controlling 2 axes, 4 axes and 8 axes. The positioning units RTEX can be used with servo drivers MINAS A5IIN / A6N for precise multi-axis position control.

The positioning units are compatible with commercially available LAN cables, which leads to a great reduction in wiring costs.

Thanks to the high communication speed of 100Mbit/s, highly accurate positioning control of multiple axes is possible.

The Configurator PM is a reliable and user-friendly software tool for the complete process from setup through startup and operation monitoring of the functions, including specification of axes to be used, parameter setting, data table creation, JOG operation, home return, and data monitoring





Product number	AFPOHC32EP/T (with Ethernet) AFPOHC32P/T (without Ethernet)		
No. of inputs/outputs	16 inputs, 16 outputs (max. 384 with expansion units), transistor output (PNP/NPN)		
High-speed counter	Single-phase 4 channels (max. 100kHz per input) or two-phase 2 channels (max. 50kHz per input)		
Interrupt input	Total 8 inputs (with high-speed counter)		
Pulse output	4 channels (max. 100 kHz per axis)		
PWM output	4 channels, 1Hz to 70kHz (at resolution of 1000), 70.001kHz to 100kHz (at resolution of 100)		
Built-in interfaces	Ethernet port x 2, RS232C port x 1, USB port x 1	RS232C port x 1, USB port x 1	
Expansion	FP0H / FP∑ (Sigma) expansion unit x 1, FP0R expansion unit x 1 Slot for communication cassette (RS232C, RS232C x 2, RS485, RS232C and RS485)		
SD memory card	Yes (SDHC) No		
Operation speed (basic instructions)	10ns (up to 10k steps)		
Program capacity	64k / 40k / 32k / 24k (depending on system register setting) 32k / 24k (depending on system register setting)		
Data register	12k / 24k / 32k / 64k (depending on system register setting) 24k / 32k (depending on system register setting)		
Clock/calendar function	Built-in		

LAN port communication specifications for AFPOHC32EP/T		
Communication port	100Base-TX/10Base-T Ethernet	
Baud rate	100Mbit/s, 10Mbit/s auto negotiation function	
Total cable length	100m (500m when a repeater is used)	
Number of simultaneous connections	Max. 10 (system connection: 1, user connection: 9)	
Communication method	Full-duplex / Half-duplex	
Protocol	TCP/IP, UDP	
DNS	Supports name servers	
DHCP	Automatic IP address acquisition	
SNTP	Time synchronization	
Communication mode	EtherNet/IP, MEWTOCOL-COM Master/Slave, MODBUS-TCP Master/Slave, MEWTOCOL-DAT Master/Slave, program controlled (4KB per connection, 1 to 9 user connections)	

Positioning units				
Product number	AFP0HPG01T	AFP0HPG02T	AFP0HPG01L	AFP0HPG02L
Output type	Transistor		Line driver	
Number of axes controlled	1	2 (independent)	1	2 (independent)
Max. operation speed	1pps to 500kpps		1pps to 4Mpps	
Functions	Linear acceleration / deceleration, S-curve acceleration / deceleration			

Communication cassettes		
Product number	Specifications	
AFPOHCCS1	RS232C, 1 channel (5 pins)	
AFPOHCCS2	RS232C, 2 channels (2 x 3 pins)	
AFPOHCCM1	RS485, 1 channel (3 pins)	
AFPOHCCS1M1	RS232C, 1 channel (3 pins) and RS485, 1 channel (2 pins, 19.2 or 115.2kbit/s)	

Global Network

Asia Pacific

China

Panasonic Electric Works

North America

Please contact our Global Sales Companies in:

 Headquarters 	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.com
Austria	Panasonic Electric Works Austria GmbH	Josef Madersperger Str. 2, 2362 Biedermannsdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	Panasonic Industrial Devices Materials Europe GmbH	Ennshafenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
Czech Republic	Panasonic Electric Works Europe AG, organizační složka	Administrative centre PLATINIUM, Veveri 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, www.panasonic-electric-works.cz
France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tél. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, www.panasonic-electric-works.fr
Germany	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.de
Hungary	Panasonic Electric Works Europe AG	Magyarországi Közvetlen Kereskedelmi Képviselet, 1117 Budapest, Neumann János u. 1., Tel. +43 2236 26846-25, Mobile: +36 20 264 9896, Fax +43 2236 46133, www.panasonic-electric-works.hu
Ireland	Panasonic Electric Works UK Ltd.	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
Italy	Panasonic Electric Works Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, www.panasonic-electric-works.it
Nordic Countries	Panasonic Electric Works Europe AG Panasonic Eco Solutions Nordic AB	Filial Nordic, Knarrarnäsgatan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
Poland	Panasonic Electric Works Polska sp. z o.o	ul. Wołoska 9A, 02-583 Warszawa, Tel. +48 22 338-11-33, Fax +48 22 338-12-00, www.panasonic-electric-works.pl
Spain	Panasonic Electric Works España S.A.	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
Switzerland	Panasonic Electric Works Schweiz AG	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
United Kingdom	Panasonic Electric Works UK Ltd.	Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6 LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk

▶ USA Panasonic Industrial Devices Sales Company Two Riverfront Plaza, 7th Floor, Newark, NJ 07102-5490, Tel. 1-8003-442-112, www.pewa.panasonic.com of America

Asia Pacific/China/Jap

▶ Hong Kong

▶ China Panasonic Electric Works Sales (China) Co. Ltd. Tower C 3rd Floor, Office Park, NO.5 Jinghua South Street, Chaoyang District, Beijing 100020, Tel. +86-10-5925-5988, Fax +86-10-5925-5980

Panasonic Industrial Devices Sales (HK) Co.,

Europe

Suite~301,~3/F,~Chinachem~Golden~Plaza,~77~Mody~Road,~TST~East,~Kowloon,~Hong~Kong,~Tel.~+852-2529-3956,~Fax~+852-2528-6991

Panasonic Corporation ▶ Japan

1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501, Japan, Tel. +81-6-6908-1121, www.panasonic.net **Panasonic Industrial Devices**

No.3 Bedok South Road, Singapore 469269, Tel. +65-6299-9181, Fax +65-6390-3953 **▶** Singapore **Automation Controls Sales Asia Pacific**



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for panasonic manufacturer:

Other Similar products are found below:

ECE-A1HKAR47 ELK-EA102FA ELC-09D151F EEC-S0HD224H ELL-5PS3R3N HC2-H-DC48V-F HL2-HP-AC120V-F HL2-H-DC12V-F HL2-HP-DC6V-F HL2-HP-DC24V-F HC4-H-DC24V HL2-HTM-DC24V-F HL2-HTM-AC24V-F HC4-H-AC24V HC4-H-AC120V EEC-RG0V155H AZH2031 RP-SDMF64DA1 EEF-UD0K101R EVM-F6SA00B55 RP-SMLE08DA1 ELC-12D101E ERA-3YEB272V EEC-RF0V684 ERA-3YEB153V ELC-3FN2R2N ERA-3YEB512V ERJ-1GEJ564C ERZ-V20R391 ETQ-P3W3R3WFN ELL-ATV681M ELK-EA100FA EEF-UD0J101R LC-R121R3P ERA-3YEB303V ERZ-V05V680CB EEF-UE0K101R ELK-E101FA EEC-S0HD224V EVQ-PAC05R ELK-EA222FA LT4H-DC24V LT4HL8-AC24V LT4HW-AC24V LT4HWT8-AC240V LT4HWT-AC240VS CX-444-P-Z CY-122A-P ETQ-P5M470YFM