



**DIP6-pin type suited for radio frequent switching**

**PhotoMOS<sup>®</sup>**  
**RF 1 Form A**  
**(AQV220)**

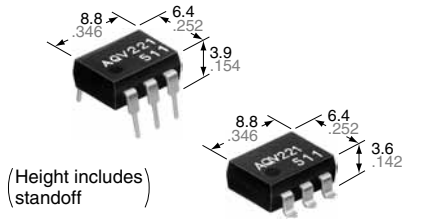

**RoHS compliant**

## FEATURES

### 1. High frequency characteristics with low capacitance between output terminals

Low output capacitance: typ. 4.8 pF  
Isolation loss: 40 dB or more (at 1 MHz)  
(AQV225)

### 2. High speed switching

Turn on time: typ. 0.1 ms  
Turn off time: typ. 0.03 ms

### 3. Low-level off state leakage current of typ. 0.03 nA

### 4. Controls low-level analog signals

PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

## TYPICAL APPLICATIONS

### 1. Measuring instruments

Scanner, IC checker, Board tester, etc.

### 2. Audio visual equipment

CD, VCR

### 3. Security equipment

## TYPES

	Output rating*		Package	Part No.				Packing quantity	
	Load voltage	Load current		Through hole terminal	Surface-mount terminal			Tube	Tape and reel
				Tube packing style	Tape and reel packing style				
			Picked from the 1/2/3-pin side		Picked from the 4/5/6-pin side				
AC/DC dual use	40 V	80 mA	DIP6-pin	AQV221	AQV221A	AQV221AX	AQV221AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs
	80 V	50 mA		AQV225	AQV225A	AQV225AX	AQV225AZ		

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

## RATING


### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA		
	LED reverse voltage	V <sub>R</sub>	5 V		
	Peak forward current	I <sub>FP</sub>	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW		
Load voltage (peak AC)	V <sub>L</sub>	40 V	80 V		
Output	Continuous load current	A	0.08 A	0.05 A	A connection: Peak AC, DC B, C connection: DC
		B	0.09 A	0.06 A	
		C	0.12 A	0.075 A	
	Peak load current	I <sub>peak</sub>	0.18 A	0.15 A	
Power dissipation	P <sub>out</sub>	230 mW			
Total power dissipation	P <sub>T</sub>	280 mW			
I/O isolation voltage	V <sub>iso</sub>	1,500 V AC			
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F		

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks	
Input	LED operate current	Typical	I <sub>Fon</sub>	0.9 mA		I <sub>L</sub> = Max.	
		Maximum		3 mA			
	LED turn off current	Minimum	I <sub>Foff</sub>	0.4 mA		I <sub>L</sub> = Max.	
		Typical		0.85 mA			
LED dropout voltage	Typical	V <sub>F</sub>	1.25 V (1.14 V at I <sub>F</sub> = 5 mA)		I <sub>F</sub> = 50 mA		
	Maximum		1.5 V				
Output	On resistance	Typical	R <sub>on</sub>	A	22 Ω	36 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			35 Ω	50 Ω	
		Typical	R <sub>on</sub>	B	13 Ω	21 Ω	
		Maximum			18 Ω	25 Ω	
	Output capacitance	Typical	C <sub>out</sub>	—	5.6 pF	4.8 pF	I <sub>F</sub> = 0 mA V <sub>B</sub> = 0 V f = 1 MHz
		Maximum			8 pF		
	Off state leakage current	Typical	I <sub>Leak</sub>	—	0.03 nA		I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.
		Maximum			10 nA		
Transfer characteristics	Turn on time*	Typical	T <sub>on</sub>	—	0.1 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum			0.3 ms		
	Turn off time*	Typical	T <sub>off</sub>	—	0.03 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum			0.1 ms		
	I/O capacitance	Typical	C <sub>iso</sub>	—	0.8 pF		f = 1 MHz V <sub>B</sub> = 0 V
		Maximum			1.5 pF		
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ		500 V DC	

\*Turn on/Turn off time

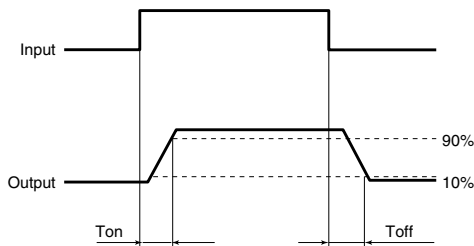

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.


# RF 1 Form A (AQV220)

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A




### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 5 mA; Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

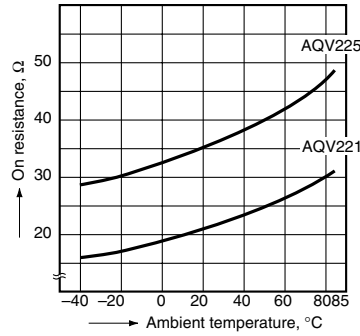


### 3. Turn on time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

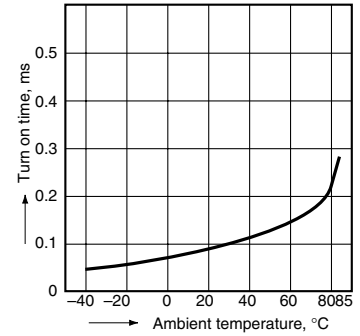


### 4. Turn off time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)




### 5. LED operate current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)




### 6. LED turn off current vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

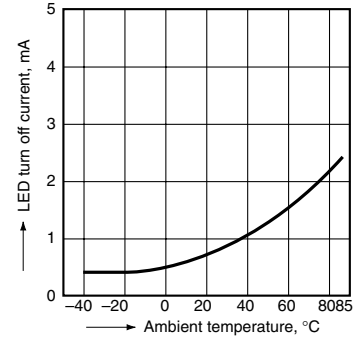


### 7. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV221, AQV225;  
 LED current: 5 to 50 mA




### 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$




### 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

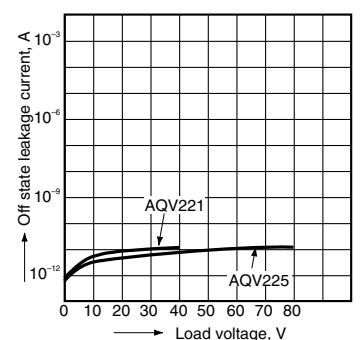


### 10. Turn on time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
 Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F




### 11. Turn off time vs. LED forward current characteristics

Sample: AQV221, AQV225;  
 Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F




### 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

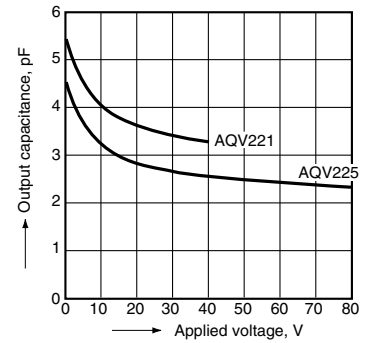


### 13. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

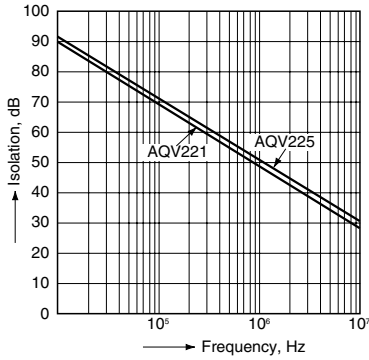

### 14. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

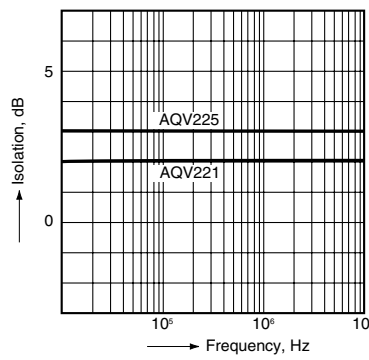

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Relays - PCB Mount](#) category:*

*Click to view products by [Panasonic](#) manufacturer:*

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)  
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)  
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)  
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)  
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)