



**DIP8-pin type with reinforced insulation**

**PhotoMOS®**

**GE 2 Form A  
(AQW210EH)**

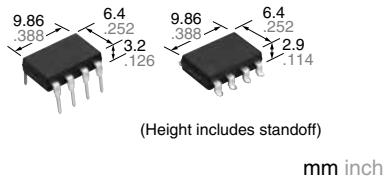

**RoHS compliant**

### FEATURES

#### 1. Reinforced insulation of 5,000 V

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

#### 2. Applicable for 2 Form A use as well as two independent 1 Form A use

#### 3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

#### 4. High sensitivity and high speed response

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of Typ. 0.5 ms (AQW210EH).

#### 5. Low-level off state leakage current of max. 1 µA

### TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Electricity, plant equipment
- Security equipment
- Sensing equipment

### TYPES

I/O isolation voltage	Output rating*	Package	Part No.			Packing quantity	
			Through hole terminal		Surface-mount terminal		
			Load voltage	Load current	Tube packing style	Tape and reel packing style	Tube
AC/DC dual use	Reinforced 5,000 Vrms	DIP8-pin	60 V	500 mA	AQW212EH	AQW212EHA	AQW212EHAX
			350 V	120 mA	AQW210EH	AQW210EHA	AQW210EHAX
			400 V	100 mA	AQW214EH	AQW214EHA	AQW214EHAX
			600 V	40 mA	AQW216EH	AQW216EHA	AQW216EHAX
*Indicate the peak AC and DC values.		Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.					

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING


#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>		50mA			
	LED reverse voltage	V <sub>R</sub>		5V			
	Peak forward current	I <sub>FP</sub>		1A			f =100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75mW			
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	350 V	400 V	600 V	
	Continuous load current	I <sub>L</sub>	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A)	0.04 A (0.05 A)	Peak AC, DC ( ): in case of using only 1 channel
	Peak load current	I <sub>peak</sub>	1.5 A	0.36 A	0.3 A	0.12 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		800mW			
Total power dissipation		P <sub>T</sub>		850mW			
I/O isolation voltage		V <sub>iso</sub>		5,000 Vrms			
Ambient temperature	Operating	T <sub>opr</sub>		-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	T <sub>stg</sub>		-40 to +100°C -40 to +212°F			

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Condition
Input	LED operate current	Typical	$I_{Fon}$	1.2mA			$I_L=Max.$
		Maximum		3.0mA			
Input	LED turn off current	Minimum	$I_{Foff}$	0.4mA			$I_L=Max.$
		Typical		1.1mA			
Input	LED dropout voltage	Typical	$V_F$	1.25 V (1.14 V at $I_F=5mA$ )			$I_F=50mA$
		Maximum		1.5V			
Output	On resistance	Typical	$R_{on}$	0.83Ω	18Ω	26Ω	52Ω
		Maximum		2.5Ω	25Ω	35Ω	120Ω
Output	Off state leakage current	Maximum	$I_{Leak}$	1μA			
							$I_F=0mA$ $V_L=Max.$
Transfer characteristics	Turn on time*	Typical	$T_{on}$	1ms	0.5ms		$I_F=5mA$ $I_L=Max.$
		Maximum		4ms	2.0ms		
	Turn off time*	Typical	$T_{off}$	0.08ms		0.04ms	$I_F=5mA$ $I_L=Max.$
		Maximum		1.0ms			
Transfer characteristics	I/O capacitance	Typical	$C_{iso}$	0.8pF			$f = 1MHz$ $V_B = 0V$
		Maximum		1.5pF			
Transfer characteristics	Initial I/O isolation resistance	Minimum	$R_{iso}$	1,000MΩ			500V DC

\*Turn on/Turn off time

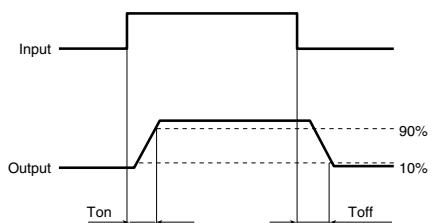

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item	Symbol	Number of used channels	Min.	Max.	Unit
AQW212EH(A)	LED current	$I_F$	5	30	mA
	Load voltage (Peak AC)	$V_L$	—	48	V
	Continuous load current	$I_L$	1ch 2ch	0.6 0.5	A
AQW210EH(A)	Load voltage (Peak AC)	$V_L$	—	280	V
	Continuous load current	$I_L$	1ch 2ch	0.14 0.12	A
	Load voltage (Peak AC)	$V_L$	—	320	V
AQW214EH(A)	Continuous load current	$I_L$	1ch 2ch	0.13 0.1	A
	Load voltage (Peak AC)	$V_L$	—	480	V
AQW216EH(A)	Continuous load current	$I_L$	1ch 2ch	0.05 0.04	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics  
Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

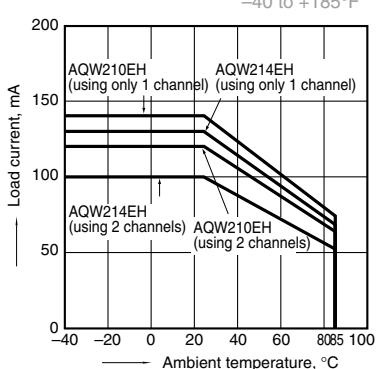


1-(2). Load current vs. ambient temperature characteristics  
Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

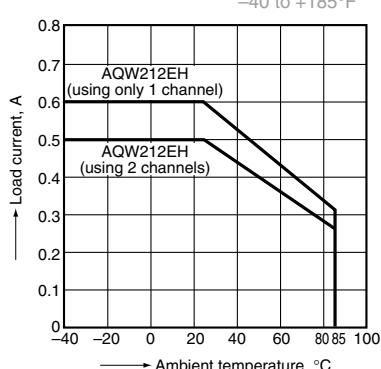


1-(3). Load current vs. ambient temperature characteristics  
Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

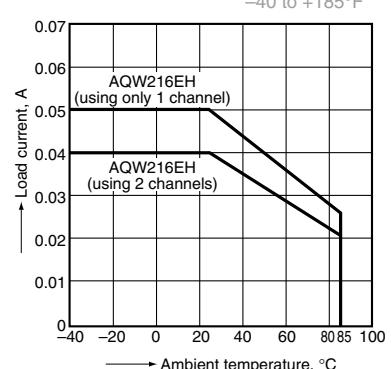


2-(1). On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

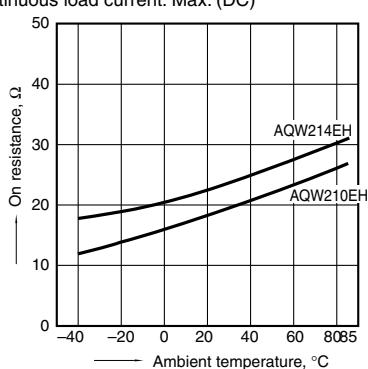


2-(2). On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

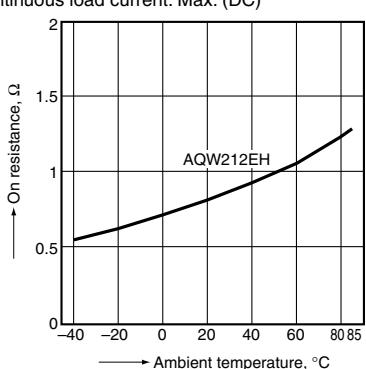


2-(3). On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

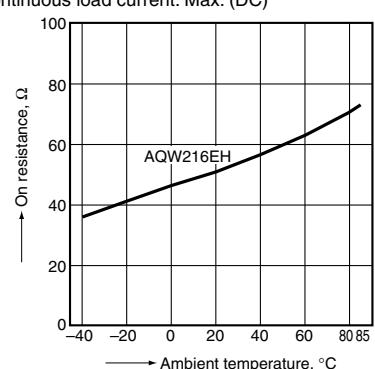


3. Turn on time vs. ambient temperature characteristics  
Sample: All types  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

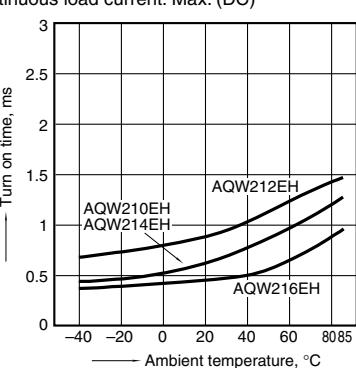


4. Turn off time vs. ambient temperature characteristics  
Sample: All types  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

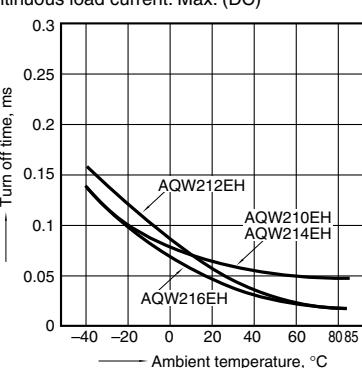


5. LED operate current vs. ambient temperature characteristics  
Sample: All types; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

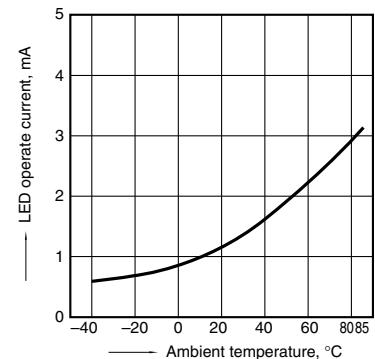


6. LED turn off current vs. ambient temperature characteristics  
Sample: All types; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

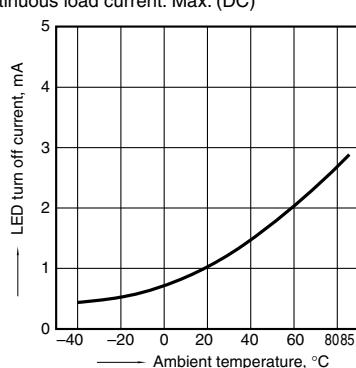

7. LED dropout voltage vs. ambient temperature characteristics  
Sample: All types; LED current: 5 to 50 mA

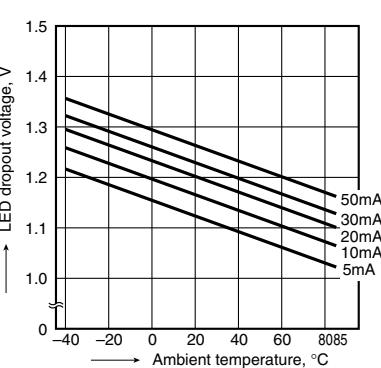


8-(1). Current vs. voltage characteristics of output at MOS portion  
Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

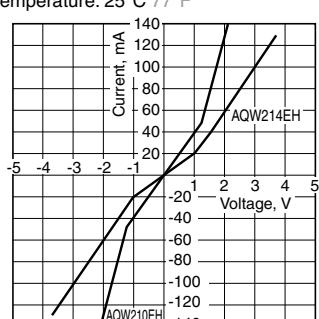

# GE 2 Form A (AQW21OEH)


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

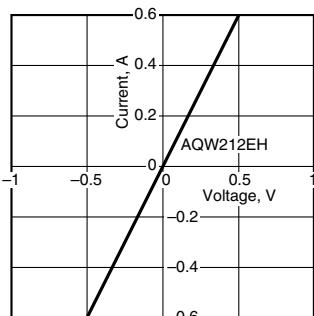


8-(3). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

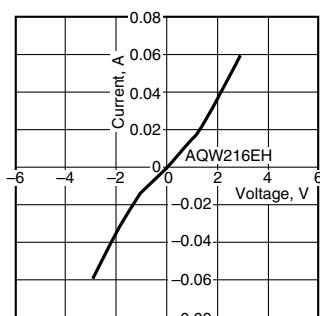


9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

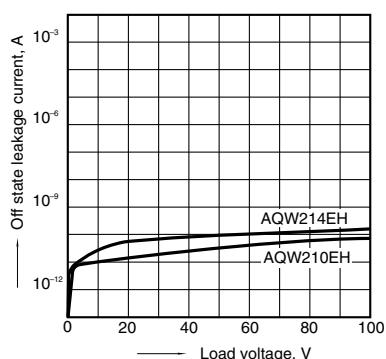

9-(2). Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

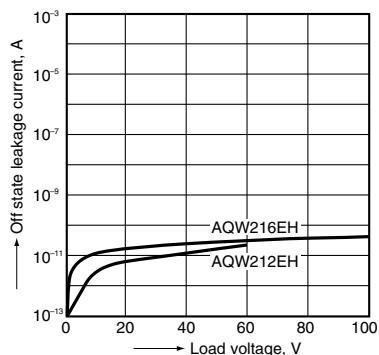

10. Turn on time vs. LED forward current characteristics

Sample: All types


Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

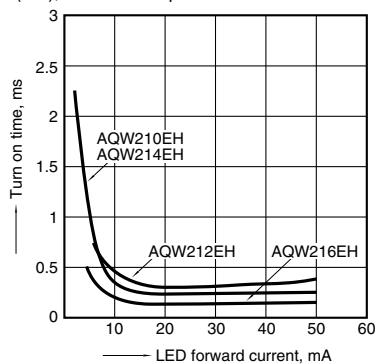

11. Turn off time vs. LED forward current characteristics


Sample: All types

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

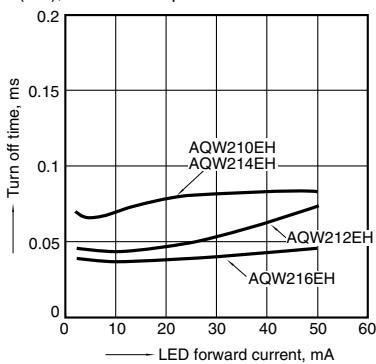


12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

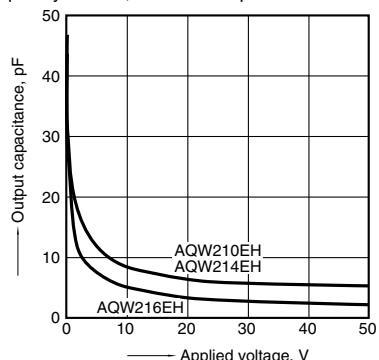

12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

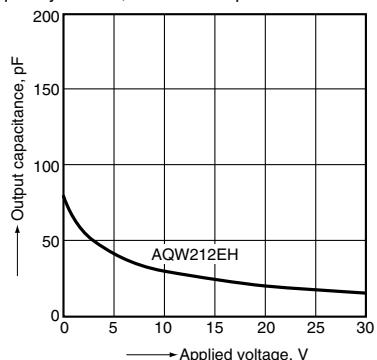

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Solid State Relays - PCB Mount category:***

***Click to view products by Panasonic manufacturer:***

Other Similar products are found below :

[M86F-2W](#) [M90F-2W](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [G3CN-202PL-3-US DC12](#) [G3CN-203P DC3-28](#)  
[G3RDX02SNUSDC12](#) [PLA134S](#) [DMP6202A](#) [DS11-1005](#) [AQ3A2-ZT432VDC](#) [AQV212J](#) [AQV214SD02](#) [AQV252GAJ](#) [AQW414EA](#)  
[AQY221R2SJ](#) [EFR1200480A150](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQV212AJ](#) [AQV238AD01](#) [AQV252GAXJ](#) [AQW414TS](#)  
[AQY210SXT](#) [AQY212ST](#) [AQY221N2V1YJ](#) [AQY275AXJ](#) [G2-1A02-ST](#) [G2-1A02-TT](#) [G2-1A03-ST](#) [G2-1A03-TT](#) [G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [G3M-203PL-UTU-1 DC24](#)  
[CPC2330N](#) [3-1617776-2](#) [CTA2425](#) [TS190](#) [LBB110S](#)