

CR123A

LITHIUM MANGANESE DIOXIDE




Features & Benefits

- Operating temperature range between -40°C to $+70^{\circ}\text{C}$
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability


Specifications

Nominal Capacity:	1550 mAh
Nominal Voltage:	3V
Weight:	Approximately 17g
Operating Temperature:	-40°C - $+70^{\circ}\text{C}$

Dimensions

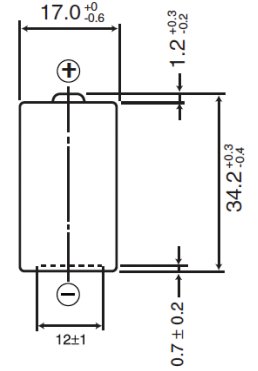


Temperature Characteristics

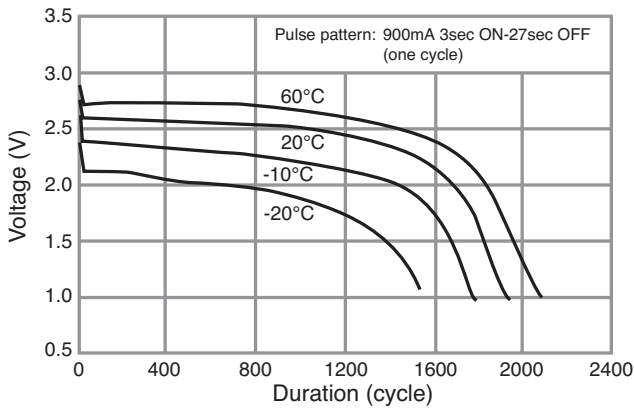


*Please consult Panasonic for use below and above -20°C to $+60^{\circ}\text{C}$


Continuous Discharge Characteristics (60°C)

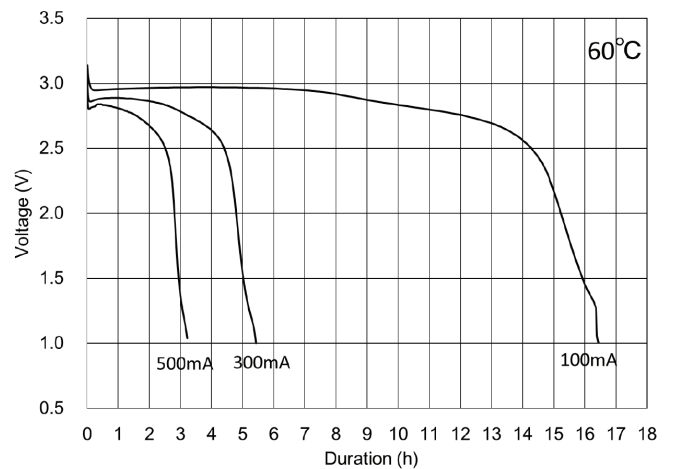

Continuous Discharge Characteristics (20°C)

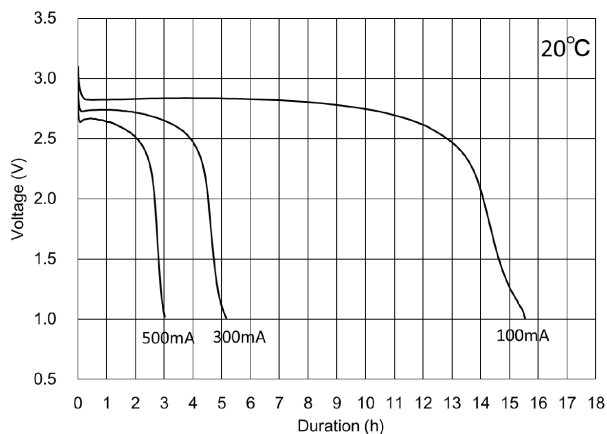

Continuous Discharge Characteristics (-20°C)

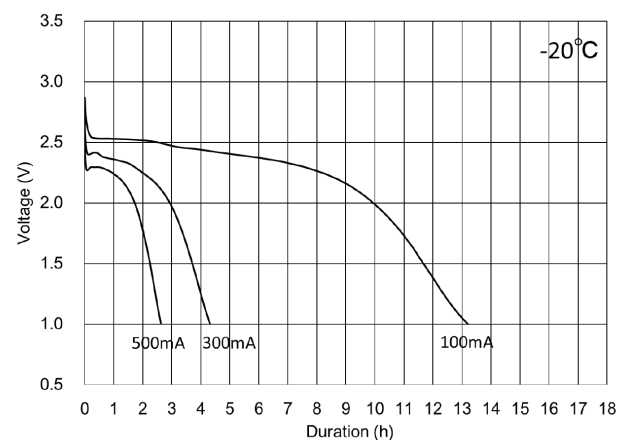

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Consumer Battery & Photo Battery category](#):

Click to view products by [Panasonic manufacturer](#):

Other Similar products are found below :

[6LR61AD/B](#) [2909830](#) [CR-2PA/1B](#) [CR-2PE/BN](#) [CR-123APA/1B](#) [LR6XWA/3SB](#) [MN1300](#) [LR14XWA/BB](#) [LR20XWA/B](#) [MN1604](#)
[MN2400](#) [LR03XWA/B](#) [LR14XWA/B](#) [LR6XWA/B](#)