

CR2

# LITHIUM MANGANESE DIOXIDE



### Features & Benefits


- Operating temperature range between -40° C to +70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

### Specifications


|                        |                   |
|------------------------|-------------------|
| Nominal Capacity:      | 850 mAh           |
| Nominal Voltage:       | 3V                |
| Weight:                | Approximately 11g |
| Operating Temperature: | -40°C - +70°C*    |

\*Please consult Panasonic for use below and above -20°C to +60°C

### Dimensions

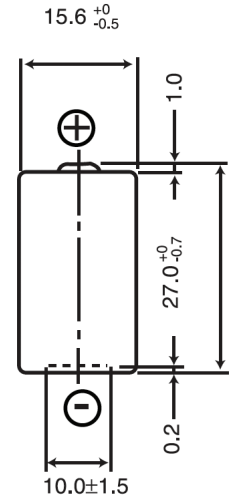


### Temperature Characteristics

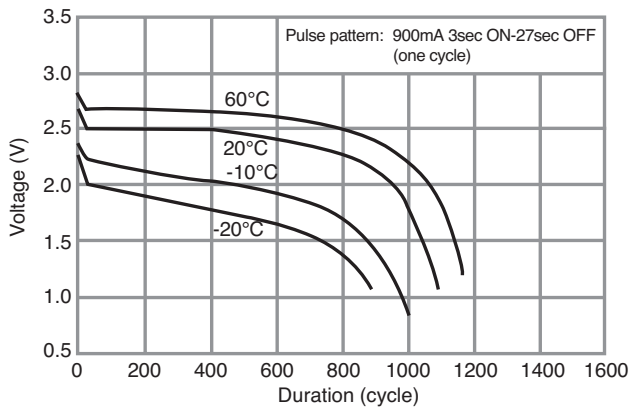


\*Please consult Panasonic for use below and above -20°C to +60°C


### Continuous Discharge Characteristics (60°C)

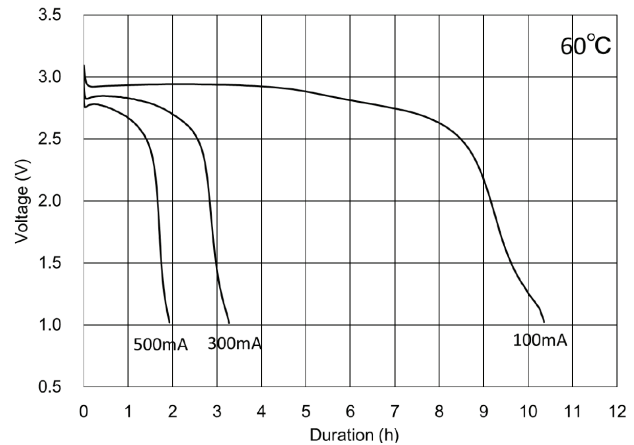

### Continuous Discharge Characteristics (20°C)

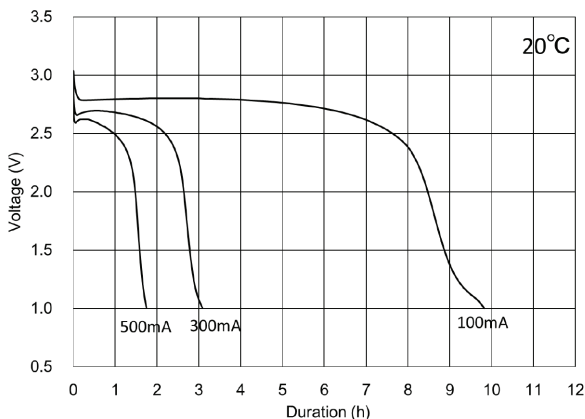

### Continuous Discharge Characteristics (-20°C)

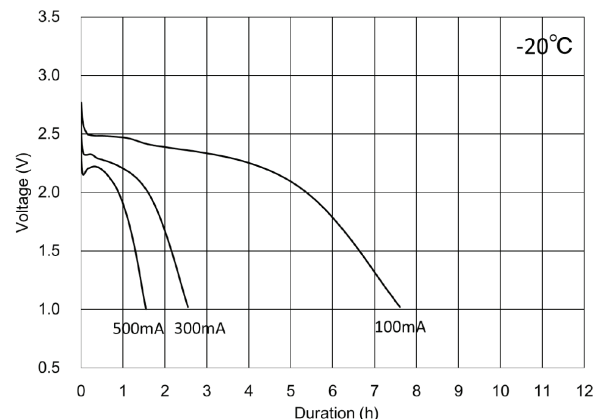

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Consumer Battery & Photo Battery](#) category:*

*Click to view products by [Panasonic](#) manufacturer:*

Other Similar products are found below :

[6LR61AD/B](#) [CR-2PA/1B](#) [CR-123APA/1B](#) [LR20XWA/B12](#) [LR14XWA/B12](#) [LR20XWA/B](#) [LR03XWA/B2](#) [LR6XWA/3SB](#)

[6LF22XWA/B12](#) [6LF22XWA/B](#) [LR03XWA/B](#) [LR03XWA/B24](#) [LR14XWA/B](#) [LR6XWA/B](#) [LR6XWA/B2](#) [LR6XWA/B24](#)