LITHIUM MANGANESE DIOXIDE



Features & Benefits

- Operating temperature range between -40° C to +-70° C
- · High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

Specifications


Nominal Capacity: 1400 mAh

Nominal Voltage: 6V


Weight: Approximately 37g Operating Temperature: $-40^{\circ}\text{C} - +70^{\circ}\text{C}^{*}$

*Please consult Panasonic for use below and above -20°C to +60°C

Dimensions



Temperature Characteristics

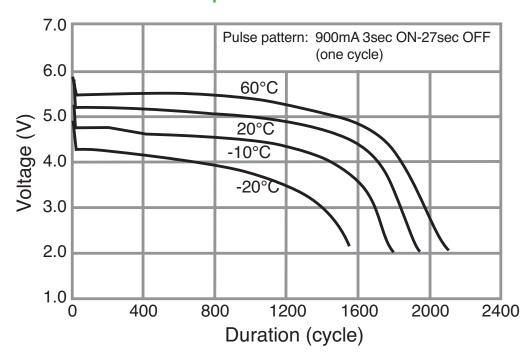

*Please consult Panasonic for use below and above -20°C to +60°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Consumer Battery & Photo Battery category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below:

<u>6LR61AD/B</u> <u>2909830 CR-2PA/1B CR-2PE/BN CR-123APA/1B LR6XWA/3SB MN1300 LR14XWA/BB LR20XWA/B MN1604 MN2400 LR03XWA/B LR14XWA/B LR6XWA/B</u>