

Compliant with European standards 1a1b 10A/8A polarized power relays

DE RELAYS (ADE)



RoHS compliant


FEATURES

- 1. Conforms to European safety standard (VDE0700 and VDE0631).**
Insulating distance between coil and contacts:
Clearance Min. 8mm .315 inch
Creepage Min. 8mm .315 inch
- 2. Low operating power**
Nominal operating power at 200 mW (Single side stable, 2 coil latching)
- 3. Compact body saves space**
Size: 12.5(W) × 25(L) × 12.5(H) mm
.492(W) × .984(L) × .492(H) inch
- 4. Conforms to the various safety standards**
UL, CSA and VDE approved

TYPICAL APPLICATIONS

1. Temperature controller
2. Automatic meter reading
3. OA equipment
4. FA equipment

ORDERING INFORMATION

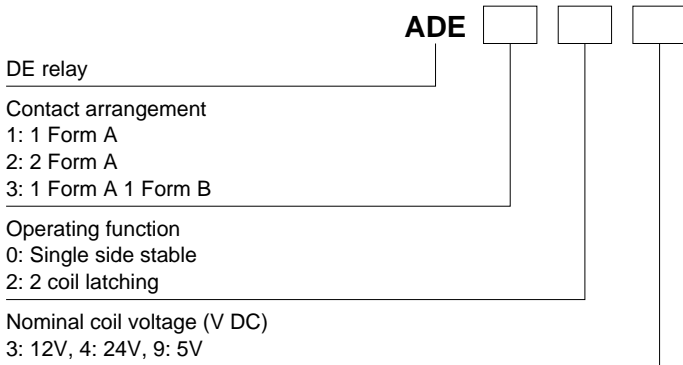

Notes: 1. Certified by UL, CSA and VDE
2. This product is manufactured by lot after an order is received.

TYPES

Contact arrangement	Nominal coil voltage	Single side stable type	2 coil latching type
		Part No.	Part No.
1 Form A	5V DC	ADE109	ADE129
	12V DC	ADE103	ADE123
	24V DC	ADE104	ADE124
1 Form A 1 Form B	5V DC	ADE309	ADE329
	12V DC	ADE303	ADE323
	24V DC	ADE304	ADE324
2 Form A	5V DC	ADE209	ADE229
	12V DC	ADE203	ADE223
	24V DC	ADE204	ADE224

Standard packing: Tube package: 20 pcs.; Case: 500 pcs.
Note: This product is manufactured by lot after an order is received.

RATING

1. Coil data

1) Single side stable type

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5V DC	70%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	40 mA	125Ω	200mW	130%V of nominal voltage
12V DC			16.6mA	720Ω		
24V DC			8.3mA	2,880Ω		

2) 2 coil latching type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)		Coil resistance [±10%] (at 20°C 68°F)		Nominal operating power		Max. applied voltage (at 20°C 68°F)
			Set coil	Reset coil	Set coil	Reset coil	Set coil	Reset coil	
5V DC	70%V or less of nominal voltage (Initial)	70%V or less of nominal voltage (Initial)	40 mA	40 mA	125Ω	125Ω	200mW	200mW	130%V of nominal voltage
12V DC			16.6mA	16.6mA	720Ω	720Ω			
24V DC			8.3mA	8.3mA	2,880Ω	2,880Ω			

2. Specifications

Characteristics	Item	Specifications	
Contact	Arrangement	1 Form A 1 Form A 1 Form B 2 Form A	
	Contact resistance (Initial)	Max. 30 mΩ (By voltage drop 6 V DC 1A)	
	Contact material	AgSnO ₂ type	
Rating	Nominal switching capacity (resistive load)	10A 250V AC, 10A 30V DC 8A 250V AC, 8A 30V DC	
	Max. switching power (resistive load)	2,500VA, 300W 2,000VA, 240W	
	Max. switching voltage	250V AC, 30V DC 250V AC, 30V DC	
	Max. switching current	10A 8A	
	Nominal operating power	200mW	
	Min. switching capacity*1	100mA 5V DC	
Electrical characteristics	Insulation resistance (Initial)	Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	1,000 Vrms for 1 min. (Detection current: 10 mA)
		Between contact sets	— 4,000 Vrms for 1 min. (Detection current: 10 mA)
		Between contact and coil	5,000 Vrms for 1 min. (Detection current: 10 mA)
	Surge breakdown voltage*2 (Between contact and coil) (Initial)	12,000 V	
	Temperature rise (coil) (at 70°C 158°F)	Max. 50°C 122°F (By resistive method)	
	Operate time [Set time] (at 20°C 68°F)	Max. 10 ms [Max. 10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)	
Release time [Reset time] (at 20°C 68°F)	Max. 5 ms [Max. 10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode)		
Mechanical characteristics	Shock resistance	Functional	Min. 196 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)
		Destructive	Min. 980 m/s ² (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 2 mm (Detection time: 10μs.)
Destructive		10 to 55 Hz at double amplitude of 3 mm	
Expected life	Mechanical	Min. 10 ⁷ (at 300 times/min.)	
	Electrical	Min. 10 ⁵ (resistive load, at 20 times/min., at nominal switching capacity) Min. 10 ⁵ (resistive load, at 20 times/min., at AC nominal switching capacity) Min. 5×10 ⁴ (resistive load, at 20 times/min., at DC nominal switching capacity)	
Conditions	Conditions for operation, transport and storage*3	Ambient temperature: -40°C to +70°C -40°F to +158°F; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed	20 times/min. (at nominal switching capacity)	
Unit weight		Approx. 7 g .25 oz	


Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981


*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.

REFERENCE DATA


1.-(1) Maximum switching power (1 Form A)

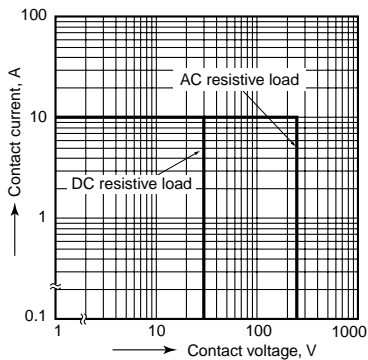


1.-(2) Maximum switching power (1 Form A 1 Form B, 2 Form A)

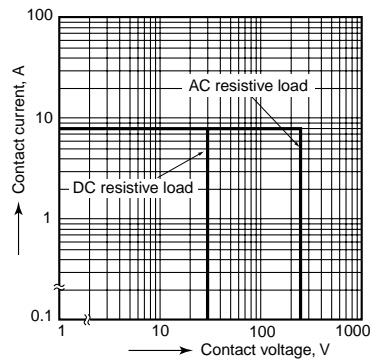


2.-(1) Life curve (1 Form A)

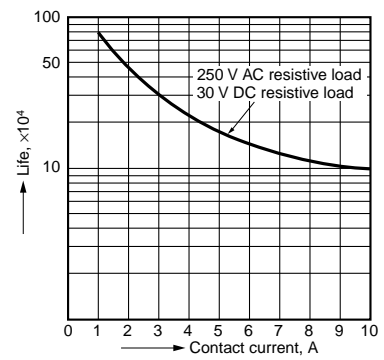

2.-(2) Life curve (1 Form A 1 Form B)

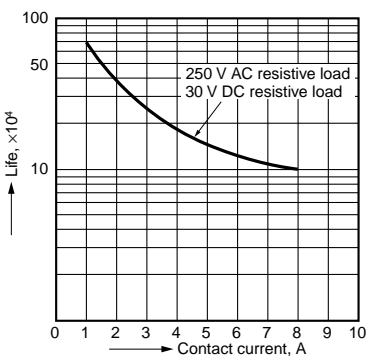


2.-(3) Life curve (2 Form A)

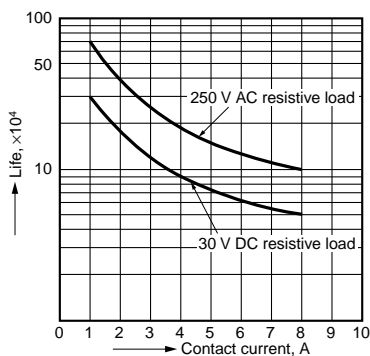


3.-(1) Coil temperature rise (1 Form A)

Tested sample: ADE109
Quantity: n=6
Ambient temperature: 25°C to 70°C 77°F to 158°F

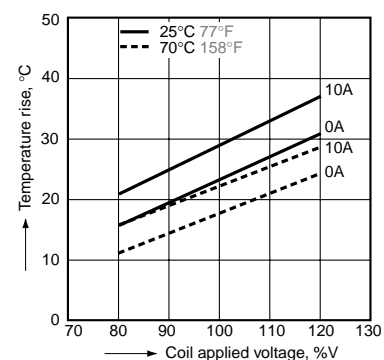


3.-(2) Coil temperature rise (1 Form A 1 Form B)

Tested sample: ADE309
Quantity: n=6
Ambient temperature: 25°C to 70°C 77°F to 158°F

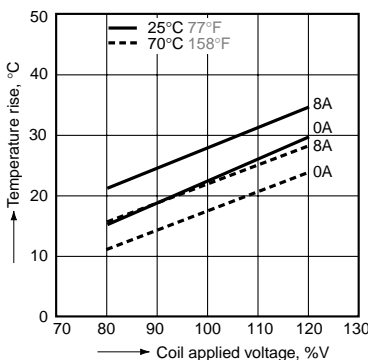


3.-(3) Coil temperature rise (2 Form A)

Tested sample: ADE209
Quantity: n=6
Ambient temperature: 25°C to 70°C 77°F to 158°F

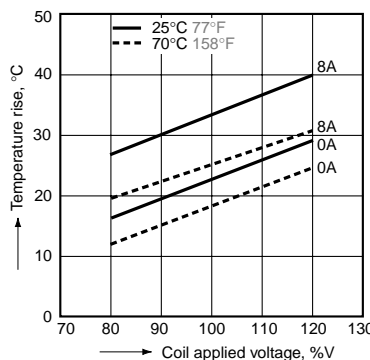


4.-(1) Operate/release time (1 Form A)

Tested sample: ADE109
Quantity: n=5

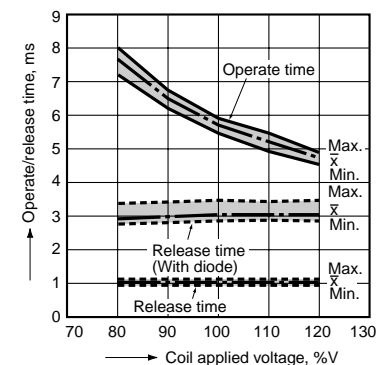


4.-(2) Operate/release time (1 Form A 1 Form B)

Tested sample: ADE309, Quantity: n=5

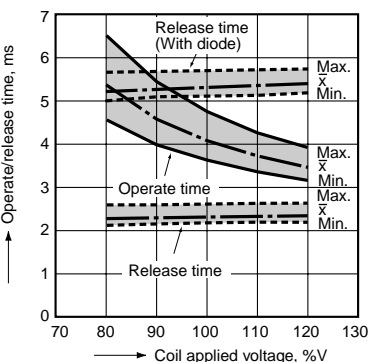


4.-(3) Operate/release time (2 Form A)

Tested sample: ADE209, Quantity: n=5

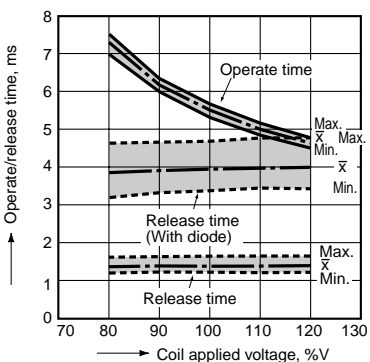


5.-(1) Ambient temperature characteristics (1 Form A)

Tested sample: ADE109, Ambient temperature: -40°C to 80°C -40°F to 176°F, Quantity: n=6




5.-(2) Ambient temperature characteristics
(1 Form A 1 Form B)

Tested sample: ADE309, Ambient temperature:
-40°C to 80°C -40°F to 176°F, Quantity: n=6



5.-(3) Ambient temperature characteristics
(2 Form A)

Tested sample: ADE209, Ambient temperature:
-40°C to 80°C -40°F to 176°F, Quantity: n=6




DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>


CAD Data



External dimensions
Single side stable

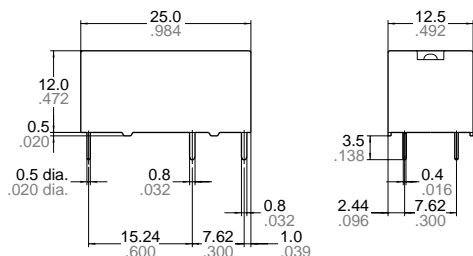


2 coil latching type

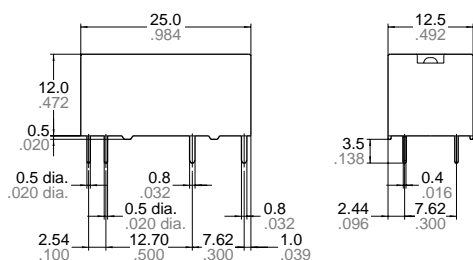


Tolerance: $\pm 0.3 \pm 0.12$

PC board pattern (Bottom view)
Single side stable 2 coil latching type

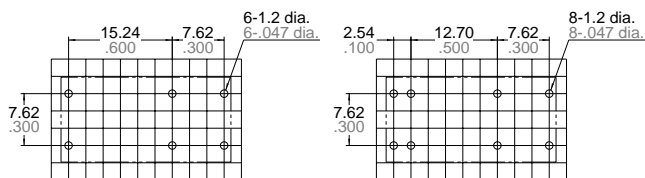

Tolerance : $\pm 0.1 \pm 0.04$

Schematic (Bottom view)

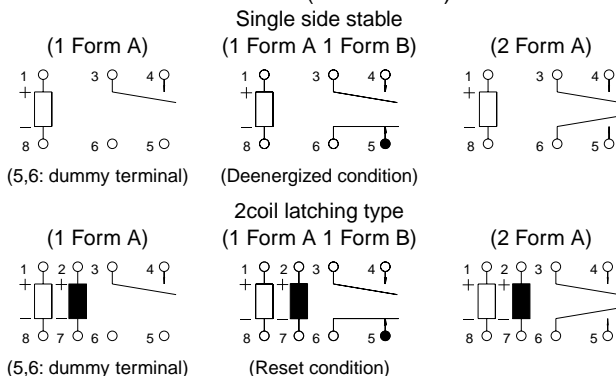

SAFETY STANDARDS

Item	UL/C-UL (Recognized)		CSA (Certified)		VDE (Certified)	
	File No.	Contact rating	File No.	Contact rating	File No.	Contact rating
1 Form A	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC (cosφ=1.0)
1 Form A 1 Form B	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC (cosφ=1.0)
2 Form A	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC (cosφ=1.0)

For Cautions for Use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)