

Multilayer Ceramic Capacitors (Low Profile Type)

Series: **ECJ**



■ Features

- Low profile/height with high capacitance values
- For small and thin electronic equipment
- RoHS compliant

■ Recommended Applications

- For slim type HDD, DVD drive, LCD circuit


■ Handling Precautions

See Page 48 to 53


■ Packaging Specifications

See Page 45, 46, 56

■ Explanation of Part Numbers

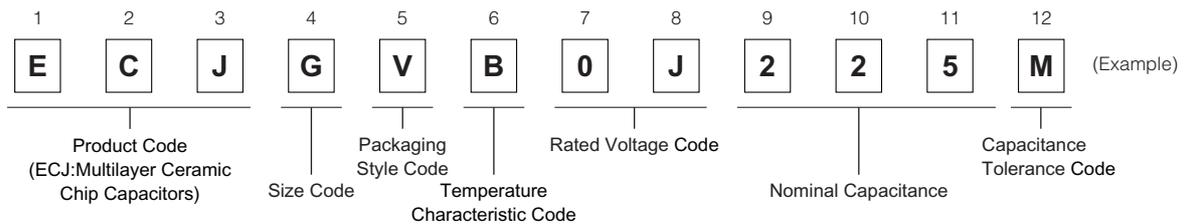


■ Construction

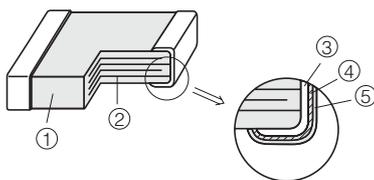

| No | Name | |
|----|-----------------------|------------------------|
| ① | Ceramic dielectric | |
| ② | Internal electrode | |
| ③ | Terminal electrode | Substrate electrode |
| ④ | | Intermediate electrode |
| ⑤ | | External electrode |

■ Dimensions in mm (not to scale)

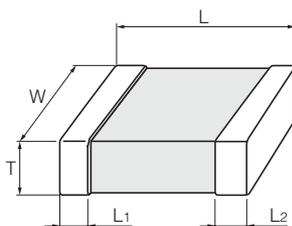

| Size Code | Size (EIA) | L | W | T | L ₁ , L ₂ |
|-----------|------------|-----------|-----------|-----------|---------------------------------|
| B | 0603 | 1.6±0.1 | 0.8±0.1 | 0.45±0.05 | 0.3±0.2 |
| G | 0805 | 2.00±0.15 | 1.25±0.15 | 0.85±0.10 | 0.50±0.25 |
| | | 2.0±0.2 | 1.25±0.20 | | |
| H | 1206 | 3.2±0.2 | 1.6±0.2 | 0.85±0.10 | 0.6±0.3 |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2008

■ Packaging Styles and Standard Packaging Quantities

Quantity : pcs. reel

| Packaging Style Code | Size | | 0603 | 0805 | 1206 |
|----------------------|------------------|--------------------------------|--------|--------|--------|
| | Packaging Styles | Thickness (mm) | T=0.45 | T=0.85 | T=0.85 |
| V | φ180 reel | Paper taping (Pitch : 4 mm) | 4,000 | 4,000 | 4,000 |

■ Temperature Characteristics

● Class 2

| Temperature Characteristic Code | Temperature Characteristics | Capacitance Change | Measurement Temperature Range | Reference Temperature |
|---------------------------------|-----------------------------|--------------------|-------------------------------|-----------------------|
| B | X5R | ±15 % | -55 to 85 °C | 25 °C |

■ Rated Voltage

| Rated Voltage Code | 1E | 1C | 1A | 0J |
|--------------------|---------|---------|---------|----------|
| Rated Voltage | DC 25 V | DC 16 V | DC 10 V | DC 6.3 V |

■ Nominal Capacitance

| EX. | 105 | 225 | 475 | 106 |
|---------------------|------------------------|--------------------------|--------------------------|--------------------------|
| Nominal Capacitance | 1,000,000 pF (1 μF) | 2,200,000 pF (2.2 μF) | 4,700,000 pF (4.7 μF) | 10,000,000 pF (10 μF) |

■ Capacitance Tolerance

| Class | Temperature Characteristics | Capacitance Tolerance Code | Capacitance Tolerance |
|-------|-----------------------------|----------------------------|-----------------------|
| 2 | X5R | K | ±10 % |
| | | M | ±20 % |

■ Specifications and Testing Methods

| Item | Specifications | Test Method | | |
|---------------------------------|---|---|----------------|----------------|
| Operating Temperature Range | -55 to 85 °C | — | | |
| Dielectric Withstanding Voltage | No dielectric breakdown and /or damage | Test voltage:Rated voltage x250 % Duration : 1 to 5 s. Charge/discharge current: 50 mA max. | | |
| Insulation Resistance (I.R.) | 500/C (MΩ) min. Note : DC10V, min. ; 100/C (MΩ) min. (C: Nominal capacitance in μF) | Measuring voltage : Rated voltage Duration : 60 ± 5 s Charge/discharge current: 50 mA max. | | |
| Capacitance | Within the specified tolerance | Measuring temperature: 20±2 °C | | |
| Dissipation Factor (tan δ) | 0.2 max. Please see the technical reports for details. | Preconditioning: The capacitors shall be kept in temperature of 150 +0 / -10 °C for 1 hour and subjected to standard condition* 48±4 hours, before initial measurement. | | |
| | | Normal capacitance | C≤10 μF | C>10 μF |
| | | Measuring frequency | 1 kHz ± 10 % | 120 Hz ± 20 % |
| | | Measuring voltage | 1.0 ± 0.2 Vrms | 0.5 ± 0.2 Vrms |

* Standard condition : Temperature 15 to 35 °C, Relative humidity 45 to 75 %
For further information, see the technical specifications.

■ Standard Products for EIA “0603”, Taped Version

- Class 2
- ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

| Rated voltage | | DC 10 V | | | DC 6.3 V | | |
|------------------|-----------------------|--------------|--------|-------------|--------------|--------|-------------|
| Capacitance (μF) | Capacitance Tolerance | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. |
| | | | (mm) | X5R | | (mm) | X5R |
| 1 | ±10 % (K) or | ECJBVB1A105□ | 0.45 | ○ | ECJBVB0J105□ | 0.45 | ○ |
| 2.2 | ±20 % (M) | | | | | | |

□: Capacitance tolerance code : “□” for “K” or “M”

Standard packaging quantity of Packaging Style Code “V” (T = 0.45 mm): 4,000 pcs./reel
Avoid flow soldering.

■ Standard Products for EIA “0805”, Taped Version

- Class 2
- ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

| Rated voltage | | DC 25 V | | | DC 16 V | | | DC 10 V | | | DC 6.3 V | | | | | | |
|------------------|-----------------------|--------------|--------|-------------|--------------|--------|-------------|--------------|--------|-------------|----------|--------------|-------------|---|--------------|-------|---|
| Capacitance (μF) | Capacitance Tolerance | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | | | | |
| | | | (mm) | X5R | | (mm) | X5R | | (mm) | X5R | | (mm) | X5R | | | | |
| 2.2 | ±10 % (K) | ECJGVB1E225□ | 0.85 | ○ | ECJGVB1C225□ | 0.85 | ○ | ECJGVB1A225□ | 0.85 | ○ | | | | | | | |
| 4.7 | or | | | | | | | | | | | ECJGVB1A475□ | 0.85 | ○ | ECJGVB0J475□ | 0.85 | ○ |
| 10 | ±20 % (M) | | | | | | | | | | | ECJGVB1A106□ | 0.85* | ○ | ECJGVB0J106□ | 0.85* | ○ |

□: Capacitance tolerance code : “□” for “K” or “M”

Dimensional tolerance of L, W, T: L/W: ± 0.15 mm / T: ± 0.1 mm for no mark, L/W: ± 0.2 mm / T: ± 0.1 mm for “*” mark
Standard packaging quantity of Packaging Style Code “V” (T = 0.85 mm): 4,000 pcs./reel
Avoid flow soldering.

■ Standard Products for EIA “1206”, Taped Version

- Class 2
- ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

| Rated voltage | | DC 25 V | | | DC 16 V | | | DC 10 V | | | DC 6.3 V | | | | |
|------------------|-----------------------|--------------|--------|-------------|--------------|--------|-------------|--------------|--------|-------------|--------------|--------|-------------|--------------|------|
| Capacitance (μF) | Capacitance Tolerance | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | Part No. | Dim. T | Temp. Char. | | |
| | | | (mm) | X5R | | |
| 4.7 | ±10 % (K) | ECJHVB1E475M | 0.85 | ○ | ECJHVB1C475M | 0.85 | ○ | | | | | | | | |
| 10 | or | | | | | | | ECJHVB1C106□ | 0.85 | ○ | | | | | |
| 22 | ±20 % (M) | | | | | | | | | | ECJHVB1A226M | 0.85 | ○ | ECJHVB0J226M | 0.85 |

□: Capacitance tolerance code : “□” for “K” or “M”

Standard packaging quantity of Packaging Style Code “V” (T = 0.85 mm): 4,000 pcs./reel
Avoid flow soldering.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panasonic](#) manufacturer:

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELC-09D151F](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-H-DC12V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HL2-H-DC110V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC4-H-AC24V](#) [HC4-H-AC120V](#) [HC4-H-DC12V](#) [AZH2031](#) [RP-SDMF64DA1](#) [EVM-F6SA00B55](#) [RP-SMLE08DA1](#) [ERZ-V20R391](#) [ELL-ATV681M](#) [ERZ-V05V680CB](#) [LT4H-DC24V](#) [LT4HL8-AC24V](#) [LT4HW-AC24V](#) [LT4HWT8-AC240V](#) [LT4HWT-AC240VS](#) [CY-122A-P](#) [ETQ-P5M470YFM](#) [EVAL_PAN1555](#) [EVQ-PAE04M](#) [EX-14B](#) [EX-22B-PN](#) [EX-31A-C5](#) [EXB-24N121JX](#) [MC-NA40-4](#) [EX-F72-PN](#) [EX-L211](#) [EYG-A121803V](#) [MFMCA0030AEB](#) [FCR-M50-AC208V](#) [FC-SFBH-20](#) [FC-SFBH-24](#) [FD-F8Y](#) [MHMA102A1C](#) [MHMD022S1S](#) [MHMD041S1S](#) [MHMD042G1T](#) [MHMD082G1T](#) [FD-S9](#)