

## Stacked Metallized Plastic Film Capacitor

Type: **ECQV(L)/(M)**

Designed for high density insertion applications.


### ■ Features

- Small size and large capacitance
- Excellent electric characteristics in non-inductive construction
- Wide range for automatic insertion
- RoHS directive compliant

### ■ Recommended Applications

- General purpose
- Noise suppression for logic circuit

### ■ Explanation of Part Numbers

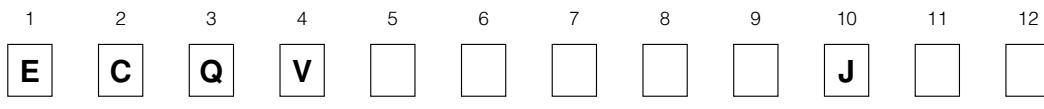

Product code

Dielectric & construction

Rated voltage

1H	50 VDC
1J	63 VDC
1	100 VDC

Capacitance

L	50 VDC
	63 VDC
M	100 VDC

Cap. Tol.

Suffix


Suffix	Lead Form
Blank	Straight
W	Crimped lead
A	Cut lead
2	Straight taping ( Ammo )
3	Crimped taping ( Ammo )

### ■ Specifications

Category temp. range (Including temperature-rise on unit surface)	-40 °C to +105 °C
Rated voltage	50 VDC, 63 VDC, 100 VDC (Derating of rated voltage by 2.5 %/°C at more than 85 °C)
Capacitance range	0.010 μF to 2.2 μF
Capacitance tolerance	± 5 % (J)
Dissipation factor (tan δ)	tan δ ≤ 1.0 % (20 °C, 1 kHz)
Withstand voltage	Between terminals : Rated volt. (VDC) × 150 % 60 s
Insulation resistance (IR)	C ≤ 0.33 μF : IR ≥ 3000 MΩ C > 0.33 μF : IR ≥ 1000 MΩ · μF (20 °C, 50 VDC, 60 s ECQV1H, ECQV1J) (20 °C, 100 VDC, 60 s ECQV1)

\* In case of applying voltage in alternating current (50 Hz or 60 Hz sine wave) to a capacitor with DC rated voltage, please refer to the page of "Permissible voltage (R.M.S) in alternating current corresponding to DC rated voltage".

### ■ Dimensions in mm (not to scale)

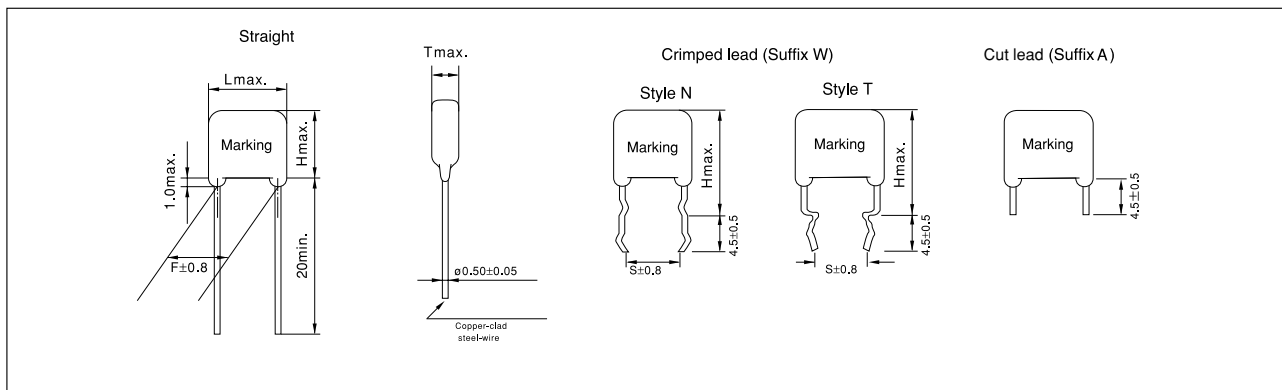

### ■ Packaging Specifications for Bulk Package


Packing quantity: 100 pcs./bag

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.



### ■ Taping Specifications for Automatic Insertion

#### ● Taping style

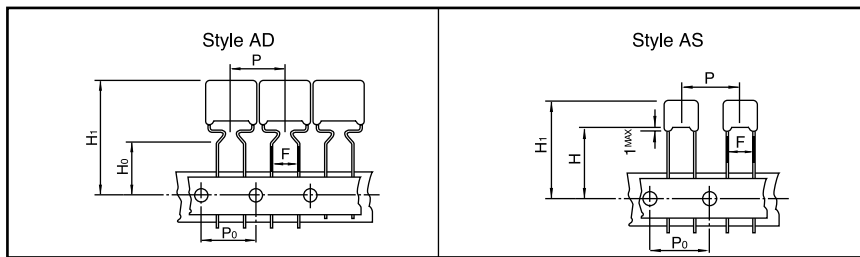

\* Refer to the page of taping specifications.

#### ● Packaging Specifications

Type	Rated volt.	Cap. range (μF)	Taping style						Packing	suffix
			AD	AS	B	C	D	E		
ECQV (L)	50 VDC	0.010 to 2.2	○						Ammo	JL3
		0.010 to 1.0		○					Ammo	JL2
ECQV (M)	63 VDC	0.010 to 1.0	○						Ammo	JM3
		0.010 to 0.15		○					Ammo	JM2
	100 VDC	0.010 to 0.47	○						Ammo	JM3
		0.010 to 0.10		○					Ammo	JM2

#### ● Lead Spacing

Style	Lead Spacing
AD	5.0 mm
AS	5.0 mm

\* See the column "Rating, Dimensions & Quantity Box" for packing quantity.

### ■ Rating, Dimensions & Quantity/Ammo Box or Reel

#### ● Type ECQV(L) Rated voltage : 50 VDC

Part No.	Cap. (μF)	Dimensions (mm)								Min. order Q'ty		
		L <sub>max.</sub>	T <sub>max.</sub>	H <sub>max.</sub>		F		S		ød	Taping	Bulk
				Straight	Crimped lead	Straight	Crimped lead	Straight	Crimped lead			
ECQV1H103JL( )	0.010	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0	2000		
ECQV1H123JL( )	0.012	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H153JL( )	0.015	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H183JL( )	0.018	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H223JL( )	0.022	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H273JL( )	0.027	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H333JL( )	0.033	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H393JL( )	0.039	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H473JL( )	0.047	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H563JL( )	0.056	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H683JL( )	0.068	7.3	3.2	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H823JL( )	0.082	7.3	3.6	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H104JL( )	0.10	7.3	4.0	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H124JL( )	0.12	7.3	4.0	5.0	9.0	5.0	5.0	5.0	5.0			
ECQV1H154JL( )	0.15	7.3	4.4	5.5	9.5	5.0	5.0	5.0	5.0			
ECQV1H184JL( )	0.18	7.3	4.5	5.5	9.5	5.0	5.0	5.0	5.0			
ECQV1H224JL( )	0.22	7.3	4.8	5.5	9.5	5.0	5.0	5.0	5.0			
ECQV1H274JL( )	0.27	7.3	4.6	7.0	11.0	5.0	5.0	5.0	5.0			
ECQV1H334JL( )	0.33	7.3	5.2	7.0	11.0	5.0	5.0	5.0	5.0			
ECQV1H394JL( )	0.39	7.3	5.7	7.3	11.3	5.0	5.0	5.0	5.0			
ECQV1H474JL( )	0.47	7.3	6.0	7.3	11.3	5.0	5.0	5.0	5.0			
ECQV1H564JL( )	0.56	7.3	5.8	10.0	14.0	5.0	5.0	5.0	5.0			
ECQV1H684JL( )	0.68	7.3	6.5	10.0	14.0	5.0	5.0	5.0	5.0			
ECQV1H824JL( )	0.82	7.3	6.8	10.0	14.0	5.0	5.0	5.0	5.0			
ECQV1H105JL( )	1.0	7.3	8.0	11.0	15.0	5.0	5.0	5.0	5.0			
ECQV1H125JL( )	1.2	10.2	6.5	10.0	14.0	7.5	5.0	5.0	5.0			
ECQV1H155JL( )	1.5	10.2	7.2	10.0	14.0	7.5	5.0	5.0	5.0			
ECQV1H185JL( )	1.8	10.2	7.2	12.0	16.5	7.5	5.0	5.0	5.0			
ECQV1H225JL( )	2.2	10.2	7.9	12.0	16.5	7.5	5.0	5.0	5.0			

↑ Suffix for lead crimped or taped type

Style N: 0.010 μF to 1.0 μF  
Style T: 1.2 μF to 2.2 μF

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

- Rating, Dimensions & Quantity/Ammo Box or Reel
- Type ECQV(M) Rated voltage : 63 VDC

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)							Min. order Q'ty		
		L <sup>max.</sup>	T <sup>max.</sup>	H <sup>max.</sup>		F		S	$\phi$ d	Taping	Bulk
				Straight	Crimped lead	Straight	Crimped lead				
ECQV1J103JM( )	0.010	7.5	3.2	6.8	10.8	5.0	5.0	0.50	2000	500	
ECQV1J123JM( )	0.012	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J153JM( )	0.015	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J183JM( )	0.018	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J223JM( )	0.022	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J273JM( )	0.027	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J333JM( )	0.033	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J393JM( )	0.039	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J473JM( )	0.047	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J563JM( )	0.056	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J683JM( )	0.068	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J823JM( )	0.082	7.5	3.2	6.8	10.8	5.0	5.0	0.50			
ECQV1J104JM( )	0.10	7.5	3.2	7.0	11.0	5.0	5.0	0.50			
ECQV1J124JM( )	0.12	7.5	3.8	7.0	11.0	5.0	5.0	0.50			
ECQV1J154JM( )	0.15	7.5	4.1	7.0	11.0	5.0	5.0	0.50			
ECQV1J184JM( )	0.18	10.2	3.5	9.0	14.0	7.5	5.0	0.50			
ECQV1J224JM( )	0.22	10.2	3.5	9.0	14.0	7.5	5.0	0.50			
ECQV1J274JM( )	0.27	10.2	3.5	9.0	14.0	7.5	5.0	0.50			
ECQV1J334JM( )	0.33	10.2	3.8	9.0	14.0	7.5	5.0	0.50			
ECQV1J394JM( )	0.39	10.2	4.0	9.0	14.0	7.5	5.0	0.50			
ECQV1J474JM( )	0.47	10.2	4.5	9.0	14.0	7.5	5.0	0.50			
ECQV1J564JM( )	0.56	10.2	4.9	9.0	14.0	7.5	5.0	0.50			
ECQV1J684JM( )	0.68	10.2	5.5	10.0	15.0	7.5	5.0	0.50			
ECQV1J824JM( )	0.82	10.2	6.1	10.0	15.0	7.5	5.0	0.50			
ECQV1J105JM( )	1.0	10.2	6.9	10.0	15.0	7.5	5.0	0.50			

Style N: 0.010  $\mu$ F to 0.15  $\mu$ F  
 Style T: 0.18  $\mu$ F to 1.0  $\mu$ F

- Type ECQV(M) Rated voltage : 100 VDC

Part No.	Cap. ( $\mu$ F)	Dimensions (mm)							Min. order Q'ty		
		L <sup>max.</sup>	T <sup>max.</sup>	H <sup>max.</sup>		F		S	$\phi$ d	Taping	Bulk
				Straight	Crimped lead	Straight	Crimped lead				
ECQV1103JM( )	0.010	7.5	3.2	7.0	12.0	5.0	5.0	0.50	2000	500	
ECQV1123JM( )	0.012	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1153JM( )	0.015	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1183JM( )	0.018	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1223JM( )	0.022	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1273JM( )	0.027	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1333JM( )	0.033	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1393JM( )	0.039	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1473JM( )	0.047	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1563JM( )	0.056	7.5	3.2	7.0	12.0	5.0	5.0	0.50			
ECQV1683JM( )	0.068	7.5	4.0	7.0	12.0	5.0	5.0	0.50			
ECQV1823JM( )	0.082	7.5	4.1	7.0	12.0	5.0	5.0	0.50			
ECQV1104JM( )	0.10	7.5	4.5	7.0	12.0	5.0	5.0	0.50			
ECQV1124JM( )	0.12	10.2	3.3	9.0	14.0	7.5	5.0	0.50			
ECQV1154JM( )	0.15	10.2	3.3	9.0	14.0	7.5	5.0	0.50			
ECQV1184JM( )	0.18	10.2	3.6	9.0	14.0	7.5	5.0	0.50			
ECQV1224JM( )	0.22	10.2	4.0	9.0	14.0	7.5	5.0	0.50			
ECQV1274JM( )	0.27	10.2	4.2	9.0	14.0	7.5	5.0	0.50			
ECQV1334JM( )	0.33	10.2	4.8	10.0	15.0	7.5	5.0	0.50			
ECQV1394JM( )	0.39	10.2	5.5	10.0	15.0	7.5	5.0	0.50			
ECQV1474JM( )	0.47	10.2	6.8	10.5	15.5	7.5	5.0	0.50			

↑ Suffix for lead crimped or taped type

Style N: 0.010  $\mu$ F to 0.10  $\mu$ F  
 Style T: 0.12  $\mu$ F to 0.47  $\mu$ F

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

Stacked Metallized Film

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Panasonic](#) manufacturer:*

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELK-EA102FA](#) [ELC-09D151F](#) [EEC-S0HD224H](#) [ELL-5PS3R3N](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC3-HL-AC120V-F](#) [HC4-H-AC120V](#) [AMV9003](#) [EEC-RG0V155H](#) [AZH2031](#) [RP-SDMF64DA1](#) [RP-SDMF32DA1](#) [EEF-UD0K101R](#) [RP-SMLE08DA1](#) [EVM-F6SA00B55](#) [ELC-12D101E](#) [ERA-3YEB272V](#) [EEC-RF0V684](#) [ERA-3YEB153V](#) [ELC-3FN2R2N](#) [ERA-3YEB512V](#) [ERJ-1GEJ564C](#) [ERZ-V20R391](#) [ELL-6RH221M](#) [ETQ-P3W3R3WFN](#) [ELL-ATV681M](#) [ELL-VGG4R7N](#) [EEF-UD0J101R](#) [ECQ-U2A474ML](#) [LC-R121R3P](#) [ELK-EA100FA](#) [EVP-AKB11A](#) [ECQ-U2A154ML](#) [ELK-E101FA](#) [ERA-3YEB303V](#) [ERA-V15J100V](#) [ERZ-V05V680CB](#) [EEF-UE0K101R](#) [EEC-S0HD224V](#) [EVQ-PAC05R](#) [EVQ-PAG04M](#) [ELK-EA222FA](#)