


6 mm Square Long Travel 2 terminals SMD Light Touch Switches

Type: **EVPAS**




■ Features

- External dimensions : 6.0 mm×6.1 mm, Height 5.0 mm (Including the push plate)
- Steady and low contact resistance (100 mΩ max.)
- Excellent solderability (J-bent-type terminals)

■ Recommended Applications

- Operating switches for car electronic equipments.
- Input on operating switches for telephones, electronic musical instruments, etc.

■ Explanation of Part Numbers(Standard specification only)

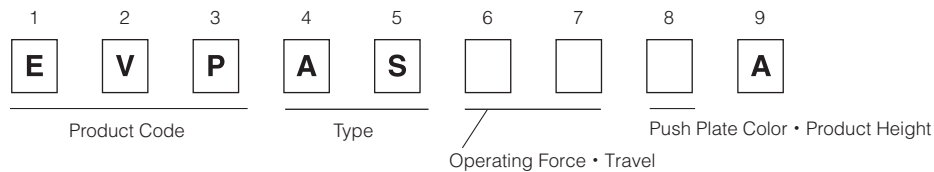

■ Specifications

Type		Snap action/Push-on type SPST		
Electrical	Rating	10 μA 2 V DC to 50 mA 12 V DC (Resistive load)		
	Contact Resistance	100 mΩ max.		
	Insulation Resistance	100 MΩ min. (at 100 V DC)		
	Dielectric Withstanding Voltage	250 V AC for 1 minute		
	Bouncing	10 ms max. (ON, OFF)		
Mechanical	Type	Standard type		Narrow tolerance operating force type
	Operating Force	1.6 N±0.5 N	—	—
		2.0 N±0.6 N	—	—
		—	2.2 N±0.6 N	—
		2.5 N±0.6 N	2.5 N±0.6 N	—
		3.0 N±0.8 N	—	3.0 N±0.6 N
		3.5 N±1.0 N	—	—
Travel	1.3 mm±0.2 mm	1.0 mm±0.2 mm		
Endurance	Operating Life	3.5 N type: 30,000 cycles min. 1.6 N, 2.0 N, 2.2 N, 2.5 N, 3.0 N type: 100,000 cycles min. 3.0 N with Long life type: 200,000 cycles min. 3.5 N with Long life type: 100,000 cycles min. 3.0 N with Narrow tolerance type: 200,000 cycles min.		
Operating Temperature		-40 °C to +90 °C		
Storage Temperature		-40 °C to +90 °C (Bulk) -20 °C to +60 °C (Taping)		
Minimum Quantity/Packing Unit		2,000 pcs. Embossed Taping (Reel Pack)		
Quantity/Carton		10,000 pcs.		





Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)



EVPAS

(Embossed Taping)

General dimension tolerance : ± 0.2
 () dimensions are reference dimensions.



Circuit diagram



PWB land pattern for reference

Part Numbers	Operating Force	Travel	Height	Push Plate Color	Operating Life
EVPASCB1A	2.2 N	1.0 mm	5.0 mm	Black	100,000 cycles
EVPASDB1A	2.5 N	1.0 mm	5.0 mm	Black	100,000 cycles
EVPASAC1A	1.6 N	1.3 mm	5.0 mm	Black	100,000 cycles
EVPASBC1A	2.0 N	1.3 mm	5.0 mm	Black	100,000 cycles
EVPASDC1A	2.5 N	1.3 mm	5.0 mm	Black	100,000 cycles
EVPASEC1A	3.0 N	1.3 mm	5.0 mm	Black	100,000 cycles
EVPASKC1A	3.0 N	1.3 mm	5.0 mm	Black	200,000 cycles (long life type)
EVPASFC1A	3.5 N	1.3 mm	5.0 mm	Black	30,000 cycles
EVPASJC1A	3.5 N	1.3 mm	5.0 mm	Black	100,000 cycles (long life type)







Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVPAS

General dimension tolerance : ± 0.2
 () dimensions are reference dimensions.

(Embossed Taping)
 (Narrow tolerance operating force type)

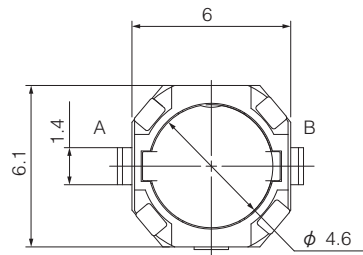

Land pattern plan


Knob color : BLACK

Solder thickness $t=0.15\pm0.03$


Part Numbers	Operating Force	Travel	Height	Push Plate Color	Operating Life
EVPAS4D1A	3.0 N	1.0 mm	5.0 mm	Black	200,000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Recommended Reflow Soldering Conditions

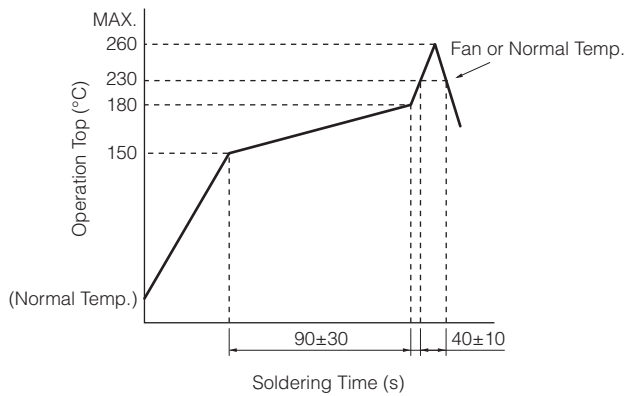

● Embossed Carrier Taping

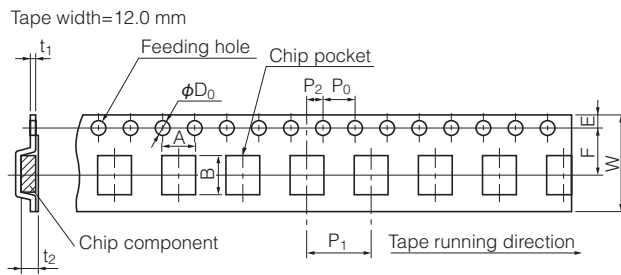

Taping condition : Lack of products in the middle of taping should be one MAX, but total quantity specified in the specifications should be secured.
 Peeling off strength of top tape : It should be within 0.2N to 1.0N at 165 degree in peeling off angle.
 Joint of carrier tape : One joint per one reel may exist.

Unit: mm

Part No.	Height	A	B	W	F	E	P_1	P_2	P_0	D_0 Dia.	t_1	t_2
EVPAS	5.0	6.8±0.2	7.7±0.2	12.0±0.3	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₀	0.4±0.1	5.25±0.20

Guidelines and cautions for using the product technical information and the products displayed on this material

- The products described on this material were designed and manufactured for standard applications such as general electronics devices, office equipment, data and communications equipment, measuring instruments, household appliances and audio-video equipment. For special applications in which quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or cause threat of personal injury (such as for aircraft and aerospace equipment, traffic and transport equipment, combustion equipment, medical equipment, accident prevention and anti-theft devices, and safety equipment), please use only after your company has sufficiently tested our products' suitability for that application.
- When using our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you use protection circuits and redundancy circuits for equipment safety and test for safety.
- The products and product specifications described on this material are subject to change for improvement without prior notice. Therefore, be sure to request and confirm in advance the most current specifications, which explain the specifications in detail, before the final stage of your design, purchasing or use for any application.
- The technical information on this material provides examples of the products' typical operations and application circuits. It is not intended to guarantee the non-infringement of or grant license for intellectual property rights of this company or any third party.
- Permission must be obtained from the Japanese government if products, products specifications and technical information on this material that are subject to the "Foreign Exchange and Foreign Trade Law" are to be exported or taken out of Japan.
- The information contained on this material may not be reprinted or reproduced whether wholly or in part, without the prior written permission of Panasonic Corporation.

Safety Precautions

When using our products, no matter what sort of equipment they might be used for, be sure to confirm the applications and environmental conditions with our specifications in advance.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic[®]

©Panasonic Corporation 2018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[5GTH92001](#) [5GTH9202242](#) [1-1977120-4](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSMW66NV](#) [ADTSMW67RV](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSM21NSVTR](#) [ADTSM32NVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [3ESH9R](#) [506E00201](#) [MJTP1164TR](#) [3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#) [101-TS5022T1601-EV](#) [5GSH92001](#) [KSJ0A231](#) [80SH LFG](#) [EVQ-P1D05K](#) [MJTP1162TR](#) [ADTSM63KV](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [KMT011MNGJLHS](#) [B3WN6002S](#) [ADTSA648RV](#) [70-201.0](#) [ADTSM62KSVTR](#) [ATA600VTR](#) [ADTSG66RV](#) [ADTS61NV](#) [ADTSM62KVTR](#) [ADTSM25KSVB](#)