


5N Type Side-operational 4R Light Touch Switches

Type: **EVQPC**

■ Features

- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

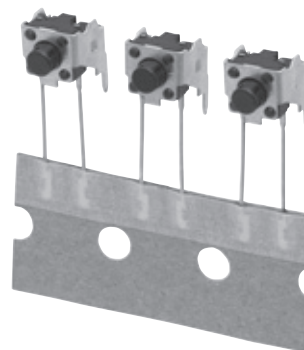


■ Recommended Applications

- Operating switches for electronic equipment

! To Be Discontinued
Last time buy: December 31, 2020

■ Explanation of Part Numbers

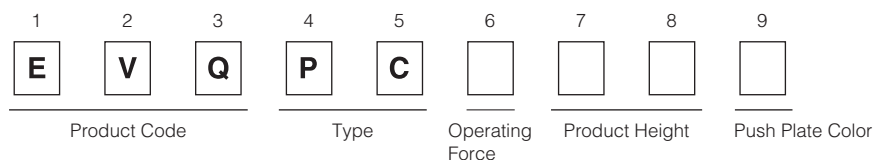

■ Specifications


Type	Snap action/Push-on type SPST	
Electrical	Circuit Diagram	
	Rating	10 μA 2 V DC to 20 mA 15 V DC (Resistive load)
	Contact Resistance	50 mΩ max.
	Insulation Resistance	50 MΩ min. (at 100 V DC)
	Dielectric Withstanding Voltage	250 V AC for 1 minute
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)
	Operating Force	1.0 N±0.4 N 1.3 N±0.4 N 1.6 N±0.5 N
Endurance	Travel	0.25 mm±0.10 mm
	Operating Life	100,000 cycles min.* 50,000 cycles min.
Operating Temperature		-20 °C to +70 °C
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +40 °C (Taping)
Minimum Quantity/Packing Unit		700 pcs. Radial Taping (Reel Pack)
Quantity/Carton		7,000 pcs.

*1 million cycles also available, consult our salesmen.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.


■ Dimensions in mm (not to scale)


EVQPC

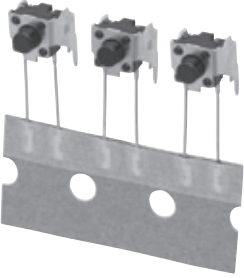


General dimension tolerance : ± 0.2
() dimensions are reference dimensions.


To Be Discontinued
Last time buy: December 31, 2020

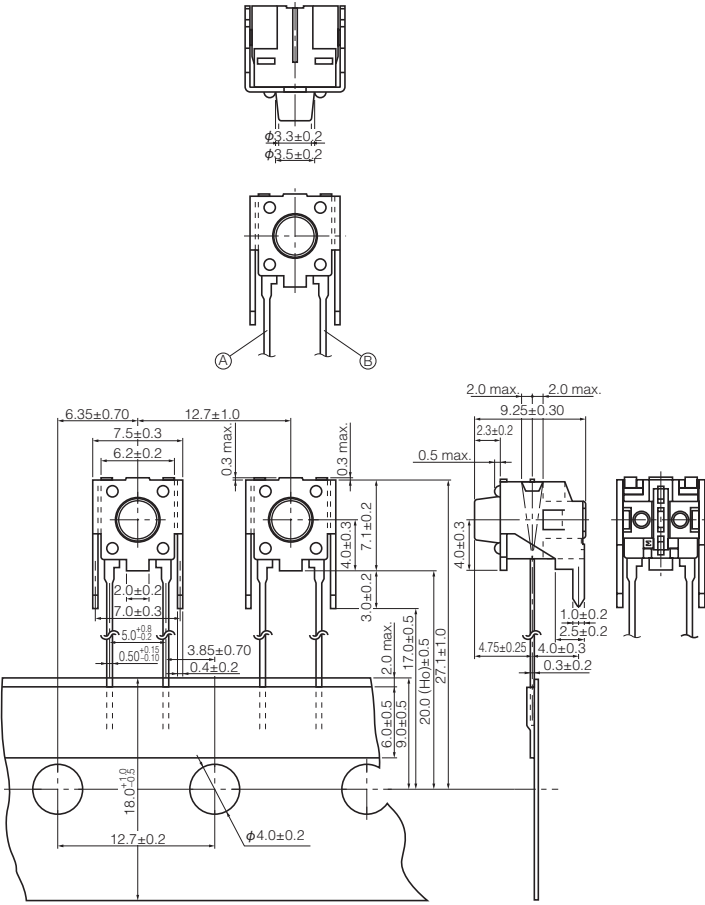



Circuit diagram



PWB mounting hole for reference
(Pitch tolerance: ±0.1)
View from mounting side

Part Numbers	Operating Force	Push Plate Place	Push Plate Color	Operating Life	Insert Machine	H ⁰ Dimension
EVQPC005K	1.0 N	4.75 mm	Black	100,000 cycles	Panasert	20 mm
EVQPC105K	1.3 N	4.75 mm	Black	100,000 cycles	Panasert	20 mm
EVQPC205K	1.6 N	4.75 mm	Black	100,000 cycles	Panasert	20 mm
EVQPC305K	2.6 N	4.75 mm	Black	50,000 cycles	Panasert	20 mm
EVQPC405K	1.0 N	4.75 mm	Black	100,000 cycles	Avisert	21 mm
EVQPCP05K	1.3 N	4.75 mm	Black	100,000 cycles	Avisert	21 mm
EVQPC605K	1.6 N	4.75 mm	Black	100,000 cycles	Avisert	21 mm
EVQPC705K	2.6 N	4.75 mm	Black	50,000 cycles	Avisert	21 mm

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[5GTH92001](#) [5GTH9202242](#) [1-1977120-4](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSMW66NV](#) [ADTSMW67RV](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSM21NSVTR](#) [ADTSM32NVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [3ESH9R](#) [506E00201](#) [MJTP1164TR](#) [3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#) [101-TS5022T1601-EV](#) [5GSH92001](#) [KSJ0A231](#) [80SH LFG](#) [EVQ-P1D05K](#) [MJTP1162TR](#) [ADTSM63KV](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [KMT011MNGJLHS](#) [B3WN6002S](#) [ADTSA648RV](#) [70-201.0](#) [ADTSM62KSVTR](#) [ATA600VTR](#) [ADTSG66RV](#) [ADTS61NV](#) [ADTSM62KVTR](#) [ADTSM25KSVB](#)