


# SANYO

## Cadnica

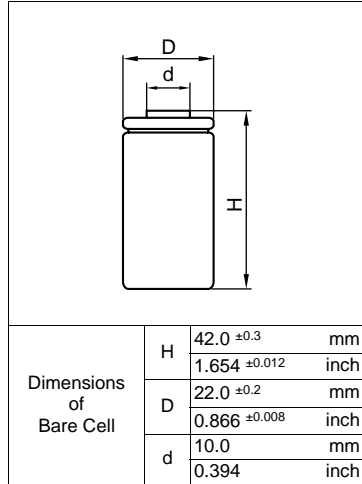


## Cell Type KR-1800SCE Specifications


Nominal Capacity		1800mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	180mA	
	Fast	2700mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		6.5mΩ (at 1000Hz)	
Weight		49g/1.73oz	
Dimensions(D)×(H) (with tube)		22.9 <sup>0</sup> <sub>-1</sub> × 43.0 <sup>0</sup> <sub>-1.2</sub> mm	
		0.90 <sup>0</sup> <sub>-0.04</sub> × 1.69 <sup>0</sup> <sub>-0.05</sub> inch	

### Typical Characteristics


Charge

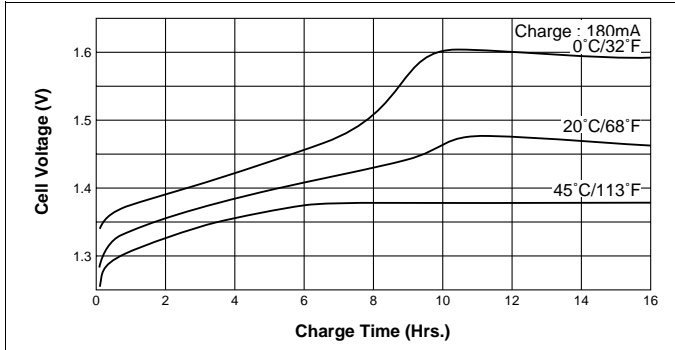


Discharge (at high rate)

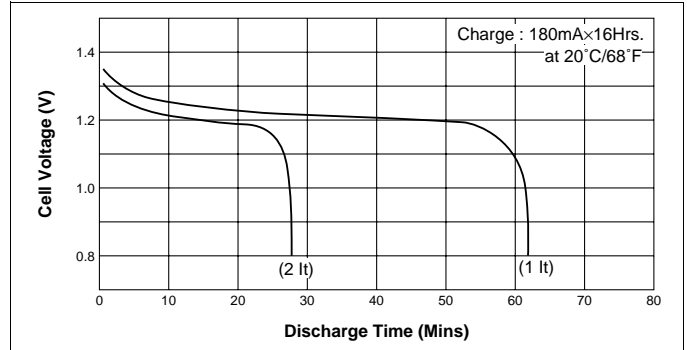


Charge

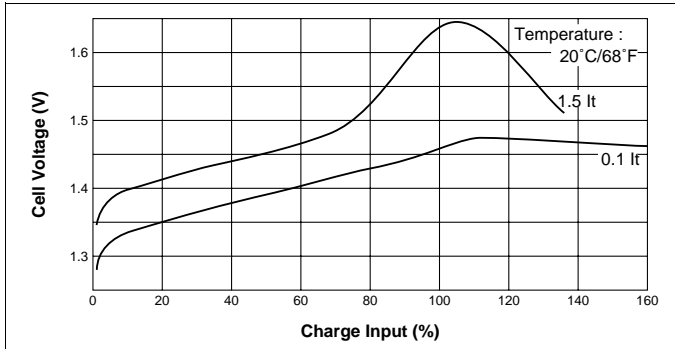


Discharge (at high rate)

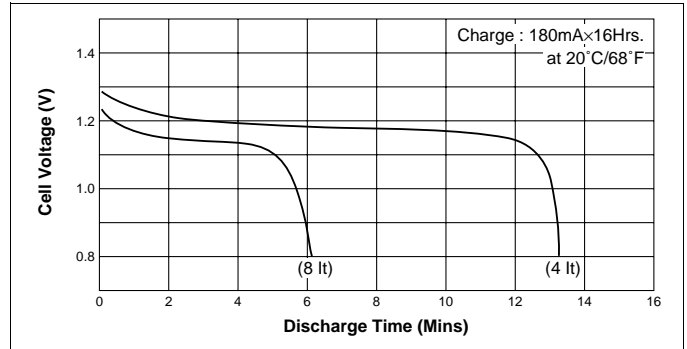

Discharge (at low rate)

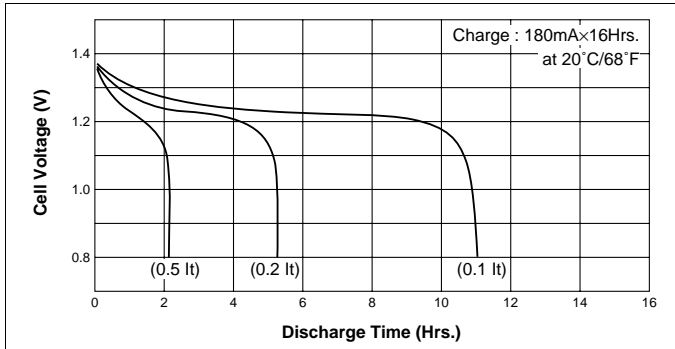

Temperature (Charge & Discharge)

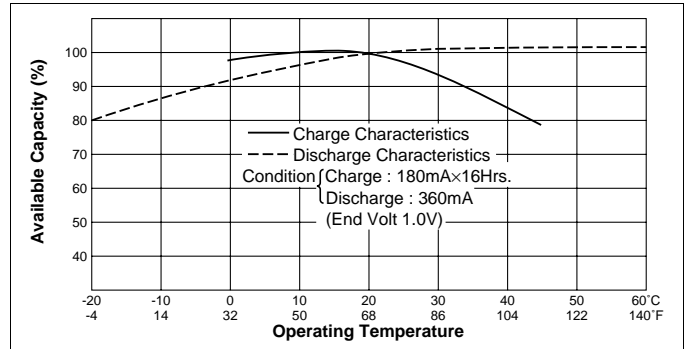

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [NiCd - Nickel Cadmium Battery](#) category:*

*Click to view products by [Panasonic](#) manufacturer:*

Other Similar products are found below :

[PS-CX](#) [PS-2/3AA](#) [PS-AA](#) [PS-2/3A-T](#) [PS-A](#) [PS-SC](#) [PS-AAX-T](#) [PS-DL](#) [PS-1/2D-T](#) [PS-850AA-T](#) [PS-D-T](#) [PS-F](#) [PS-C-T](#) [PS-CH](#) [PS-CX-T](#)  
[PS-C](#) [PS-AAX](#) [PS-850AA](#) [PS-2/3AA-T](#) [PS-1/2D](#) [N-700AAC](#) [KR1800SCE](#) [PS-2/3A](#) [PS-AAA](#) [PS-D](#) [15568-1](#) [N-3000CR](#) [PS-AA-T](#)