LF Series

microSDHC / microSDXC Memory Card, Consumer TLC Model

Product Outline

 $\rm LF$ series are microSDHC / microSDXC memory cards adopting built-in TLC NAND flash memory. They are formatted complying with SD card specification.

■ **Product Specification** (specifications and appearances may be changed without notice.)

| | | 8GB | 16GB | 32GB | 64GB |
|--------------------------------------|--|--|--|---|---|
| Appearance | | Panasonic Micro Cere (4) BGB Made in Taiwan | Panasonic Micro (1) Letter I (1) 16GB Made in Taiwan | Panasonic Micro II III II S2GB Made in Taiwan | Panasonic Micro II ACC II 64GB Made in Taiwan |
| Part Number | | RP-SMLF08DA1 | RP-SMLF16DA1 | RP-SMLF32DA1 | RP-SMLF64DA1 |
| Capacity | Available user data area capacity *1) | 7,960,756,224 byte | 15,514,697,728 byte | 31,092,342,784 byte | 62,528,290,816 byte |
| Compliant Specification | SD Physical Specification | Ver. 3.01 | | | |
| | SD speed class | CLASS (4) | CLASS | | |
| | UHS speed grade | | I U | | |
| | Speed mode | Default Speed Mode, High Speed Mode, | Default Speed Mode, High Speed Mode, SDR12/SDR25/SDR50/DDR50/SDR104 | | |
| Backside mark | Control Code | | | | |
| Read/Write Performance (up to) | Read | 20MB/s (High Speed) | 80MB/s (SDR104) | | |
| | Write | 5MB/s (High Speed) | 10MB/s (SDR104) | | |
| Absolute Maximum Ratings | Supply Voltage | Min : -0.3 V ; Max : +4.6 V | | | |
| | Input Voltage | Min : -0.3 V ; Max : VDD +0.3 V | | | |
| | Output Voltage | Min : -0.3 V ; Max : VDD +0.3 V | | | |
| | Output Current | Min : -24 mA ; Max : +24 mA | | | |
| Environmental Specification | Operating Temperature | -25 degree C to +85 degree C | | | |
| | Storage Temperature | -40 degree C to +85 degree C | | | |
| | Humidity | 5 % RH to 95 % RH | | | |
| | Vibration | 15 Gp-p | | | |
| | Shock | 1,000 G | | | |
| *1) | Mating Cycles | 10,000 cycles | | | |

*1) Free user area capacity after formatted.


Absolute Maximum Ratings are the values of limitation, which do not damage the card. So those values do not define the operational range.

Products comply with EU RoHS directives.

Panasonic

RP-SMLFxxDA1

■Marking Specification (example: 16GB)

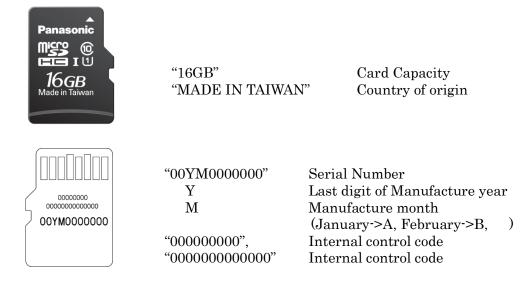

System Reliability

- a. Error detect and corrective function
- b. Static wear leveling
- c. Bad block management

Notice and Caution

If you think about the usage for which special quality or reliability of the products is needed and failure or malfunction of the products may directly threaten life or injury for the special usage (aeronautic or cosmic usage, military usage, combustion machine, life support applications or safety applications), please counsel with our contacts in advance.

Write frequency and storage temperature will affect data retention time. Please make a backup for important data.

Warranty

If the product cannot be used because of failure which is determined as defect in design or in production of the product, it is replaced by same product or equivalent one within 12 months from the delivery date of product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Memory Cards category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below :

SQF-ISDS1-8G-21C_USDCOEM-32GB_CAE1B256GTFDWB00EAA0_CAE1B064GTFDWB00EAA0_CAE1B128GTFDWB00EAA0 LMEX1L128GG2_LMEX1L256GG2_LMEX1L016GG2_LMEX1L032GG2_LMEX1L064GG2_SDSDQAF4-032G-I_SDSDQAF4-256G-I_AP-CF016GKBNS-ETNRG_CFLSH-002PDG_CFLSH-016SDG_MS-C6-8G_HMC-EF283_SDCFXPS-032G-X46_SDCFXSB-128G-G46 SDU4GDPGRB_5788667-1-CUT-TAPE_RP-SMLE32DA1_SDC4GDPGRB_2729389_VTDCFBP1004G_SDSDAF3-016G-XI_2403484 VTDS41PI008G_SDSDAF3-016G-I_VSFCS2CC060G_SDSDAF3-032G-XI_SDSDAD-016G_SDSDAF3-008G-XI_SDSDAF3-008G-I SDSDQAB-016G-J_VTDCFBP1008G_M1A0-0160R12_M1A0-0320R12_M1A4-0160R12_M1A4-0320R12_M1AA-0160R12_M1AA-0320R12_ M1AA-1280R12_SDCFXPS-256G-X46_SDSDXPK-128G-GN4IN_SDSDXXY-064G-GN4IN_SDSDXXY-128G-GN4IN_SDSDXXY-256G-GN4IN_SDSDXXY-512G-GN4IN_SDSQXA1-128G-GN6MA