


LAT-CON SOCKET, Series 050, 2,54mm, IDC

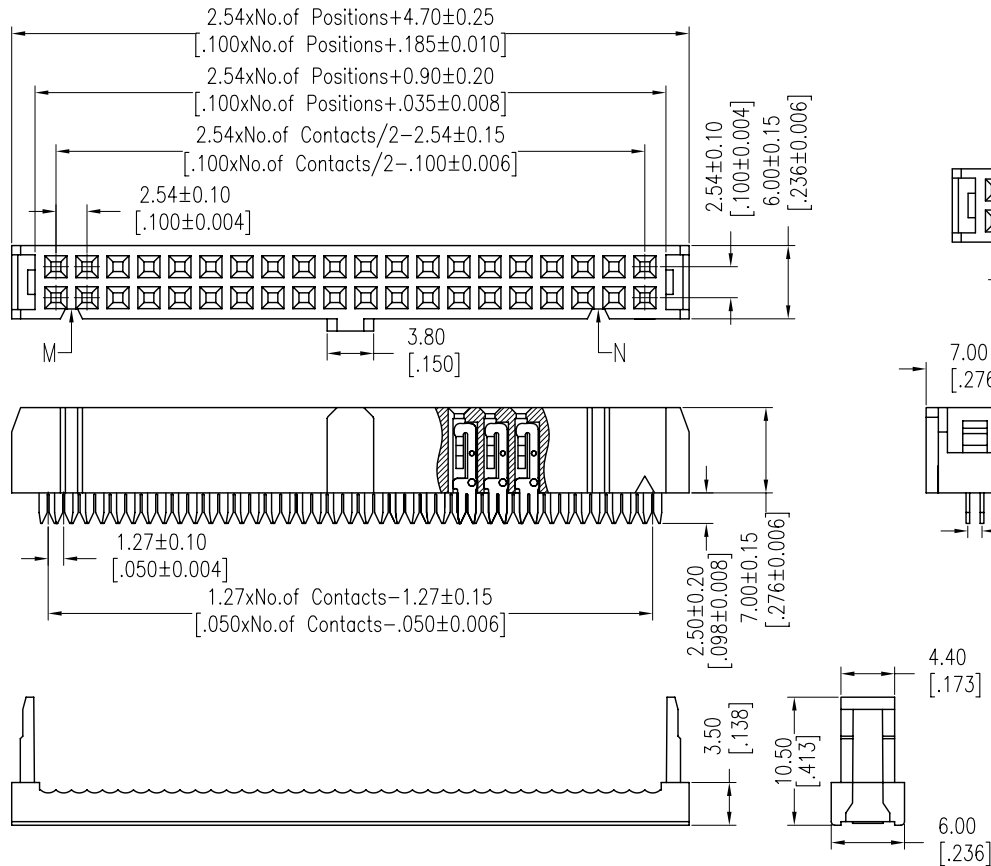


NOTES:
 Current Rating: 3,0 AMP
 Contact Resistance: 20mΩ max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min.
 Operation Temperature: -40°C to +105°C



Contact Material: Copper Alloy
 Contact Plating: Au or Sn over Ni
 Insulator Material: PBT GF (UL94 V-0)

| Positions | Slot M | Slot N | OPERATION | |
|-----------|--------|--------|-----------|-------|
| 6 | | | X.X | ±0.40 |
| 8 - 12 | x | | X.XX | ±0.25 |
| 14 - 64 | x | x | X.XXX | ±0.15 |
| | | | Angle | ± 3° |
| | | | DIM | TOL |

Connector:

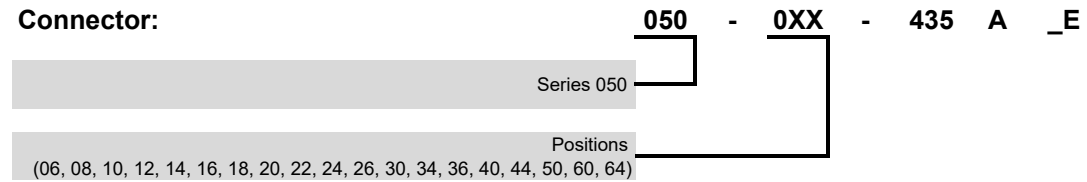

Strain Relief:

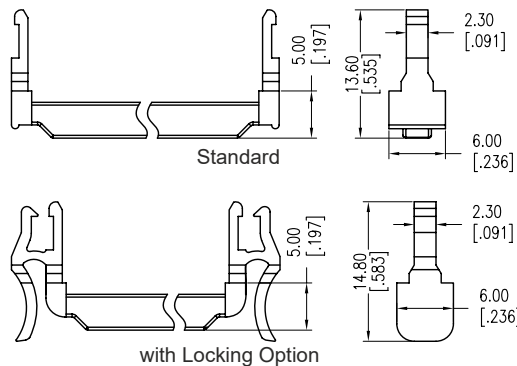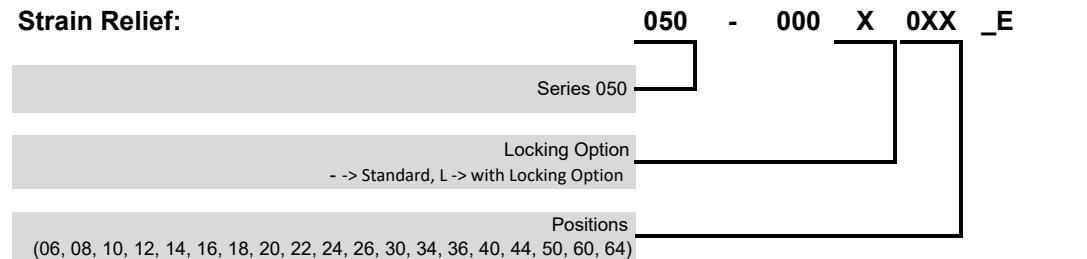

| REV | DATE | NOTE | NAME |
|-----|------------|-------------|------|
| 3 | 16.04.2021 | Parts added | JAL |
| 2 | 15.03.2021 | PN updated | JAL |
| 1 | 26.11.2019 | issued | LAD |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Pancon](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[821-22-002-10-001101](#)