


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

CATALOG NUMBER	STRANDED COPPER CONDUCTOR SIZE (AWG)		NO. RIBS	DIMENSIONS - IN (mm)				COLOR CODE	WIRE STRIP LENGTH	INSTALLATION TOOLING PANDUIT DIE PART NO. DIE SET COLOR & INDEX NO. NO. OF CRIMPS ()	
	RUN	TAP		A	Q	T (MATERIAL THICKNESS)	V			CT-2001	CT-1700**
CTAPF10-16-C	14	16-14	0	.41	.13	.06	.19	RED	1/2	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	12	16-12		[10.4]	[3.3]	[1.5]	[4.8]				
	10	14									
CTAPF8-12-C	10	10	0	.67	.19	.07	.26	BLUE	11/16	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	8	12		[17.0]	[4.8]	[1.8]	[6.6]				
CTAPF6-12-C	8	10-8	0	.67	.24	.07	.32	GRAY	11/16	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	6	12-10		[17.0]	[6.1]	[1.8]	[8.1]				
CTAPF4-12-C	6	8-6	1	1.25	.28	.07	.40	BROWN	1-5/16	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	5,4	12-8		[31.8]	[7.1]	[1.8]	[10.2]				
CTAPF3-12-C	5,4	6-5	1	1.25	.31	.08	.46	GREEN	1-5/16	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	3	12-6		[31.8]	[7.9]	[2.0]	[11.7]				
CTAPF2-12-C	4	4	1	1.25	.33	.08	.51	PINK	1-5/16	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	3	5		[31.8]	[8.4]	[2.0]	[13.0]				
	2	12-6									
CTAPF1-12-C	3	4-3	2	1.82	.40	.08	.57	BLACK	1-7/8	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	2	5-4		[46.2]	[10.2]	[2.0]	[14.5]				
	1	12-5									
CTAPF1/0-12-L	2	4-2	2	1.82	.42	.09	.63	ORANGE	1-7/8	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	1	4-3		[46.2]	[10.7]	[2.3]	[16.0]				
	1/0	12-4									
CTAPF2/0-12-Q	1	2-1	2	1.82	.48	.09	.71	PURPLE	1-7/8	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	1/0	3-2		[46.2]	[12.2]	[2.3]	[18.0]				
	2/0	12-3									
CTAPF3/0-12-Q	1/0	1-1/0	2	1.82	.55	.09	.81	YELLOW	1-7/8	CT-920, CT-920CH, CT-2920, CT-930, CT-930CH, CT-940CH*, CT-2940*	
	2/0	2-1		[46.2]	[14.0]	[2.3]	[20.6]				
	3/0	12-2									

*CT-940CH AND CT-2940 REQUIRE CD-940-DA ADAPTER FOR CDM-920DIES
 **CT-1700 CRIMP DIE POCKETS ARE INTEGRATED INTO THE TOOL HEAD

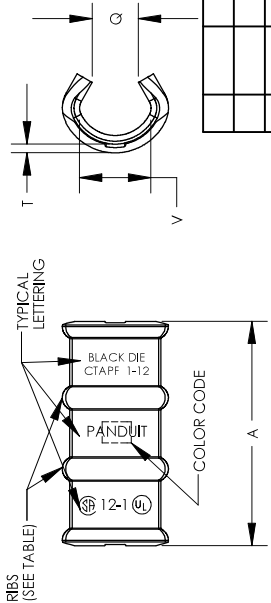

PANDUIT CORP. TINLEY PARK, ILLINOIS
 NON-INSULATED THIN-WALL C-TAP CONNECTORS
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (X) ± — (XX) ± — (XXX) ± — ANGLES ± —		SCALE	NONE
DRAWN BY		DATE	SEE NOTES
E/C		ECN	CUST'CH'KD
DWG NO / CAD FILE		C41172_05	
DWG SIZE		B	

- NOTES:
- MATERIAL: COPPER
 - UL LISTED AND CSA CERTIFIED FOR APPLICATIONS UP TO 600 VOLTS. TEMPERATURE RATING 90 °C
 - PACKAGE QTY:
-L = 50
-C = 100
-Q = 25

REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST'CH'KD
05	11/09	JHN/J	JHN/J	CONVERTED DWG TO SOLIDWORKS		
04	10/02	SAB	SAB	REMOVED T&B TOOL INFORMATION & ADDED 2 COLUMNS OF PANDUIT TOOL INFORMATION		
03	6/02	SAB	JAC	REMOVED CT-740 & CT-2001 TOOL COLUMN & ADDED T&B COLUMN		
02	9/01	SAB	RJS	REVISED & REDRAWN, ADDED CTAPF10-I-6-C		
01	9/97	TIM	WJB	REVISED RIBS		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#) [76650-5002](#) [76828-149](#)