



REFERENCE VIEW
(FRONT CVRSBC4)

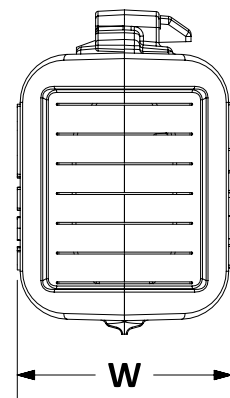

REFERENCE VIEW
(SIDE CVRSBC4)

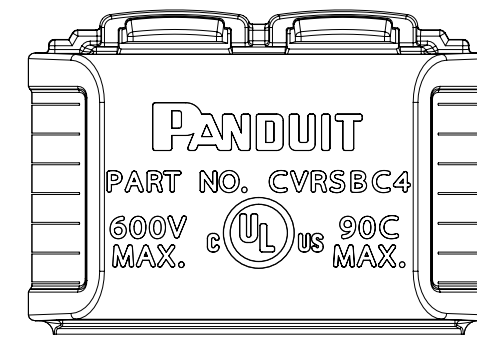

REFERENCE VIEW
(BACK CVRSBC4)

PANDUIT PART NUMBER	DIMENSIONS - IN [mm]			cULus LISTED FOR USE WITH PANDUIT SPLIT BOLT PART NUMBERS
	L	W	H	
CVRSBC4	2.40 [61.0]	1.12 [28.3]	1.70 [42.9]	SBC8-C
				SBC6S-C
				SBC4S-C
CVRSBC2	2.70 [67.4]	1.32 [33.5]	1.92 [48.8]	SBC3-C
				SBC2-C
CVRSBC2/0	3.10 [78.4]	1.55 [39.3]	2.40 [61.0]	SBC1/0-L
				SBC2/0-Q

NOTES:

- MATERIAL: FLAME RETARDANT POLYPROPYLENE, UL94V-0
- cULus LISTED to UL486A-B
- UL RATED FOR:
 - MAXIMUM OPERATING TEMPERATURE RATING: 90 deg C
 - MAXIMUM VOLTAGE RATING: 600V



PART NUMBER		CVRSBC4, CVRSBC2, CVRSBC2/0	
TITLE			
INSULATING COVER (FOR PANDUIT SPLIT BOLT CONNECTORS)			
CUSTOMER DRAWING			
ITEM REVISION NAME		-	
DATASET FILE NAME		-	
		THIRD ANGLE PROJECTION	
MATERIAL		see TABLE and NOTES	
DRAWN BY		BKA	
DATE		01/10/2018	
CHK		BKA	
SCALE		N/A	
DRAWING NUMBER		00093FGD-DC	
SHEET 1 OF 1		B	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	8/20/2018	BKA	JBN	RGRO	RELEASE	038817

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panduit](#) manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [CBXJ2IW-A](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#)
[CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-049-C0](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMBR-13](#) [PCPA11IW](#)
[CRE32](#) [M200X042UPT](#) [M200X050ACT](#) [M200X050Y7T](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-](#)
[1004](#) [CT-1104](#) [CT-2550CH](#) [CT-2570CH](#) [M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#)
[CVED40VEN](#) [CVED40VEPG](#) [CWF400](#) [CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#)
[MBH-TLR316](#)