



PANDUIT PART NO.		HOUSING COLOR	WIRE RANGE mm ²	MAX INSUL DIAMETER
PREFIX	PK			
DMV1-63P	-XY -LY	RED	0,5-1,0 (22-18)	3,30 (.13)
DMV2-63P	-X -L	BLUE	1,5-2,5 (16-14)	4,06 (.16)

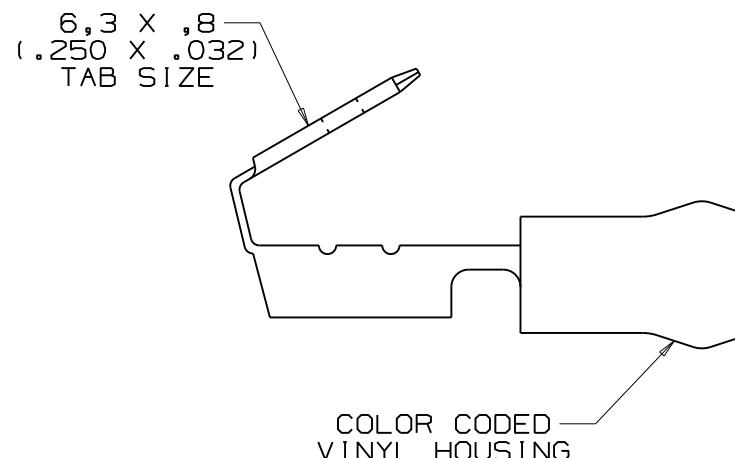

NOTES:

1. USED FOR:
 - A. 300V MAX. VOLTAGE RATING
 - B. 90° C (194° F) MAX. TEMP. RATING
 - C. STRANDED COPPER WIRE ONLY
2. WIRE STRIP LENGTH: 6,3 ^{+,8} (1/4 ^{+1/32})
-0 -0
3. PACKAGE QTY:
-X, -XY=10, -L, -LY=50, -M, -MY=1000
4. DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG.
5. INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525
6. MATERIAL:
STAMPING: BRASS, TIN PLATED
HOUSING : VINYL

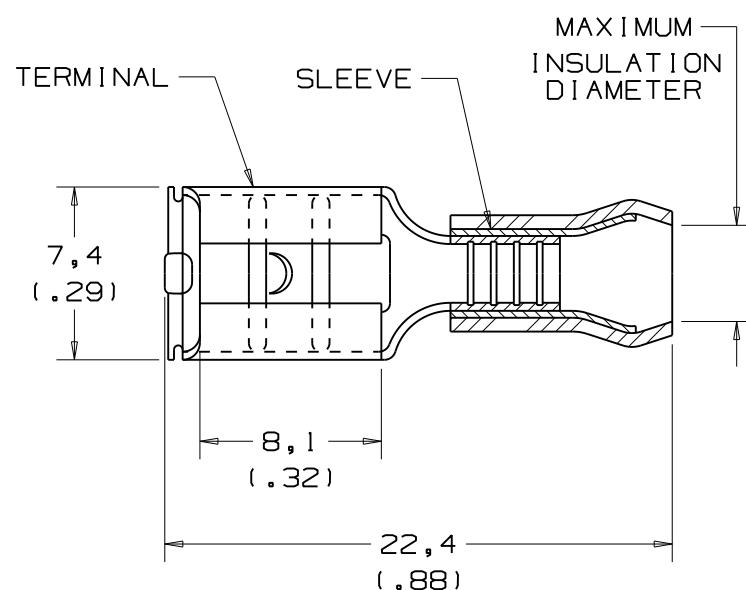

07	8/08	BCT		REMOVED DMV1-63P-MY & DMV2-63P-M				
06	8/08	BCT		MODIFIED DMV1-63P PKG CODE TO -LY				
05	10/08	SRB		Changed packaging codes from "C" to "L"				
REV	DATE	BY	CHK	DESCRIPTION	CUST	PM	DRAWN BY	SCALE
							BDK	CHK'D
								NONE
								DRAWING NO.
								A41526

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

VINYL INSUL. METRIC PIGGYBACK DISCONNECTS
6,3 X 0,8 TAB SIZE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Panduit manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#) [CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMCR-13](#) [PCPA11IW](#) [CRE32](#) [M200X042UPT](#) [M200X050ACT](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-1004](#) [CT-1104](#) [CT-2550CH](#) [CT-2570CH](#) [M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#) [CVED40VEN](#) [CVED40VEPG](#) [CWF400](#) [CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [CWST](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#) [MBH-TLR316](#) [MBSH-TR](#) [MBS-MR](#)