


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART # | TAB SIZE in. [mm]                | WIRE RANGE  |                        | COLOR | MAX. WIRE INSULATION DIAMETER | DIMENSIONS in. [mm] |               |               | TOOL CHART                      |                                |
|----------------|----------------------------------|-------------|------------------------|-------|-------------------------------|---------------------|---------------|---------------|---------------------------------|--------------------------------|
|                |                                  | ENGLISH AWG | METRIC mm <sup>2</sup> |       |                               | L ± .03 [0,8]       | W ± .01 [0,3] | H ± .01 [0,3] | PRESSES: CP-861, CP-862, CP-871 | APPLICATOR DIES: CA9, CA-800EZ |
| DNF18250FIBX   | .250 X .032 [6,3 X 0,8]          | 22-18       | 0,5-1,0                | RED   | .21 [5,4]                     | .93 [23,6]          | .35 [8,9]     | .22 [5,5]     | CD-800-6<br>CD9-6B              |                                |
| DNF18205FIBX   | .205/.187 X .032 [5,2/4,8 X 0,8] |             |                        |       |                               | .87 [22,1]          | .31 [7,9]     | .22 [5,5]     |                                 |                                |
| DNF18206FIBX   | .205/.187 X .020 [5,2/4,8 X 0,5] |             |                        |       |                               | .87 [22,1]          | .31 [7,9]     | .22 [5,5]     |                                 |                                |
| DNF14250FIBX   | .250 X .032 [6,3 X 0,8]          | 16-14       | 1,5-2,5                | BLUE  | .24 [6,1]                     | .93 [23,6]          | .35 [8,9]     | .22 [5,5]     | CD-800-8<br>CD9-8B              |                                |
| DNF14205FIBX   | .205/.187 X .032 [5,2/4,8 X 0,8] |             |                        |       |                               | .87 [22,1]          | .31 [7,9]     | .22 [5,5]     |                                 |                                |
| DNF14206FIBX   | .205/.187 X .020 [5,2/4,8 X 0,5] |             |                        |       |                               | .87 [22,1]          | .31 [7,9]     | .22 [5,5]     |                                 |                                |

NOTES:

- USED FOR:
  - STRANDED COPPER WIRE ONLY
  - 221°F [105°C] MAX. OPERATING TEMPERATURE
  - 600V. MAX. BLDG WIRE
  - 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
  - STAMPING: CDA 260 BRASS, TIN PLATED
  - HOUSING: TYPE 66 NYLON
- WIRE STRIP LENGTH: 9/32" <sup>+1/32</sup>/<sub>0</sub> [7,1 <sup>+0,8</sup>/<sub>0</sub>]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- COLORS ARE TRANSLUCENT

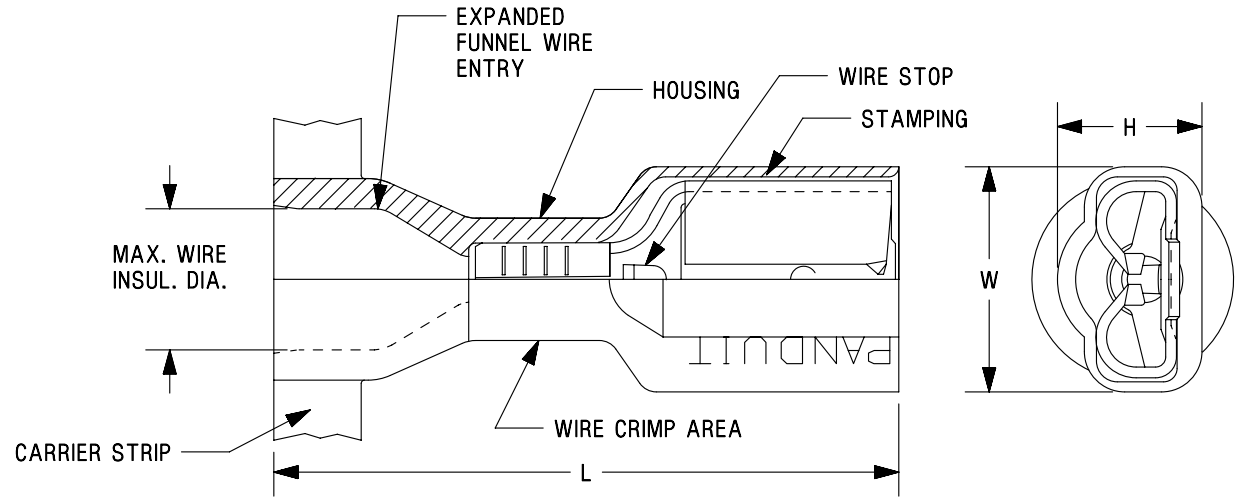

|  |           |                           |
|--|-----------|---------------------------|
| TITLE<br>FEMALE DISCONNECTS, NYLON FULLY INSULATED - EXPANDED WIRE ENTRY<br>CUSTOMER DRAWING   |           | <b>PANDUIT</b>            |
| ITEM REVISION NAME<br>N41167BA/05  |           |                           |
| DATASET FILE NAME<br>N41167BA_DC/05A   |           | MATERIAL:<br>SEE NOTES    |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]<br>.x ± .1 [2.54]      .xxx ± .005 [.127]<br>.xx ± .01 [.25]      ANGLES ± 5 ° |           | DRAWING NUMBER:<br>A41167 |
| THIRD ANGLE PROJECTION   |           |                           |
| DRAWN BY<br>DSM  | DATE<br>- | CHK<br>-                  |
| SCALE<br>N.T.S.  |           |                           |
|  |           | SHT 1 OF 1                |
|  |           | SIZE<br>A                 |

| 05  | 10.10.12 | JBN | LCA | VMB | ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. REVISED INSTALLATION TOOLS NOTE. UPDATED DRAWING TO CURRENT STANDARDS. | A41167 |
|-----|----------|-----|-----|-----|--|--------|
| REV | DATE     | BY  | CHK | APR | DESCRIPTION  | ECN    |

D10100DA/15

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [0-0320562-0](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [63-S](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#)