


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART # <b>A</b>	TAB SIZE		WIRE RANGE		COLOR	DIMENSIONS in. [mm]					TOOL CHART	
	ENGLISH in.	METRIC mm	ENGLISH AWG	METRIC mm <sup>2</sup>		MAX. WIRE INSUL. DIA.	L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	D ± .01 [0,3]	PRESSES: CP-861, CP-862, CP-871	APPLICATOR DIES: CA9, CA-800EZ
DNFR18250FIB-KD	.250 X .032	6,3 X 0,8	22-18	0,5-1,0	RED	.178 [4,52]	.57 [14,5]	.37 [9,4]	.21 [5,3]	.60 [15,2]	CD-800-9 CD9-9C	
DNFR18205FIB-KD	.205/.187 X .032	5,2/4,8 X 0,8										
DNFR18206FIB-KD	.205/.187 X .020	5,2/4,8 X 0,5										
DNFR14250FIB-KD	.250 X .032	6,3 X 0,8	16-14	1,5-2,5	BLUE	<b>A</b>	.178 [4,52]	.57 [14,5]	.37 [9,4]	.21 [5,3]	.60 [15,2]	
DNFR14205FIB-KD	.205/.187 X .032	5,2/4,8 X 0,8										
DNFR14206FIB-KD	.205/.187 X .020	5,2/4,8 X 0,5										

NOTES:

- USED FOR:
  - A. STRANDED COPPER WIRE ONLY
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600V. MAX. BLDG WIRE
  - D. 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
- WIRE STRIP LENGTH:
  - 11/32 +1/32 [8,7 +0,8]
- MATERIAL:
  - A. STAMPING: CDA 260 BRASS, TIN PLATED
  - B. HOUSING: TYPE 6/6 NYLON
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- CURL SLOTS: DNFR18205FIB, DNFR18206FIB, DNFR14205FIB, DNFR14206FIB ONLY.

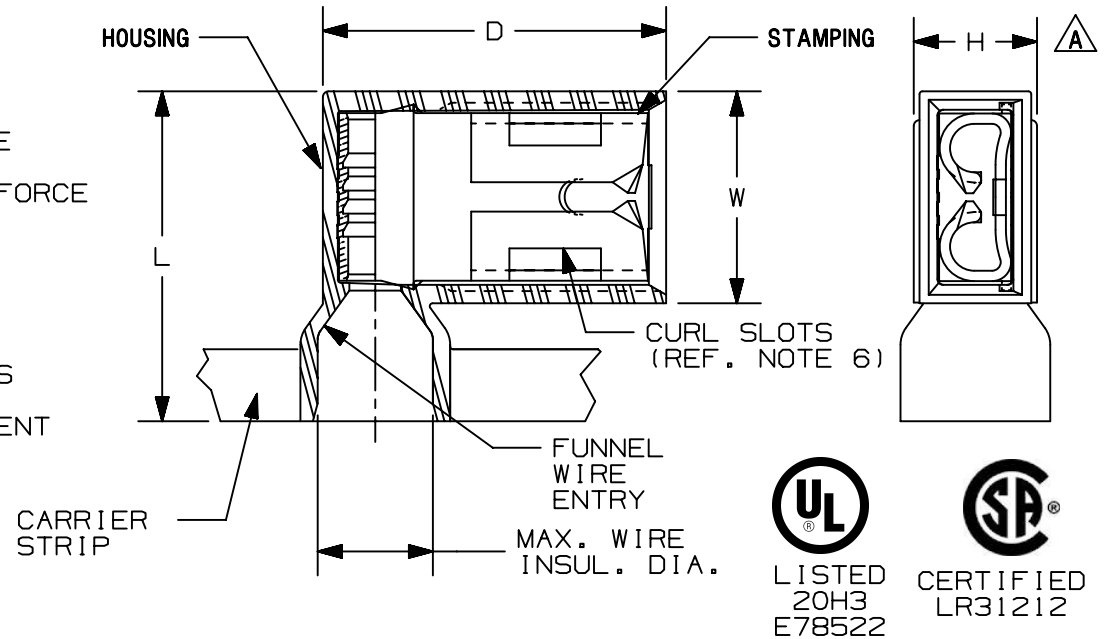

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
---	---	---	---	---	ADDED "REEL SMART" TO DRAWING TITLE.	----
11	2/22/18	BWG	SKB	JADE	<b>A</b> REVISED DIMENSION LOCATION OF HOUSING WIDTH. REMOVED TITLE BLOCK TOLERANCES.	019464/00
10	10.10.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. CHANGE PACKAGING NOTE. ADDED TOOLS CHART. UPDATED DRAWING TO CURRENT STANDARDS.	A41124

TITLE <b>FEMALE DISCONNECTS, NYLON FULLY INSULATED - RIGHT ANGLE REEL SMART</b> CUSTOMER DRAWING <b>A</b>	
ITEM REVISION NAME N41124BA/11	<b>PANDUIT</b>
DATASET FILE NAME N41124BA_DC/11 - A41124_REV11	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.X ± ---	.XXX ± ---
.XX ± ---	ANGLES ± ---
THIRD ANGLE PROJECTION	
DRAWN BY MG	DATE -
CHK -	SCALE N.T.S.
DRAWING NUMBER: A41124	
SHT 1 OF 1	
SIZE A	

D10100DA/15

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [0-0320562-0](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [63-S](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#)