

# SmartZone™ G5 Spot Fluid Leak Sensor

## specifications

The spot fluid leak sensor is designed to reliably monitor a remote location for the presence of water or any other conductive liquid. The sensor can be extended (up to 30m) using a standard RJ-45 coupling.



**SmartZone™ G5 Spot Fluid Leak Sensor**

**Spot fluid link sensor: EE001**

## technical information

<b>Dimensions:</b>	2.4 x 2.4 x .86 inches [60 x 60 x 22 mm]
<b>Mounting:</b>	Cable ties and adhesive backed mounts

\*Mounting hardware included

## key features and benefits

<b>Early fluid detection</b>	Detects fluid in a data center or network closet along the entire length of the sensor cable
<b>RJ45 connection</b>	Utilizes a RJ45 jack on the spot fluid leak sensor assembly to a sensor port on the G5 iPDU or sensor hub
<b>Versatile mounting</b>	Offers versatile mounting options to accommodate easy deployment inside a rack or within a room within a data center or facility building

## applications

The SmartZone™ G5 Spot Fluid Leak Sensor is designed to reliably monitor a remote location for the presence of water or any other conductive liquid. Simply place the fluid sensor on the surface to be monitored. Secure the cable using cable ties and/or adhesive mounts. Note: Certain materials, such as metal surfaces or cement floor, may activate a false leak signal. To avoid


this occurrence, place the sensor on the installation pad (provided). The installation pad is best installed on a clean, dry surface. Next, plug the RJ-45 cable into a sensor port on the G5 iPDU, or sensor hub (EF001). Lastly, go to the Web UI of the G5 iPDU to setup specific conditions to monitor and alarm this sensor.

# SmartZone™ G5 Spot Fluid Leak Sensor

## technical specification


Electrical	
Operational Voltage	5V DC
Measuring Range	Liquids with resistance of <math>\leq 2\text{M}</math> Ohms per cm
Physical	
Length	5m
Environmental	
Elevation Above MSL (Operating/Storage)	0-10000 feet (0-3048m)/0-50000 feet (0-15240 m)
Temperature (Operating/Storage)	0°C~+65°C (32~ 149°F)/-20~ + 70°C (-4 ~ 158°F)
Humidity (Operating/Storage)	10 – 95% RH, non-condensing (operating)
Compliance	
Environmental Verification	ROHS, WEEE

### Spot Fluid Leak Sensor

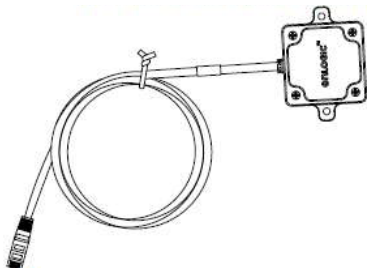

### Adhesive Backed Mount


(quantity: 5)




### RJ45 Quick Disconnect Coupler

**Sold Separately**

Panduit Part Number: CC5E88BL



### Installation Pad

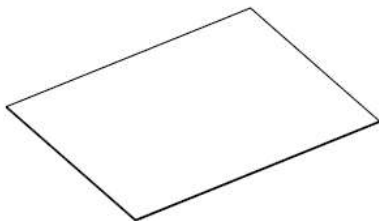

### Cable Ties

(quantity: 5)




### Standard Ethernet

**Extension Cable  
Sold Separately  
2.0m length**

Panduit

Part Number:

UTP28CH2MBL



*Note: The Spot Fluid Leak Sensor is only designed to connect to a G5 iPDU. Connecting it to another device may result in damage.*

#### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

©2018 Panduit Corp.  
ALL RIGHTS RESERVED.  
PUSP68--WW-ENG  
1/2018

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiple Function Sensor Modules](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[AD5T](#) [MM7150-AB1](#) [SIBA5-JRAB-DKL](#) [2314277-1](#) [2314277-2](#) [2314291-1](#) [ZMW-SENSOR-1](#) [2316851-1](#) [1-2314277-2](#) [2316852-1](#)  
[2331211-3](#) [2316852-2](#) [2316851-2](#) [1-2314277-1](#) [CS-95HSS-A](#) [CS-205HSS-A](#) [CS-20SHSS-A](#) [CS-125HSS-A](#) [CS-205SSS-A](#) [CS-125SSS-A](#)  
[CS-95SSS-A](#) [eATVS-4](#) [eATVS-8](#) [tvLYT](#) [NGM\\_1](#) [SKU-7000](#) [DFR0759](#) [SG-Link-200](#) [V-Link-200](#) [MNS2-9-IN-VM-005](#) [MNS2-9-W2-VD-](#)  
[DC](#) [MNS2-9-W2-VM-005](#) [NGM-1](#) [2JCIE-BU01](#) [K6PM-THMD-EIP](#) [K6PM-THS3232](#) [WYZBEE-SENS-101](#) [OB1203SD-C4V](#) [101020932](#)  
[101990693](#) [SIBA5-JRAB](#) [SIBA5-JREB](#) [SIBA5-JREB-DKL](#) [SIBA-JRA](#) [SIBA-JRAB](#) [SIBA-JRE](#) [SIBA-JREB](#) [SEK SCC30-DB](#) [Sample](#)  
[ESYS11X](#) [ESYS11X+LOPY915](#)