


# QuickNet™ PanMPO™ and MPO Small Diameter Trunk Cable Assemblies

## technical information

PanMPO™ Trunk Assemblies are pre-terminated 12-fiber and 24-fiber cable assemblies. The unique design of the PanMPO™ Connector allows for rapid gender and polarity change in the field and enables a seamless, standards-compliant cable plant migration from duplex based applications (e.g. 10G Ethernet) to parallel optics based applications (e.g. 40/100G Ethernet). These small diameter trunk cable assemblies optimize cable routing requirements to ensure efficient use of pathway space and significantly reduce installation time and cost. All trunk cable assemblies are factory terminated and tested to deliver verified optical performance and reliability for improved network integrity.

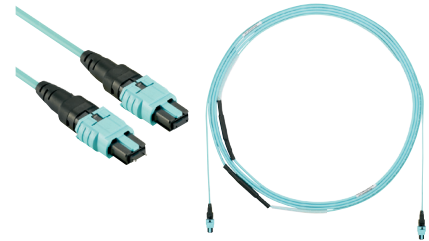

## application

High speed fiber backbone or permanent link when mated to QuickNet™ Cassettes or fiber adapter panels paired with MPO to LC breakout harnesses. Method A and Method B TIA-568-C compliant for 40G/100G parallel optics multimode applications. Allows system designers to tailor configuration, reach and breakout construction to application requirements; to minimize waste, optimize cable management, speed deployment, improve flexibility and manageability for lower installation costs. Small diameter trunk cable assemblies use 30 – 40% less space which is ideal for high cable density applications.

## construction

<b>Cable type:</b>	Indoor Small Diameter Trunk	
<b>Cable jacket ratings:</b>	Optical Fiber Non-conductive Plenum (OFNP) Low Smoke Zero Halogen (LSZH)	
<b>Fiber types:</b>	Multimode:	OM3 50/125µm OM4 50/125µm
	Singlemode:	OS2 9/125µm
<b>Connector types end 'A':</b>	PanMPO™ Female PanMPO™ Male LC duplex (12F only) MPO (singlemode)	
<b>Connector types end 'B':</b>	PanMPO™ Female PanMPO™ Male LC duplex (12F only) MPO (singlemode)	
<b>Fiber count:</b>	12 and 24	
<b>Jacket color:</b>	OM3:	Aqua
	OM4:	Aqua
	OS2:	Yellow

## optical properties

<b>Maximum cable attenuation:</b>	Multimode:	3.5dB/km at 850nm 1.5dB/km at 1300nm
<b>Maximum connector insertion loss (per mated pair):</b>	Singlemode Standard IL:	0.5dB
	Multimode Optimized IL:	0.35dB
	Multimode Ultra Low IL:	0.25dB
<b>Minimum connector return loss:</b>	Multimode:	OM3 30dB minimum OM4 30dB minimum
	Singlemode:	OS2 50db minimum

\*With proper cleaning and inspection

## physical properties

<b>Cable outside diameter (OD):</b>	12-fiber:	4.5mm
	24-fiber:	5.4mm
<b>Minimum bend radius:</b>	30mm	
<b>Cable tensile strength:</b>	12-fiber:	440N
	24-fiber:	660N
<b>Cable compressive load:</b>	10 N/mm	
<b>Flex:</b>	100 cycles at 4.9N	
<b>Connector cable retention:</b>	50N	
<b>Connector durability:</b>	500 mating cycles*	
<b>Breakout outside diameter:</b>	3.0mm	
<b>Transition outside diameter:</b>	12-fiber:	10mm
	24-fiber:	10mm
<b>Pulling eye diameter:</b>	12-fiber:	19mm
	24-fiber:	23mm
<b>Twist:</b>	10 cycles at 15N	
<b>Breakout length:</b>	1m	

## environmental properties

<b>Operating temperature:</b>	0°C to +70°C
<b>Storage and shipping temperature:</b>	-40°C to +70°C
<b>Installation temperature:</b>	-0°C to +60°C

## standards

Meets or exceeds:	ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-5 (FOCIS-5), TIA/EIA-568-C.1, GR-409-CORE, ICEA S-83-596 RoHS Complaint
-------------------	--

# QuickNet™ PanMPO™ and MPO Small Diameter Trunk Cable Assemblies

## part number

Example: FXUYL7E7EAM030 = OM3, 24-fiber, indoor small diameter trunk cable, LSZH, PanMPO™ Female to PanMPO™ Female, polarity A, pulling eye, 30 meters.

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
EXAMPLE	F	X	U	Y	P	7	5	7	5	X	N	F	0	3	0

### 1 – Fiber

F = Fiber

### 2 – Fiber Type

9 = OS2 9/125µm  
X = OM3 50/125µm  
Z = OM4 50/125µm

### 3 – Fiber Count

T = 12 fiber  
U = 24 fiber

### 4 – Cable Type

Y = Indoor small diameter trunk cable

### 5 – Jacket Type

L = Low Smoke Zero Halogen (LSZH)  
P = Plenum (OFNP)

### 6 – Connector Type (End 'A')

5 = Singlemode MPO Female  
6 = Singlemode MPO Male  
7 = Multimode PanMPO Female  
8 = Multimode PanMPO Male

### 7 – Connector Variant (End 'A')

5 = 39" Breakout with transition

### 8 – Connector Type (End 'B')

5 = Singlemode MPO Female  
6 = Singlemode MPO Male  
7 = Multimode PanMPO Female  
8 = Multimode PanMPO Male

### 9 – Connector Variant (End 'B')

5 = 39" Breakout with transition

### 10 – Construction/Performance

A = Singlemode Polarity A - Standard IL  
X = Multimode Polarity A - Optimized IL  
Y = Multimode Polarity B - Optimized IL  
K = Multimode Polarity A - Ultra Low IL  
L = Multimode Polarity B - Ultra Low IL

### 11 – Other

N = No pulling eye (15 - 100ft, 5 - 30m)  
A = Pulling eye end A (>100ft, > 30m)


### 12 – Unit of Length

F = Feet (OFNP)  
M = Meters (LSZH)

### 13, 14, 15 – Cable Assembly Length

015 - 300ft 1ft increments to 100ft,  
5ft increments to 300ft  
005 - 100m, 1m increments

## Small diameter trunk cable assembly detail

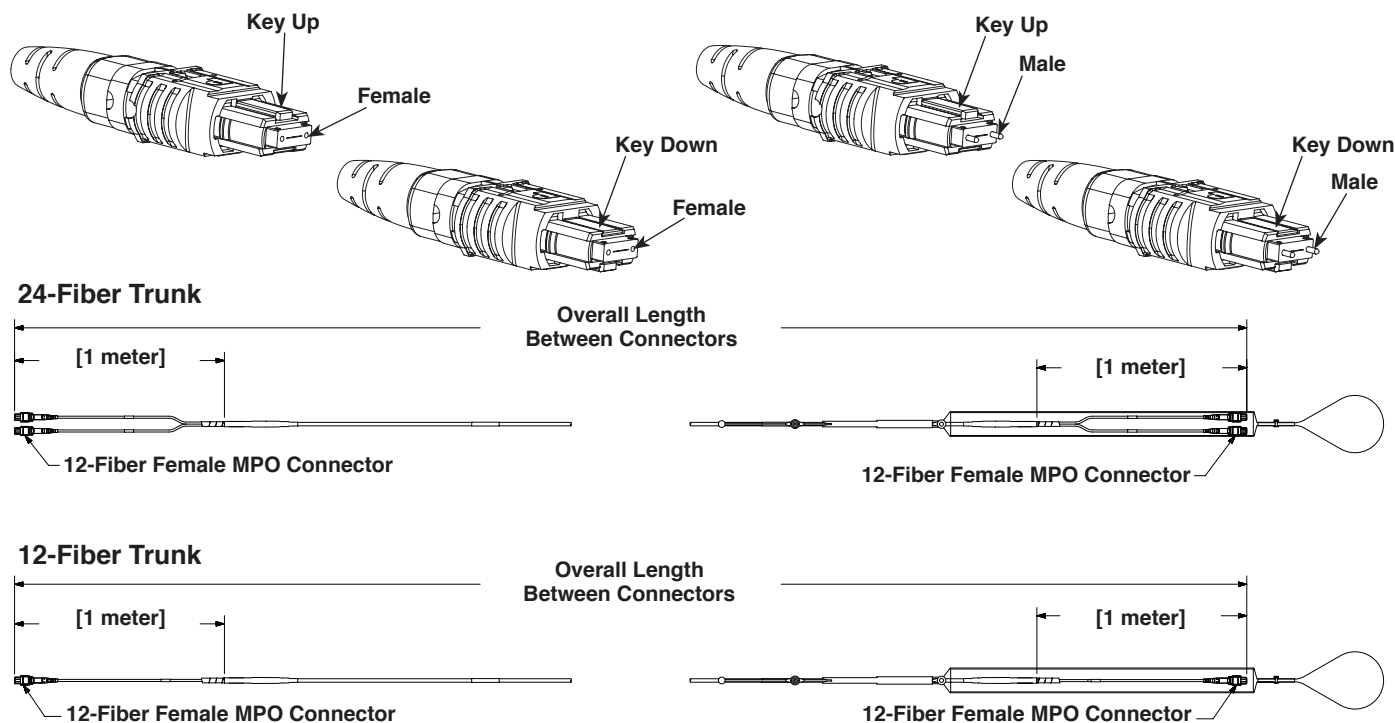

Please contact Panduit customer service for information on additional part number options.

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

©2015 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP94--WW-ENG  
11/2015

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cable Assemblies](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)  
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#)  
[5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#) [2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#)  
[2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#)  
[CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#)  
[FA04474](#) [1083665](#) [1111540](#) [1111843](#) [1115533](#)